



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 :

H04Q

A2

(11) International Publication Number:

WO 97/05749

(43) International Publication Date:

13 February 1997 (13.02.97)

(21) International Application Number: PCT/IL96/00056

(22) International Filing Date: 16 July 1996 (16.07.96)

(30) Priority Data:

08/505,024

21 July 1995 (21.07.95)

US

08/610,617

4 March 1996 (04.03.96)

US

(60) Parent Application or Grant

(63) Related by Continuation

US

Filed on

98/610,617 (CIP)

4 March 1996 (04.03.96)

(71) Applicant (for all designated States except US): CALL MANAGEMENT LTD. (IL/IL); 2 Levi Eshkol Street, 43703 Ra'anana (IL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): WULKAN, Itzhak (IL/IL); 23 Golomb Street, 43303 Ra'anana (IL). BARAK, Gideon (IL/IL); 41 Hahursha Street, 43613 Ra'anana (IL).


(74) Agent: A. TALLY EITAN - ZEEV PEARL & CO.; Lumir House, 22 Maskit Street, 46733 Herzlia (IL).

(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published

Without international search report and to be republished upon receipt of that report.

(54) Title: TELECOMMUNICATIONS CALL MANAGEMENT SYSTEM

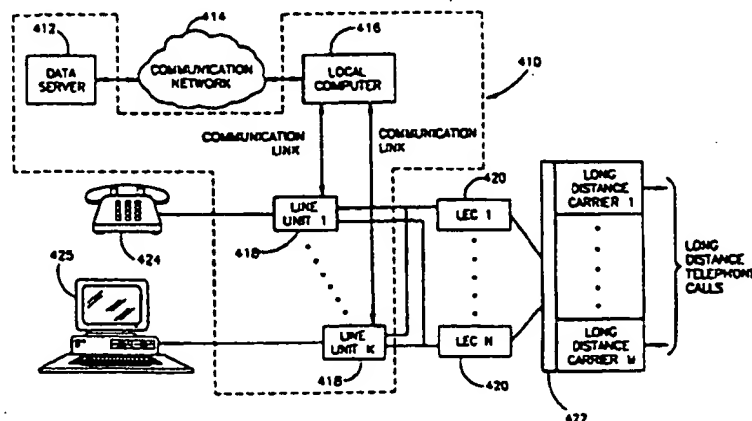

(57) Abstract

A call management system is disclosed for choosing the optimum carrier for calls made by a user. The system can interface with an existing PBX or can be used with ordinary analog or ISDN telephone lines. In a preferred embodiment, the call management system includes a data server, a local computer and one or more line units. The data server holds geographically based tariff data of service providers and transmits the tariff data to the local computer via a communications link. The local computer maintains a communications link with each line unit. In one embodiment, the line unit intercepts the dialed digits and transmits them to the local client computer. The local client computer determines an optimum route for the call based on various parameters and transmits the complete dialing string back to the line unit which does the actual dialing of the digits. The local computer also includes a carrier performance monitoring unit and call accounting unit. The client database is updated on a periodic basis via, for example, electronic mail or FTP over the Internet. The tariff database in the local computer is updated on a periodic basis via, for example, electronic mail or FTP over the Internet.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic			SE	Sweden
CG	Congo	KR	Republic of Korea	SG	Singapore
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LR	Liberia	SZ	Swaziland
CS	Czechoslovakia	LT	Lithuania	TD	Chad
CZ	Czech Republic	LU	Luxembourg	TG	Togo
DE	Germany	LV	Latvia	TJ	Tajikistan
DK	Denmark	MC	Monaco	TT	Trinidad and Tobago
EE	Estonia	MD	Republic of Moldova	UA	Ukraine
ES	Spain	MG	Madagascar	UG	Uganda
FI	Finland	ML	Mali	US	United States of America
FR	France	MN	Mongolia	UZ	Uzbekistan
GA	Gabon	MR	Mauritania	VN	Viet Nam

TELECOMMUNICATIONS CALL MANAGEMENT SYSTEM

FIELD OF THE INVENTION

5 The present invention relates to telecommunications and more specifically, to a call management system for providing least cost routing, associated call accounting and carrier performance monitoring for telephone systems that are connected to analog telephone lines or trunk lines.

BACKGROUND OF THE INVENTION

10 The United States is divided into a plurality of contiguous, non-overlapping exchanges, referred to as Local Access Transport Areas (LATAs), each of which is served by a local telephone company. Telephone calls originating and terminating within the same exchange, referred to as intraLATA calls, are handled end-to-end by a local, intraLATA, telephone company referred to as the Local Exchange Carrier (LEC). Calls
15 originating within one exchange or in a state or foreign country and terminating in a different exchange, potentially in a different state or foreign country, referred to as inter-exchange calls, are handled at each end by the intraLATA company or LEC that services the originating and the terminating exchanges. These inter-exchange calls are carried between the intraLATA companies by one or more inter-exchange carriers, known as long distance carriers.

20 A caller who wishes to select an inter-exchange carrier other than the default primary inter-exchange carrier (PIC) must dial special access codes that are assigned to each inter-exchange carrier and once connected, must sometimes also dial a personal identification code and the number of the called party to have the call completed. With the proliferation of inter-exchange carriers, carrier selection is often difficult for a telephone
25 communication system user. The user may be unaware of which inter-exchange carrier, available in his/her area, is the most economical for a particular time of day, which inter-exchange carrier serves the user's telephone communication system or what access codes are appropriate for the particular inter-exchange carriers available to the user's telephone communication system.

During the last few years, the competition between telephone companies (also known as operating companies, service providers or carriers) for the telephone subscriber business has increased markedly. This competition is most evident in the multiplicity of tariffs from each carrier, which vary not only between destinations but also according to the nature of the contract signed between the subscriber and the telephone company, the time of day, the length of call and other numerous parameters. In addition, competition exists between intra-exchange service providers.

Though this competition gives the customer an opportunity for saving money, the customer rarely fully benefits because of the complexity and the variety of existing tariffs. For example, tariffs may vary due to the time of day, on weekends, holidays, according to the call destination, distance, method of payment and any time limited promotions. The situation may be further complicated by special limited discounts or other incentives offered by the telephone companies, the entry of new telephone companies to new markets and the grade of service requested (i.e., voice quality, connection delays and first time connection establishment success).

The entry of new money saving services, such as Fax Store and Forward and call-back services, the availability of alternate services offered by private networks using their own PBX and the usage of corporate networks are additional factors affecting the cost of the call. Consequently, the customer has to contend with a huge amount of information in order to determine how to make the least expensive telephone call. Because of the complexity of the charging schemes, a cost optimization on a per call basis is nearly impossible for a subscriber to perform by themselves.

Call management systems are applications suitable not just for large businesses with high call volumes but are also suitable for small office/home office (SOHO) as well. The bewildering array of service providers available and the existence of a complicated tariff structure combine to create a need for a system to manage the placement of telephone calls for SOHO applications.

U.S. Patent No. 4,791,665 to Bogart et al. describes a telephone communication system (PBX) with the capability of automatically selecting one of a plurality of inter-exchange carriers. The system includes a database containing access code data associated with the inter-exchange carriers, user authorization codes and information about the various inter-exchange carrier billing rates based on time of day and destination. The PBX

scans the database and reroutes the originating call to one of the other inter-exchange carriers having a cheaper tariff for the particular destination at the specific time of day. The PBX sends out the inter-exchange carrier access code, the user's personal identification code and the called party number dialed by the user to complete the call.

5 U.S. Patent No. 5,425,084 to Brinskele describes a computer controlled telephone communication system which includes a plurality of digital switches each located in different charge zones. Each digital switch is coupled to a file server which determines which of the digital switches to use in order to ensure the lowest possible cost for the call.

10 U.S. Patent No. 5,420,914 to Blumhardt describes a real time selection of one of a plurality of inter-exchange carriers which automatically selects the carrier having the least expensive toll at the time the call is made and reroutes the call accordingly. Blumhardt is used in conjunction with an advanced intelligent network (AIN) in a public switched telephone network (PSTN).

15 U.S. Patent No. 5,425,085, issued to Weinberger et al., teaches a device that interconnects with the telephone line coming from a first phone and routes telephone calls along a least cost route originating from the first telephone to a second telephone via the network. A database stores billing rate parameters for determining various communications paths of different carriers based on parameters such as the time and date of the call.

20 U.S. Patent No. 5,519,769, issued to Weinberger et al., teaches a system for updating a database which stores billing rate parameters for call rating devices associated with a calling station. At predetermined times the calling station calls a rate provider which provides billing rate data parameters for a plurality of calling stations.

25 U.S. Patent No. 5,473,630, issued to Penzias et al., teaches a method of accessing long distance rate information available in a database provided by inter-change carriers. PBXs and telephone central offices access that rate information using ISDN and/or SS7 signaling and use it as a basis for determining which carrier to use at any given time in the routing of a call.

30 In prior art call management systems, updating the tariff database is very complicated since the interface to do so is cumbersome and a huge amount of complex data is involved. Therefore, the operators of the call management system rarely update their

tariff databases. As a result, the routing decision taken may not necessarily be the optimum route for the call, at that time.

SUMMARY OF THE INVENTION

Accordingly, it is an object of the present invention to provide a call management system for performing call optimization on a per call basis, providing subscribers with reduced telephone utility charges.

5 Another object of the present invention is to provide a call management system for performing cost optimization on a per call basis that is transparent to the subscriber and does not require the subscriber to have special know how or skills.

10 It is another object of the present invention to provide a call management system that monitors the quality and performance of the connections made by telecommunications carriers.

 Yet another object of the present invention is to provide a call management system that calculates the least cost route for a particular telephone call.

 Another object of the present invention is to provide a call management system that maintains call accounting on each call made through the system.

15 Yet another object of the present invention is to provide a tariff data server for monitoring and updating changes in telephone service provider tariffs and for downloading a database of tariff data to the local computer.

20 Another object of the present invention is to provide a line unit capable of receiving an abridged version of the database known as the carrier selection database from the local computer.

 It is another object of the present invention to provide a line unit capable of receiving an abridged version of the database known as the carrier selection database from the data server.

25 Yet another object of the present invention is to provide a tariff data server, local computer and line unit that can be linked to a public access network, such as the Internet or a bulletin board system (BBS), in order to make tariff data available to subscribers.

 Another object of the present invention is to provide a call management system for intercepting digits dialed from a subscriber's telephone set and calculating the optimum route for the call.

30 There is therefore provided, in accordance with a preferred embodiment of the present invention, a method of determining an optimum carrier from a group of carriers for

a telephone call dialed by a user, including the steps of intercepting a string of dialing digits, representing the telephone call, dialed by the user, determining the optimum carrier for the telephone call utilizing the dialing digits and placing the telephone call using the optimum carrier.

- 5 In addition, the step of determining an optimum carrier includes the step of choosing a carrier based on the least cost route for the telephone call. The step of determining an optimum carrier the step of choosing a carrier within the group of carriers based on performance and quality of connections made by the carrier. The step of determining an optimum carrier includes the step of choosing a carrier within the group of
10 carriers based on the user's past calling history.

Also included, is the step of appending an appropriate access and/or authorization code to the dialing string. In addition, the method includes the step of updating appropriate internal tables to take into account the telephone call dialed by the user.

- There is also provided, in accordance with a preferred embodiment of the present
15 invention, a call management system including at least one telephone dialing unit, at least one least cost router and a database updating unit. Each telephone dialing unit dials a telephone number to place a telephone call. Each least cost router has a corresponding routing database of tariffs of telephone service providers and determines, from information in its corresponding routing database, which telephone service provider or providers to
20 utilize to execute the telephone call. The database updating unit electronically updates tariff information into each of the routing databases shortly after updated tariff information is entered therein.

- Moreover, in accordance with a preferred embodiment of the present invention, the database updating unit includes apparatus for directly connecting to the at least one least
25 cost router. Alternatively, the database updating unit includes apparatus for providing the updated tariff information to a user who subsequently provides the updated tariff information to the least cost router.

- Additionally, in accordance with a preferred embodiment of the present invention, the telephone service providers can be any of central switching offices, inter-exchange
30 carriers, intra-exchange carriers, fax-store-and-forward providers, call-back providers and private organizational networks.

Further, in accordance with a preferred embodiment of the present invention, the least cost router includes apparatus for generating call history information including date, time, length of a phone call, destination phone number, and service provider utilized. The least cost router utilizes the call history information to determine whether or not a volume discount rate applies to the requested phone call or whether a volume commitment is to be met. It can also utilize the call history information to determine statistics of phone calls and, from the statistics, to generate expected call duration estimates.

Still further, in accordance with a preferred embodiment of the present invention, the telephone dialing unit is formed as part of any one of the following: a Centrex (CTX), a private branch exchange (PBX), CO analog line, ISDN telephone, a cellular telephone and a personal computer.

There is also provided, in accordance with a preferred embodiment of the present invention, a personal computer based telephone dialing system. The system includes a user interface unit, a dialing unit, and a least cost router. The user interface unit indicates a telephone number to be called which the dialing unit dials. The least cost router operates as described hereinabove. Preferably, the least cost router is updated by a database updating unit as described hereinabove.

There is further provided, in accordance with a preferred embodiment of the present invention, a least cost routing updating unit for updating a plurality of remote tariff databases storing therein tariffs of telephone service providers. The updating unit includes database apparatus for storing tariff information, apparatus for receiving changes to the tariff information thereby to create updated tariff information and apparatus for electronically updating tariff information into the plurality of remote tariff databases shortly after the updated tariff information is entered therein.

Additionally, in accordance with the preferred embodiment of the present invention, the apparatus for electronically updating includes apparatus for emulating the interface of a remote tariff database thereby to update the remote tariff database. This can include apparatus for directly connecting to the remote tariff databases and/or apparatus for providing the updated tariff information to a user who provides the updated tariff information to his remote tariff database.

There is thus provided in accordance with a preferred embodiment of the present invention a call management system for determining an optimum route for a telephone call

made by a subscriber, the telephone call routed through one of N local exchange carriers coupled to the system via K telephone lines, each the local exchange carrier coupled to one of M long distance carriers, the system which includes a tariff data server for managing a database containing tariff related information on local and long distance carriers, local exchange, telephone exchange location related data and subscribers, a first communication link coupling the tariff data server to a local client computer, the local client computer for maintaining a client database containing tariff information relevant to the subscribers location, optional calling plans subscribed to or optional calling plans accessible from the subscribers location, the local client computer for determining the optimum route, at least one line unit coupled to a telephone set, the N local exchange carriers and the local client computer or at least a personal information manager (PIM) SW having dialing capability, the at least one line unit for intercepting digits dialed by the subscriber, monitoring one of the K telephone lines, receiving a dialing string from the local client computer corresponding to the optimum route and transmitting the dialing string onto the one of the K telephone lines, and a second communication link coupling the local client computer to the at least one line unit.

In addition, there the tariff data server includes a processor for controlling the operation of the tariff data server, a server database interface coupled to the processor, the server database interface for fulfilling database requests issued by the processor, a server database coupled to the server database interface, the server database containing tariff related information on local and long distance carriers, and a client communications module coupled to the processor and to the first communication link, the client communications module for managing communications between the processor and the local client computer.

Moreover, the tariff data system includes a report generation system coupled to the processor, the report generation system for producing reports from data collected by the system both automatically and manually, and a subscriber interface coupled to the processor, the subscriber interface for managing the collection and maintenance of subscriber supplied data.

Also, the server database includes an optional calling plan database coupled to the server database interface, a distance/local exchange database coupled to the server database interface, a carrier access database coupled to the server database interface, a subscriber

database coupled to the server database interface, and a client database coupled to the server database interface.

In addition, the first communication link may include a telephone line or the Internet.

5 Moreover, the local client computer includes a processor for managing the operation of the local client computer, a client database update module coupled to the processor, the client database update module receiving and processing database downloads from the tariff data server, a line unit interface coupled to the processor, the line unit interface for coupling the processor to the at least one line unit, a least cost router coupled to the processor, the least cost router for determining the optimum route for a call placed by the subscriber, the least cost router returning a carrier dialing string to route the call accordingly, a user interface coupled to the processor, the user interface for providing an interface between the processor and the subscriber, a client database holding tariff data relevant to the subscriber's location and calling preferences, a client database interface coupled to the processor, the client database interface providing an interface between the processor and the client database, a call accounting module coupled to the processor, the call accounting system logging calls placed by the subscriber and determining subscriber call characteristics, and a carrier quality and performance monitoring module coupled to the processor, the carrier quality and performance monitoring module for managing the selection of the long distance carriers based on quality and performance of their connections.

In addition, the system further includes a reporting module coupled to the processor, the second communication link may include an RS-232 link coupling the local client computer to the at least one line unit; a wireless radio frequency link coupling the local client computer to the at least one line unit; or a wireless infrared link coupling the local client computer to the at least one line unit.

In addition, the at least one line unit includes a processor for controlling the operation of the line unit, a dialing receiver coupled to the processor, the dialing receiver intercepting digits dialed by the subscriber and transferring the digits to the processor, a dialer coupled to the processor, the dialer receiving a dialing string from the processor and causing the dialing string to be dialed onto one of the K telephone lines, a local client computer interface coupled to the processor, the local client computer interface providing

the interface between the processor and the local client computer, a pass through coupled to the processor, the pass through having a first and second state, both the first and the second states controlled by the processor, the first state blocking the telephone set from the one of the K telephone lines, the second state coupling the telephone set to the one of the K telephone lines, a line monitor coupled to the processor, the line monitor detecting and interpreting signals occurring on the one of the K telephone lines, and a local exchange selector coupled to the pulse/tone dialer, the processor and the N local exchange carriers via the K telephone lines, the local exchange carrier coupling the pulse/tone dialer to one of the N local exchange carriers in accordance with a control signal produced by the processor.

Moreover, the dialing receiver detects and decodes pulse and dual tone multiple frequency tones or detects and decodes Integrated Digital Network Services (ISDN) signaling information.

There is also provided in accordance with a preferred embodiment of the present invention a call management system for determining an optimum route for telephone calls made by users of a private branch exchange (PBX), each of the telephone calls routed through one of N local exchange carriers coupled to the system via K trunk lines, each local exchange carrier coupled to one of M long distance carriers, the system which includes a tariff data server for managing a database containing tariff related information on local and long distance carriers, a first communication link coupling the tariff data server to a local client computer, the local client computer for maintaining a client database containing tariff information relevant to the subscribers location, optional calling plans subscribed to or optional calling plans accessible from the subscribers location, the local client computer for determining the optimum route, at least one line unit coupled between a user's telephone set and one of the K trunk lines, the at least one line unit coupled to the local client computer, the at least one line unit for intercepting digits outputted by the PBX, monitoring the one of the K trunk lines and receiving a dialing string from the local client computer corresponding to the optimum route and transmitting the dialing string to the one of the K trunk lines, and a second communication link coupling the local client computer to the at least one line unit.

In addition, there is provided in accordance with a preferred embodiment of the present invention a telecommunication call management system for determining an

optimum telecommunication carrier for a telephone call made by a subscriber, the telephone call routed through one of N local exchange carriers coupled to the system via K telephone lines, each the local exchange carrier coupled to one of M long distance carriers, the system comprising a data server for managing a database containing tariff and geographical related information on local and long distance carriers, local exchange, telephone exchange location related data and subscribers and for generating a carrier selection database from selected deterministic and statistical parameters, at least one line unit coupled to a telephone set, the N local exchange carriers and the local client computer, the at least one line unit for intercepting a call dialed by the subscriber, monitoring one of the K telephone lines, choosing the optimum carrier from the carrier selection database and placing the call utilizing the optimum carrier and one of the N local exchange carriers, and a communication link coupling the data server to the at least one line unit.

Moreover, the data server comprises a processor for controlling the operation of the data server, a server database interface coupled to the processor, the server database interface for fulfilling database requests issued by the processor, a server database coupled to the server database interface, the server database containing tariff related information on local and long distance carriers, a client communications module coupled to the processor and to the first communication link, the client communications module for managing communications between the processor and the at least one line unit, a call accounting module for processing call data uploaded from the at least one line unit, a personal data database holding data relevant to the subscriber's location and calling preferences, and a line unit database preparation module coupled to the processor, the line unit database preparation module determining, a priori, optimum carriers for calls placed by the subscriber from the subscriber's location to almost all possible destinations, the line unit database preparation module utilizing the optimum carriers in constructing the carrier selection database.

The communication link may comprise a telephone line or the Internet. The system further comprises a reporting module coupled to the processor.

Further, the at least one line unit comprises a controller for controlling the operation of the line unit, a dialing receiver coupled to the controller, the dialing receiver intercepting digits dialed by the subscriber, a dialer coupled to the controller, the dialer receiving a dialing string from the controller and causing the dialing string to be dialed onto one of the

K telephone lines, a data server interface coupled to the controller, the data server interface for interfacing with the data server through the communication link, a pass through coupled to the processor, the pass through having a first and second state, both the first and the second states controlled by the controller, the first state blocking the telephone set from the one of the K telephone lines, the second state coupling the telephone set to the one of the K telephone lines, a line monitor coupled to the controller, the line monitor detecting and interpreting signals occurring on the one of the K telephone lines, a local exchange selector coupled to the dialer, the controller and the N local exchange carriers via the K telephone lines, the local exchange selector coupling the dialer to one of the N local exchange carriers under the control of the controller, and a carrier selection database comprising carrier selection information for enabling the at least one line unit to determine the optimum carrier for a telephone call.

The at least one line unit further comprises a call history logging module coupled to the controller, the call history logging module logging calls placed by the subscriber and determining subscriber call characteristics, and a performance monitoring module coupled to the controller, the performance monitoring module for managing the selection of the long distance carriers based on quality and performance of their connections, and a volume accumulator module coupled to the controller, the volume accumulator generating call volume data for use in determining the optimum carrier by the data server.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention is herein described, by way of example only, with reference to the accompanying drawings, wherein:

5 Fig. 1 is block diagram illustrating the call management system constructed and operative in accordance with a preferred embodiment of the present invention;

Fig. 2 is a block diagram illustrating the relation of the data server to a plurality of telephone dialing units of the preferred embodiment of the present invention;

Fig. 3 is a flow chart illustrating a method of real time call routing using the call management system of the present invention;

10 Fig. 4 is a detailed flow chart illustrating the step of processing the dialing information;

Fig. 5 is a flow chart illustrating the process of updating the storage unit;

15 Fig. 6 is a high level block diagram illustrating an example of a call management system built in accordance with a preferred embodiment of the present invention and utilizing a generic communications link;

Fig. 7 is a high level block diagram illustrating an example of a call management system built in accordance with a preferred embodiment of the present invention and utilizing the Internet as the communications link;

20 Fig. 8 is a high level block diagram illustrating an example of a call management system coupled to a PBX and built in accordance with a preferred embodiment of the present invention;

Fig. 9 is a detailed block diagram illustrating the tariff data server portion of the present invention;

25 Fig. 10 is a detailed block diagram illustrating the server database portion of the tariff data server;

Fig. 11 is a detailed block diagram illustrating the local client computer of the present invention;

Fig. 12 is a detailed block diagram illustrating the line unit of the present invention;

30 Fig. 13 is a flow chart illustrating a method of real time call routing using the call management system of the present invention;

Fig. 14 is a block diagram illustrating the call management system constructed and operative in accordance with a preferred embodiment of the present invention coupled to a telephone and a computer;

5 Fig. 15 is a block diagram illustrating the call management system constructed and operative in accordance with a preferred embodiment of the present invention coupled to a private branch exchange (PBX) system;

Fig. 16 is a block diagram illustrating the call management system constructed and operative in accordance with a preferred embodiment of the present invention wherein the line units are coupled directly to the communication network;

10 Fig. 17 is a block diagram illustrating the call management system constructed and operative in accordance with a preferred embodiment of the present invention wherein the local computer is eliminated and the line units communicate with the data server through the communication network;

15 Fig. 18 is a detailed block diagram illustrating the local client computer of the present invention;

Fig. 19 is a detailed block diagram illustrating the line unit of the present invention;

Fig. 20 is a diagram illustrating the rate step zones centered around an arbitrary geographic location;

20 Fig. 21 is a flow chart illustrating a method of real time call routing using the call management system of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

Reference is made to Figure 1, which is a block diagram illustrating the call management system constructed and operative in accordance with a preferred embodiment of the present invention. Figure 1 illustrates a simplified version of a telephone communication system, generally designated 10, comprising a single telephone dialing unit 12 in communication with a central switching office (CO) 14 of one of a plurality of telephone service providers. Telephone dialing unit 12 can also communicate with other central switching offices 14 as desired.

The call management system comprises a data server, generally designated 20, which comprises a database 22. The information in database 22 is updated by a data server operator whenever a change is made in any of the published rates of a telephone service provider, such as a local exchange carrier (LEC) or long distance carrier. The updated information is converted into a suitable format for onward transmission and communicated, by data server 20, to telephone dialing unit 12.

The information stored in database 22 includes, inter alia, all available tariff data from the multiplicity of service providers, both inter and intra-exchange carriers, international and others, serving the telephone communication system 10. IntraLATA carriers or LECs are carriers operating within a single Local Area Transport Area (LATA). Calls within the LATA can be either local calls served by the LEC or intraLATA calls served by other carriers as well. If the dialing system operates with more than one central switching office, the following is also stored: tariffs for the different central switching offices, local exchange coordinates, enabling the calculation of exchange distances, carrier availability, access code per exchange and a list of all the exchanges constituting a local call for each exchange. The information may be stored in any convenient format, known in the art, such as a look-up table or a database.

Data server 20 further comprises a central processing unit (CPU) 24 and communication means such as a modem 26 or other similar apparatus for communicating via telephone lines (e.g., dedicated T1, ISDN, broadband communications, etc.) or via any suitable data communication network (e.g., the Internet). Central processing unit 24, which may be any commercially available processor, controls the operation of data server 20. Modem 26 is used to transfer updated data directly to dialing unit 12. Alternatively,

modem 26 can transfer updated data to a third party, such as an electronic mail (e-mail) address from where it may be collected by dialing unit 12 or by an operator.

Telephone dialing unit 12 comprises a dialing unit, such as a tone or pulse telephone dialer, a modem or an ISDN dialing unit, and also comprises a storage unit 30 and a router (or route selector) 32. Storage unit 30 is any storage medium, known in the art, which can be used, inter alia, for storing the provider and tariff information received from data server 20. Storage unit 30 may also be used to store any other relevant data, such as subscribed to carriers, special negotiated discounts, promotions, call statistics data and call accounting data, which may be needed by the router to calculate the optimum least cost route (LCR) for telephone calls. Router 32 can be any routing unit, known in the art, which recognizes the dialing information input by the call originator and, in accordance with pre-defined parameters, calculates the LCR and consequently reroutes the call. Router 32 can also include routing features as described hereinbelow.

Whenever telephone user (or subscriber) 18 originates a call, router 32 intercepts the digits of the dialed number and processes the calling information. Note that the telephone call may not only be generated by a human but also by a machine. Thus, the 'user' may be a human or a machine. Router 32 then accesses storage unit 30, calculates the least cost routing (LCR) data to ascertain the optimum route for the call, adds any necessary access and authorization codes, and then passes the resulting route selection data to dialing unit 12. Dialing unit 12 then initiates the call to CO 14 which routes the call in accordance with the route selection data signals sent by dialing unit 12. If there is more than one CO, dialing unit 12 also physically switches the connection to the selected CO 14.

In order for telephone user 18 to obtain the maximum benefit from the plurality of constantly changing tariff rates, it is necessary to maintain an accurate and updated database in storage unit 30. Whenever a change in any of the tariffs is made by any of the providers or central switching offices, the information stored in database 22 is updated by the data server operator. An updated file is then sent by modem 26 to storage unit 30, either directly or preferably via e-mail or the Internet. Alternatively, a diskette containing the updated information can be loaded directly by the telephone user 18 into the storage unit 30, as is known in the art.

Reference is now made to Figure 2 which is a block diagram illustrating the relation of data server 20 to a plurality of telephone dialing units 102. For simplicity, each

telephone dialing unit 122 is shown communicating with only one CO 14. Embodiments having similar elements have similar reference numerals throughout.

In a first embodiment, telephone dialing unit 102 comprises a computer, such as a personal computer (PC) 104 connected to a modem 106. PC 104 and modem 106 are of types commercially available. PC 104 comprises a central processing unit (CPU) 108 which controls the operation of the PC 104 and optionally a built-in dialer 110. Modem 106 is used to receive data from data server 20 (double line 112) and to connect dialing unit 102 to CO 14 (double line 114). Modem 106 maybe a dial-up modem which can alternatively be used to directly dial CO 14, without the need for a separate dialer. PC 104 further comprises the storage unit 30 and router 32, described hereinabove. Built-in dialer 110 is, for example, any commercially available computer based communications program incorporating dialing facilities.

To make a call, user 18 utilizes a user interface, such as a keyboard, a mouse, etc., to initiate the call and dial the number. Router 32 intercepts the digits of the dialed number, processes the calling information and accesses storage unit 30, processes the LCR data and selects the optimum route for the call. The call is then dialed by modem 106 in accordance with the optimum routing information ascertained and correspondingly rerouted via CO 14.

In a second embodiment, telephone dialing unit 102, which is similar to the first embodiment, described hereinabove, is also connected to a telephone communications system serving a plurality of stations, such as a Centrex (or CTX) or private branch exchange (PBX) 120, having a plurality of telephones 122 connected thereto. The PBX 120 does not have any least cost routing capabilities.

In this embodiment, the caller may initiate the call by using the built-in dialer 110 to dial the number, as described hereinabove with respect to the first embodiment. In this case, the call is dialed out via the PBX 120 (double line 124). Persons who are not connected to a PC having the relevant LCR data may dial out via the PBX 120 (double line 124).

In a further embodiment, PBX 120 is connected directly to PC 104. The PBX 120 can be configured to intercept dialing by telephones 122 and access the storage unit 30 and router 32 of PC 104 to extract the optimum LCR information and reroute the calls.

Whenever the PBX 120, which is connected to PC 104, receives a call, the PBX 120 accesses the storage unit 30 containing the LCR data. Router 32 processes the call data and selects the optimum route for the call and then PBX 120 dials this optimum route.

It will be appreciated that the router 32 can be implemented as part of the telephone dialing unit 102, as part of the PBX 120 or between the PBX 120 and the central switching office 14. No matter where the router 32 is implemented, it provides routing for the call initiated by the telephone 122. If the PBX 120 has routing abilities, and the router 32 operates after the PBX 120, the router 32 can change the routing decisions of the PBX 120. This is especially useful if the router of the PBX 120 has a difficult interface and therefore, is not updated often. The user will still receive the least cost route since the router 32 is updated frequently by data server 20.

Data server 20 can communicate with any or all of the systems described hereinabove. Whenever it has update tariff information, it sends the updated information to all of the systems with which it communicates. The data server 20 can also update the tariff information within a prior art router by emulating the operator interface which has to enter the tariff information.

It will be appreciated that the router 32 can also be operated in conjunction with a cellular or wireless telephone. As in the previous embodiments, router 32 can be embedded in such cellular or wireless telephones or it can be formed as a separate unit.

Finally, it is noted that, in accordance with the present invention, the telephone service providers with which the router 32 operates can be any type of service provider, including but not limited to: inter-exchange carriers, intra-exchange carriers, international, fax-store-and-forward providers, call-back service providers, local central switching offices and private networks. For fax-store-and-forward providers and call-back service providers, the router 32 or some other portion of the dialing system manages the protocol by which such providers operate.

Reference is now made to Figures 3 and 4. Figure 3 is a flow chart illustrating a method of real time optimum routing of a telephone call, using the call management system of the present invention. Figure 4 is a detailed flow chart illustrating the step of processing the dialing information.

When a call is initiated, router 32 intercepts the call (step 130) and processes the dialing information (step 132). The router then processes the dialing information, as

described hereinbelow, and calculates, from all the relevant calling and provider charging and subscriber data, which provider is preferred in order to obtain the least cost route (step 134). Having selected the provider, any necessary access and authorization codes are added to the dialing parameters (step 136) and the call re-dialed using the adjusted parameters (step 138).

The step of processing the dialing information is detailed in Figure 4. The call parameters, such as date and time of the call together with the originating and destination numbers, are identified (step 140). Storage unit 30 containing the LCR data is accessed and scanned to retrieve charging data for the particular calling parameters identified in accordance with the distance and the call type (i.e., jurisdiction). The basic cost of the desired call is then determined (step 142).

Storage unit 30 is also scanned to ascertain whether the call initiator is entitled to any special negotiated discounts from one or more providers, and if relevant, the data is retrieved and the relevant discount is applied (step 144). The result is a first value for the cost of the call, per minute.

Optionally, a check can be made to determine whether call accounting data, as is known in the art, is available and if so the relevant data is retrieved (step 146). This data provides a history of the calls made with a particular service provider and is utilized, for example, to determine (step 148) whether or not a volume discount currently applies or whether it is useful to utilize a certain service provider in order to achieve the volume discount. A volume discount cost is produced.

From the call history, statistics of previous call durations can be made. For example, the statistics can be of the call duration per destination phone number, per distance away from the originating phone number or any other statistic. From these statistics, it can be determined if the call is expected to be short or long, in which case, the tariff of one service provider may be better than that of another for the expected length of the call. In addition, a call distribution profile is maintained based on past calling history. The call distribution data and its effect on call pricing are used in estimating the cost of the call. For example, an average call of 1.5 minutes would be cheaper using a more expensive carrier that bills using 6 sec/6 sec billing rather than a less expensive carrier that bills using 60 sec/60 sec billing. A user making many short duration calls, for example 10-15

seconds, would prefer 6 sec/6 sec billing over 60 sec/60 sec billing. An expected cost of the call is produced (step 150).

The above steps are repeated (step 152) for all service providers and the optimum service provider (i.e., the one which provides the lowest cost) is selected (step 154). In addition, the information regarding the call (origin, destination, selected provider, and length of call) are stored in the database for later call history use.

Reference is now made to Figure 5 which is a flow chart diagram illustrating the process of updating storage unit 30 belonging to telephone user 18.

Whenever data server 20 receives notification of a change from one of the telephone service providers or a regulatory body (e.g., changes in the dialing plan of the United States such as new area codes) (step 202), database 22 is revised (step 204). A package containing the updated LCR information is prepared (step 206), for example in the form of a data file. Data server 20 then posts the updated LCR package to an accessible medium (step 208), shown by dashed lines, and notifies telephone user 18, by any suitable means, that an updated file is available for downloading or collection (step 210).

The accessible medium to which the LCR package may be posted include, for example, any suitable forum accessible by modem. For example, the files can be made available by data server 20 to subscribers 18 through a bulletin board (step 212), via file transfer using a file transfer protocol (FTP) (step 214) or world wide web (WWW) (step 216), or similar, such as are available today through the Internet. The updated package can also be downloaded by data server 20 to the user's e-mail address (218) or copied to a diskette and mailed to the user (220).

To update the routing data stored in storage unit 20, user 18 can retrieve (or upload) the updated file, via his modem 106, from one of the sites (described hereinabove) to which it has been downloaded by data server 20. The updated data is then stored in storage unit 30.

In a preferred embodiment, the tariff rate database, the least cost routing process and the telephone line interface circuitry are implemented as a distributed system of interconnected components. A high level block diagram of an example of a call management system constructed in accordance with a preferred embodiment of the present invention is illustrated in Figure 6. The call management system, generally referred to by reference numeral 250, comprises a tariff data server 252, a local client computer 254 and

one or more line units 258. System 250 interfaces to analog lines and/or trunks such as those commonly used with residential or small or medium office PBX telephone systems. Tariff data server 252 holds tariff and subscriber related data. The tariff information includes data on different carriers including both local and long distance telephone companies. The tariff data covers different tariff schemes available from each telephone company at each locality and comprises exchange location data for distance dependent tariffs, carrier availability and access codes and the exchanges constituting local calling areas. The tariff data is downloaded to local client computer 254 either periodically or according to another schedule such as upon a modification to a tariff schedule. Tariff data server 252 is coupled to local client computer 254 by a communications link. The communications link may include any suitable type of link (e.g., the Internet) such as a pair of modems over an ordinary telephone line, leased or private line, etc.

Any number of line units 258, labeled 1 through N in Figure 6, are installed between a telephone set 256 and the public telephone network. In addition to telephone set 256, line units 258 may be coupled to one or more personal computers 257 with telephone dialing capabilities (i.e., attached fax/modem cards). The public telephone network is represented by Local Exchange Carriers (LECs) 260, 262. Each LEC, in turn, is coupled to one or more long distance carriers 264 labeled 1 through M. Long distance telephone calls made by a subscriber are placed by one of N long distance carriers 264. Line unit 258 communicates with local client computer via a communications link. The communications link may be wired or wireless (i.e., RF, infrared, etc.) and is a bi-directional communications channel. When a call is placed, one of the line units 258 intercepts digits dialed by the subscriber through coupled telephone set 256 and routes them to local client computer 254. Local client computer 254 computes the least cost route using various parameters and translates the dialed number into a series of digits that will route the call to the least cost carrier. The translated dialing string is sent to the line unit 258 which actually dials the number. In a preferred embodiment, each line unit 258 is able to connect to any number of N LECs. When more than one LEC is available, local client computer 254 calculates the least cost LEC, in addition to the least cost long distance carrier, and instructs line unit 258 to steer the call to that LEC.

Local client computer 254 controls the determination of the telephone dialing string corresponding to the optimum LEC and long distance carrier. Local client computer 254, a

personal computer (PC) or other suitable computing means, accumulates the outgoing call data (i.e., destination, time, duration, etc.) The collected data serves as the basis for call accounting, call statistics, volume discount, call progress and call savings reports. Note that in the case of a PBX, the call data may be reported via a channel within the PBX rather than the line unit.

Local client computer 254 is typically coupled to more than one line unit 258. Preferably a line unit is coupled to every telephone set in the system. This provides maximum savings by intercepting each call and determining the optimum carrier to place the call through. Each line unit is coupled to local client computer 254 via a wired or wireless communications link. Local client computer 254, in addition to line unit 258 and tariff data server 252, are described in more detail below.

In a preferred embodiment, shown in Figure 7, system 250 utilizes the Internet 266 for the communication link between tariff data server 252 and local client computer 254. System 250 incorporates use of the various standard applications available on the Internet including, but not limited to, electronic mail (SMTP), file transfer protocol (FTP), gopher and the world wide web (WWW). In addition, local client computer 254 is coupled to one or more line units 258 via a wireless link (i.e., RF, infrared, etc.).

In a preferred embodiment, shown in Figure 8, system 250 is adapted to perform call management for users of a small PBX 266. Referring to Figure 8, tariff rate server 252 is coupled, via a communication link, to local client computer 254. A line unit 258 is associated with each trunk in the PBX system. Each line unit is coupled to local client computer 254 via either a wired or wireless communication link. Each line unit is also coupled to one or more LECs 260, which in turn place long distance calls through one or more long distance carriers 264.

The tariff data server 252 will now be described in more detail. A detailed block diagram of the tariff database server is illustrated in Figure 9. Tariff database server 252 comprises a processor 288, a server database interface 286, a server database 282, a client communication module 290, a billing system 292, a report generation system 294 and a subscription interface module 296. As discussed previously, the function of tariff data server 252 is to provide each subscriber with current tariff schedule data to allow the least cost routing module in local client computer 254 (Figure 6) to determine the least cost route in an accurate manner, reflecting up to date tariff information. The server updates a

client database maintained on the local client computer only with tariff data relevant to the subscribers location and which may be based on subscriber provided information. Subscriber location is stored according to the numbering plan area (NPA) and the local exchange (NXX).

5 The tariff data server communicates with the local client computer, located in the client portion of call management system 250, via a communications link. Processor 288 controls client communications module 290, which handles all communications between the tariff data server and the local client computer. Call management system includes an update mechanism to allow a client database to reflect ongoing changes to tariff schedules and carrier's optional calling plans (OCPs). Server communications can take place via any
10 suitable means, such as electronic mail (e-mail) or FTP. A subscriber can choose to receive updates in any one of the following ways: per tariff change or periodically. In both cases, either the entire database can be downloaded or only the relevant database transactions need be sent. In addition, the subscriber or client can initiate a database
15 transmission. Either a complete database download or only a portion of it can be sent via e-mail to the subscriber. The local client computer then extracts from the e-mail message the relevant data and updates its client database.

 In accordance with a further aspect of the present invention, the call accounting information accumulated by the local computer can be uploaded to the data server and
20 analyzed further. Based on this analysis, the data server suggest means for further reducing the telecommunication charges for the subscriber. Example recommendations include changing OCP, subscribing to an additional carrier, getting a direct access number, etc.

 Billing system 292, coupled to processor 288, functions to maintain subscriber information needed for billing purposes, if system services are sold on a monthly basis, and
25 to track and update invoices, bills, payments, etc. for all subscribers. Report system 294 functions to generate various types of reports for system 250. Reports that pertain to subscriber information, OCP reports and carrier reports are an example of the types of reports available. Subscriber interface 296 receives and processes registration forms containing subscriber data. The data is received either via e-mail, fax, regular mail, etc.
30 and the data processed and entered into attached server database 282.

 Server database interface 286 couples processor 288 to server database 282. Server database interface 286 handles all database requests from processor and is responsible for

the maintenance of server database 282. A more detailed diagram of server database 282, showing the individual databases it comprises, is illustrated in Figure 10. Server database 282 comprises an OCP database 300, distance/local exchange database 302, an access database 304, a subscriber database 306 and a client database 308. For all databases
5 comprising the server database, server database interface 286 serves as the interface for database requests from processor 288.

With reference to Figure 10, OCP database 300 contains data on local long distance toll OCPs supported by call management system 250 and covers the following jurisdictions: local intraLATA/intrastate; intraLATA/interstate; interLATA/intrastate;
10 interstate; international (i.e., Canada, Mexico, Hawaii, Puerto Rico); local and overseas. In a preferred embodiment, OCP database 300 includes the following parameters: OCP name, OCP code, carrier code, jurisdiction type, OCP locality, billing method (i.e., mileage, NPA bands, flat rate, etc.), rate data, time of day dependence, day of year dependence, call billing parameters (i.e., initial period rate, overtime period rate), rate
15 period specific (RPS) flag, volume discounts, tapering, discounted countries (i.e., discount percentage - MCI's 'friends and family' OCP), discounted NPAs (i.e., MCI's 'friends and family'), discounted telephone numbers (i.e., MCI's 'friends and family'), prepaid period option, period commitment discount, volume commitment, carrier identity, promotions, optional OCP to be concatenated with (i.e., combineability with volume generated via
20 other types of calls such as other OCPs or 1-800 calls) and validity period.

Distance/local exchange database 302 contains the geographic coordinates (i.e., vertical and horizontal (V & H) data) of all NPA/NXXs. This data enables the calculation of the distances between the calling location and the called destination designated by the NPA/NXX for the purposes of determining if the call is a local or long distance call and to
25 calculate the rate for a long distance call.

Access database 304 contains the following information on a per OCP and geographic basis: availability data, jurisdiction and access method. Availability data includes whether the OCP is available only as a primary long distance carrier, available upon registration as a secondary long distance carrier, available as a casual call (i.e., gypsy)
30 or not available. The access method for each OCP in each NPA may include 10-XXX, 1-950-7D-User Authorization Code (UAC), 1-800-7D-UAC, 1-888-7D-UAC (7D is equivalent to 7 dialed digits).

Subscriber database 306 contains subscriber data, received from the subscriber, and includes the following: subscriber telephone numbers, subscriber's main billing account, subscriber userID, license size (i.e., the number of line units), organization, subscriber contractual OCPs, e-mail address, account number, registration data, last month paid, subscriber name, telephone number, fax number, address, primary carrier including OCP and start date, secondary carriers and related OCPs, associated start dates, subscriber long distance initial volume and monthly volume of credit card calls and 1-800 lines to be summed for volume discount calculation purposes. Means are provided to add/delete/modify subscriber registration data, OCP data and carrier data.

Client database 308 is dynamically derived for each group of subscribers with a common NPA/NXX or for a specific subscriber for their specific region and related data, in accordance with the particular arrangement with the subscriber. The client database provides the necessary data for downloading full or partial databases to subscribers or clients. The data contained in the client database is derived from the other databases and includes information relevant only for that subscriber. The client database includes: a list of all accessible OCPs, the rate step (mileage rings for rate calculation), validity date key and a list of exchanges a call to which is considered a local call. Accessible OCPs are defined as the primary long distance carrier OCP to which the subscriber is registered, other OCPs to which the subscriber registered other than through their primary long distance carrier and all OCPs available at the subscriber location via a casual call (i.e., gypsy) for all other carriers. The rate step comprises three parts: a list of all NPA/NXX to a local call, detailed rate steps for exchanges requiring both NPA and NXX to determine rate step and non-designated NPAs for those NPAs for which the entire NPA is included in one rate step. The validity date key is the latest data for which the client's database is valid.

Local client computer 254 (Figure 6) will now be described in more detail. A detailed block diagram of the local client computer is illustrated in Figure 11. Local client computer 254 comprises a processor 272 coupled to a least cost router 274, a user interface module 276, a client database interface 278, a call accounting module 332, a reporting module 334, a carrier quality and performance monitor 330, a line unit interface 284 and a client database updater 270. The local client computer functions to route a subscriber originated call via the optimum carrier/LEC combination. The optimum route is

determined by calculating the expected call price of a call of average duration via all possible OCPs while considering parameters such as performance and quality and then choosing the carrier associated with the optimum call route.

With reference to Figure 11, client database updater module 270 provides the
5 interface between processor 272 and tariff data server 252. Client database updater 270 receives partial or full database downloads from tariff data server 252 via a suitable method (i.e., e-mail or FTP), decodes the message and updates a client database 280 via client database interface 278. Any commercially available Internet application software package may be used to provide e-mail and FTP functionality. The client database comprises data
10 derived from any or all of the following sources: data downloaded from the tariff data server, data entered by the subscriber or data collected locally.

The data downloaded from the tariff data server has been previously described. The data entered by the subscriber comprises, but is not limited to, the subscriber's name, subscriber's telephone number, main account number, primary carrier and OCP, secondary
15 carriers and OCPs, number of trunks or telephone lines, telephone numbers 1 through N including central office (CO) lines or PBX trunks/extensions and the corresponding PBX access code (if needed) for each telephone number, number of line units installed at the site, line unit ID number for line units 1 through K, ignored prefix numbers, preferred country if OCP selected, preferred NPA if OCP selected, preferred destination if OCP
20 selected, initial long distance call volume, 1-800 normal volume, credit card normal call volume, long distance companies prohibited from being used by subscriber, length of log file and whether on-line display is required. The data collected locally is accumulated via call accounting module 332. Call accounting module 332 functions as a set of meters and provides data necessary for least cost router 274. The meters provide monthly accumulated
25 cost per OCP and, on a per jurisdiction basis, average call length, and a call length distribution table and call establishment duration. In addition, call accounting module 332 functions to log subscriber call data for the generation of periodic reports and to calculate subscriber call characteristics required for least cost router 274. A call distribution profile is maintained based on past calling history. The call distribution data and its effect on call
30 pricing are used in estimating the cost of the call. For example, an average call of 1.5 minutes would be cheaper using a more expensive carrier that bills using 6 sec/6 sec billing rather than a less expensive carrier that bills using 60 sec/60 sec billing. A user making

many short duration calls, for example 10-15 seconds, would prefer 6 sec/6 sec billing over 60 sec/60 sec billing.

For embodiments of the present invention coupled to a PBX, local computer 254 may receive call accounting data directly from the PBX via local interfaces, in addition to
5 or in place of the call accounting data collected by call accounting module 332, since many modern PBXs have call accounting functionality built-in.

Other data collected locally includes data output from carrier performance monitor 330. Since using call management system 250 is likely to encourage the use of small carriers, the performance of the established call connection may vary from call to call for
10 different carriers. The quality and performance of a carrier is measured by the percentage of established calls, the time to call establishment and the voice quality of the transmission line. Percentage of established calls means calls established upon the first attempt. Voice quality is measured by the subscriber, using the telephone set. If the subscriber is not satisfied with the voice quality of the call, a digit sequence, such as 'BAD', may be entered
15 to flag the call as having poor quality. System 250 collects quality and performance related data associated with each call to be able to monitor a carrier's quality and performance. The following data is collected on a automatic basis with no intervention required from the subscriber. All calls which have not been established due to one of the following reasons will be recorded: lack of ring tone or a busy tone, congestion tone (i.e.,
20 fast busy) detected or the call duration was for less than a predetermined minimum. In addition, data collected on a manual basis includes all calls the subscriber flags as 'bad' (i.e., poor quality of connection due to noise, etc.). To avoid the usage of bad quality carriers, once a carrier is first flagged either automatically or by the subscriber, calls will be routed to the second least cost carrier. After a predetermined number of flaggings within a
25 finite time, the carrier will be suspended for a period of time. After a certain number of suspensions within a week, the carrier will be suspended for a week and the user notified accordingly.

In addition to collecting and processing carrier performance data using carrier performance monitor 330, processor 272 may receive carrier performance data from tariff
30 data server 252. The tariff data server may collect its own carrier performance data and make this data available to local computer 254 via downloading.

User interface 276 functions to provide setup screens for entering and updating subscriber supplied parameters. The data entered by the subscriber comprises the subscriber's name, address, organization, user ID, license size (i.e., number of line units) including serial numbers, monitored telephone numbers, e-mail address, main account
5 number, primary carrier/OCP including start date, secondary carrier/OCPs numbered 1 through N including start date, initial long distance call volume, normal 1-800 call volume, normal credit card call volume, registration date, preferred telephone, NPA, country, contact telephone number, contact facsimile number. In addition, user interface 276 displays a call progress report which includes the following information: last used OCP,
10 call destination (telephone number and text), cost and savings for the current and last call.

Reporting module 334 functions to generate the following reports: a savings report, a call accounting report and an unsuccessful call report. The savings report specifies the saving achieved by using the call management system compared to using the default carrier which is the primary inter-exchange carrier (PIC) (i.e., if the call management system was
15 not used). The savings report shows the total saving last month, accumulated saving since the call management system was installed and the calls routed by carriers other than the default (PIC) and the saving for each call for the last month. The call accounting report includes the details of successful calls. The calls are grouped by OCP and appear in calendar order. The call accounting report shows the called destination number,
20 destination city, date, time of day, duration, cost and associated line unit. Various queries may be made to view various call accounting information. The unsuccessful call report is typically used by a subscriber to inhibit usage of low performance and low quality carriers. This report enables monitoring of the grade of service among competitive carriers. The report includes the details of calls which have not been completed due to congestion or no
25 detection of ring or busy tone after digits are dialed. Calls on this report are grouped by carrier. Each entry in the report includes called destination number, destination city, data, time of day, call duration and line unit in use.

Line unit interface 284, coupled to processor 272, functions to provide the interface between processor 272 and the one or more line units 258 installed in the system. Both
30 wired and wireless communication links are supported by line unit interface 284. To support a wired link, line unit interface 284 comprises a conventional RS-232 interface, well known in the art. For wireless links, line unit interface 284 comprises a suitable

conventional wireless link such as RF or infrared, also well known in the art. Each line unit interface 284 maintains a communications link with each of the line units in the system.

Least cost router 274, as described previously, determines, for each call, the least cost carrier/OCP and provides to the line unit the necessary access dialing string along with the number to dial. The input parameters to the least cost router are the following: basic rates including initial period and additional period, caller location (i.e., what carriers and what calling plans are available in the caller's location and what exchanges are considered local), destination mileage and resulting rate steps, billing scheme including initial period duration and additional period, call jurisdiction (i.e., local call, intraLATA, interLATA/intrastate, interstate, international), billing scheme (i.e., mileage dependent, flat rate, band), date and time of day dependency, day of week/year dependency, expected call duration, statistics of call duration (i.e., caller's calling habits), volume discounts, aggregate volume discount for all lines associated with the same main billing account (MBA), volume and discount commitment, promotions in effect, block of time (i.e., a certain amount of time is at a reduced rate during a discount period, e.g. AT & T's Reach Out America calling program), prepaid or free volume, volume commitments, concatenated OCPs for volume discount calculation, taper (i.e., different price for different level of consumption) and discounted countries, area codes, telephone numbers (e.g., MCI's 'friends and family' OCP, Sprint's 'Most'), free day dialing, discounted country, NPA, 1-800 normal volume, credit card call normal volume. Some calls are not modified by the LCR mechanism and are returned to the line unit as dialed. For example numbers with a non-legal NPA, unsupported country codes and NPA/NXXs for which no rate table exists (i.e., 1-800, 1-900, emergency services, collect calls, etc.).

Processor 272 executes one or more ongoing client processes within the local client computer. A call process in the processor is a real time event driven process that includes the following: line monitoring, digit collection and analysis, least cost routing process, line unit interface, call progress display and call logging. Line monitoring is active during all the phases of a call and includes the monitoring of all line units in the system. The line monitoring process receives telephone line status information from each line unit, arranges the data according to line unit and receives the status of each line unit itself, thus obtaining information on all dialed digits and on call start and end information. It maintains

communications with each line unit and periodically sends 'keep alive' messages to each line unit. In addition, dialed digits are collected during the call and are reported to the call logging process.

The digit collection and analysis is evoked by the telephone set going off-hook.

- 5 Once dialed, the call progress display dynamically updates the following information for the user or subscriber: the dialed number, destination city, carrier's identity, call progress phase, call duration, call accumulated dynamic cost and call accounting dynamic saving. The call logging process logs calls which have and have not been processed by the least cost router, faulty calls in which no connection was established (i.e., no ring or busy tone, 10 call was too short, congestion tone, the establishment time was too long, call flagged as bad by subscriber, etc.).

- In addition to a call process, processor 272 executes time driven processes which include volume calculation per carrier and the carrier quality and performance assessment process, discussed previously. The volume calculation includes calculating the volume of 15 each carrier's OCP on a monthly basis and computing an average. The calculated average volume is used to determine the expected volume per carrier and to recalculate the pointer to the volume discount entry. In addition, a process performed weekly calculates the expected volume according to the following formula:

$$\text{expected volume} = \frac{\text{accumulated volume}}{\text{percentage of the month passed}}$$

- 20 Calculating the expected volume helps to eliminate cases where a monthly peak or changes in the usage of a carrier will cause new volumes. If weekly expected volumes differ from the average monthly volume, the appropriate OCPs are updated accordingly. The carrier performance control process decides, on a periodic basis, whether to drop a particular carrier from use. The decision is based on data collected automatically and 25 entered manually by the subscriber, as described previously. In addition, the expiration data of promotions are tracked on a daily basis. The expiration data of each promotion is included in the OCP parameter data.

- It is noted that alternative call management system embodiments may be constructed using any combination of least cost routing unit 274, call accounting unit 332 30 and carrier performance monitoring unit 330. A preferred call management system

embodiment, however, comprises all three units: least cost routing unit 274, call accounting unit 332 and carrier performance monitoring unit 330

Line unit 258 will now be described in more detail. The line unit is positioned between the subscriber's telephone set and the telephone network. As previously disclosed, each line unit maintains a communication link to the local client computer. All digits dialed by the subscriber after the telephone goes off-hook are passed to the local client computer. For calls not relevant to the least cost router, the local client computer returns the dialed number to the line unit as dialed. The line unit, in turn, transmits those digits to the telephone network. An example of calls ignored by the least cost router are: 1-800 calls, 1-888 calls, emergency services (i.e., 911, etc.) and calls to operators (i.e., 0, 0+, 411, etc.). Illustrated in Figure 12 is a detailed block diagram of the line unit portion of the call management system. Line unit 258 comprises a processor 312 coupled to a pulse/tone or ISDN dialing receiver 314, a local client computer interface 316, a LEC selector 322, a pulse/tone or ISDN dialer 320, a pass through module 324 and a line monitor 326. Processor 312 functions to control the internal operation of line unit 258. Pulse/tone dialing receiver 314 is coupled to the telephone set and functions to receive and interpret the digits dialed by the subscriber via the telephone set. The intercepted digits are sent to processor 312 further handling. Local client computer interface 316 is adapted to provide a wired or wireless communication link to the local client computer. For wired links, local client computer interface may implement a standard RS-232 interface or any other PC interface such as parallel I/O, Universal Serial Bus (USB), PC bus extension such as PCI, all of which are well known in the art. If a wireless link is used between the line unit and the local client computer, a standard RF or infrared communication link is implemented, also well known in the art. The line unit interface 284 (Figure 11) in the local client computer is adapted to handle multiple line units by implementing a protocol similar to carrier sense multiple access with collision detection (CSMA/CD), the scheme used in standard Ethernet networks.

Pulse/tone or ISDN dialer 320 is coupled to processor 312 and receives strings of digits to be dialed onto the telephone line. Pulse/tone or ISDN dialer 320 is coupled to LEC selector 322. LEC selector 322 couples the output of pulse/tone or ISDN dialer 320 to one or more LECs. A control signal from processor 312 determines which LEC the output of pulse/tone or ISDN dialer 320 is coupled to. The telephone line from the LEC,

via LEC selector 322, is also coupled to pass through 324 which functions to become transparent when line unit 258 is not active (i.e., powered down). The default state of pass through 324 is to act transparent to the line. In this state, digits dialed by a subscriber are passed transparently through to the telephone line. The state of pass through 324 can be controlled via processor 312.

Line monitor 326, coupled between the telephone set and the telephone line, functions to monitor the telephone line on both sides of the pass through at all times. When an off-hook condition and subsequent dial tone signal is detected on the line, processor 312 opens up pass through 324, disconnecting the telephone set from the telephone network and sends an 'off-hook' signal to the local client computer. The line monitor monitors the line and transfers network signals to the telephone set. All digits dialed will be captured by pulse/tone or ISDN dialing receiver 314, prevented from being transmitted on the telephone line and reported to the local client computer until a connect command is received. Upon receipt of a connect command, processor 312 puts pass through 324 into the transparent state, coupling the telephone set to the telephone network. After a connect line command is received, line monitor listens for the following events and responds with an associated action: call answered (i.e., the called party answered the call) - a 'voice' message is sent to the local client computer; a dial tone cadence - a 'dial tone' message is sent to the local client computer; a ring cadence - a 'ring' message is sent to the local client computer; a busy cadence - a 'busy' message is sent to the local client computer; a congestion cadence - a 'congestion' message is sent to the local client computer. The above list is only presented as an example, other tones may also be included depending on the application.

A flow chart illustrating a method of real time call routing using the call management system of the present invention is shown in Figure 13. Although each step of the process has been previously disclosed in detail above, the flow chart illustrated in Figure 13 is never the less useful in understanding the method of the present invention. First, the call dialed by the user is intercepted either by PBX 120 (Figure 2) or line unit 258 (Figures 6 to 8) (step 350). The dialing information input by the user is captured and stored (step 352). Then, the optimum route or path for the call is then determined (step 354). Either any or all of the following factors may be factored into the decision as to with which carrier to place the call: (1) least cost route for the call, (2) locally derived or

downloaded carrier performance data or (3) the calling history of the user. After the optimum call is determined, any access and/or authorization codes are added to the dialed string (step 356). The call is then dialed (step 358). Internal data structures are then appropriately updated to take into account the call just dialed (step 360).

5 A high level block diagram of an example of a call management system constructed in accordance with a preferred embodiment of the present invention is illustrated in Figure 14. The call management system, generally referred to by reference numeral 410, comprises a data server 412, a local client computer 416 and one or more line units 418. System 410 interfaces to analog lines such as those commonly used with residential and
10 business telephone service. Data server 412 holds tariff and subscriber related data. The tariff information comprises data on different carriers including both local and long distance telephone companies. The tariff data covers different tariff schemes available from each telephone company at each locality. The tariff data is downloaded to local
15 computer 416 either periodically or according to another schedule such as upon a modification to a tariff schedule. Data server 412 is coupled to local computer 416 by a communication network 414. The communications network may include any suitable type of network or communication link such as a pair of modems over an ordinary telephone line, leased or private line, the Internet, local area network (LAN), wide area network (WAN), bulletin board service (BBS), etc.

20 Any number of line units 418, labeled 1 through K in Figure 14, are installed between a telephone set 424 and the public telephone network. In addition to telephone set 424, line units 418 may be coupled to one or more personal computers 425 with telephone dialing capabilities (i.e., attached fax/modem cards). Note that the line units are also capable of being connected to facsimile equipment and modems in addition to telephones
25 and computers. The public telephone network is represented by one or more Local Exchange Carriers (LECs) 420 labeled 1 through N. Each LEC, in turn, is coupled to one or more long distance carriers 422 labeled 1 through M. Long distance telephone calls made by a subscriber are placed by one of N long distance carriers 422. Each line unit 418 communicates with local client computer 416 via a communications link. The
30 communications link may be wired or wireless (i.e., RF, infrared, etc.) and is a bi-directional communications channel. When a call is placed, one of the line units 418 intercepts digits dialed by the subscriber through coupled telephone set 424, determines the

optimum route for the call using the carrier selection table and generates a translated dialing string. The translated dialing string is dialed directly by the line unit 418. In a preferred embodiment, each line unit 418 is able to connect to any number of N LECs. When more than one LEC is available, the line unit, using the carrier selection database, determines the optimum LEC, in addition to the optimum long distance carrier, and steers the call to that LEC.

Local computer 416 receives the tariff database from the data server 412 and customizes it for use by the line unit. Local client computer 416 is a personal computer (PC) or other suitable computing means which also functions to process call history and call accounting data uploaded from the line units. The collected data serves as the basis for call accounting, expected volume discount calculations and call savings reports. Note that local client computer 416 can be coupled to more than one line unit 418. Preferably a line unit is coupled to every telephone set in the system. This provides maximum savings by intercepting each call and determining the optimum carrier to place the call through in accordance with the carrier selection database. Each line unit is coupled to local client computer 416 via a wired or wireless communications link. The local client computer, in addition to the line unit and tariff data server, are described in more detail below.

A block diagram illustrating the call management system constructed and operative in accordance with a preferred embodiment of the present invention coupled to a private branch exchange (PBX) system is shown in Figure 15. The system shown in Figure 15 is similar to that of Figure 14 but highlights the connection of the system to a PBX 430. Coupled to PBX 430 are one or more telephone extension sets 432. Operation of the system 410 in Figure 15 is identical to that of the system shown in Figure 14 except that the line units 418 interface to trunks such as those commonly used with small or medium sized office PBX telephone systems. In addition, all line units can be housed in a single unit sharing one common communication channel between that box and the local computer.

A block diagram illustrating the call management system constructed and operative in accordance with another preferred embodiment of the present invention wherein the line units are coupled directly to communication network 414 is shown in Figure 16. In this preferred embodiment, the data server 412, line units 418 and the local computer 416 are all coupled directly to the communication network.

In another preferred embodiment of the present invention, the call management system is constructed without the local computer 416 as illustrated in Figure 17. In this embodiment, the functions performed by the local computer are performed by the data server 412. The line units operate the same but communicate with the data server through the communication network rather than to the local computer. Thus, the carrier selection database is prepared by the data server and transmitted to the line units through the communication network. The line units upload call accounting information to the data server which analyzes this information in the preparation of the carrier selection database.

The communication network (i.e., the Internet or other suitable network) 414 forms the communication path between tariff data server 412 and the local computer 416. The system can incorporate use of the various standard applications available on the Internet including, but not limited to, electronic mail (SMTP), file transfer protocol (FTP), gopher and the world wide web (WWW). In addition, local computer 416 is coupled to one or more line units 418 via a wireless link (i.e., RF, infrared, etc.).

In this embodiment, the user interface is provided by the data server 412 rather than by the local computer. The user interface on the data server may comprise one or more web pages written using HTTP, the standard language of web sites. A subscriber, using the Internet as the communication network 414, can connect to the data server site to both receive data from and provide data to the data server. Thus, the subscriber's personal data (e.g., negotiated discounts, optional calling plans subscribed to, most dialed area codes, countries and telephone numbers, credits, personal volume or term commitments, etc.) can be directly entered into the data server by the subscriber. Privacy and protection against eavesdropping can be obtained by the data server using an encryption enabled secure web server and subscribers encryption enabled client web browsers.

In the embodiments shown in Figures 14 to 17, system 410 is adapted to perform call management for residential/business users or users of a small PBX 430 (Figure 15). A line unit 418 is associated with each extension in the residential/business system or trunk in the PBX system. Each line unit is coupled to local computer 416 (Figures 14 and 15) via a wired or wireless communication link or directly to the communication network (Figures 16 and 17) via a communication link. Each line unit is also coupled to one or more LECs 420, which in turn place long distance calls through one or more long distance carriers 422.

Data server 412 will now be described in more detail. Data server 412 comprises a processor, a server database interface, a billing system, a server database, a client communication module, a report generation system and a subscription interface module (not shown). The function of data server 412 is to provide each subscriber with current
5 tariff schedule data, related to geographic location, to allow the call management processes in local computer 416 to determine the optimum route for the call. The data server updates a client database maintained on the local computer with data tailored to the subscribers location and which can also be based on subscriber provided information. Subscriber location is stored according to the numbering plan area (NPA) and the local exchange
10 (NXX).

The data server communicates with the local computer via a communications link. The processor in the data server oversees the operation of the client communications module, which handles all communications between the data server and the local computer. The call management system of the present invention includes an update mechanism to
15 allow a client database to reflect ongoing changes to tariff schedules, carrier's optional calling plans (OCPs), numbering plan changes and changes in the geographic layout of exchanges. Server communications can take place via any suitable means, such as electronic mail (e-mail) or FTP. A subscriber can choose to receive updates in any one of the following ways: per tariff change or periodically. In both cases, either the entire
20 database can be downloaded or only the relevant database transactions need be sent. In addition, the subscriber or client can initiate a database transmission. Either a complete database download or only a portion of it can be downloaded or sent via e-mail to the subscriber. The local client computer then extracts from the download or e-mail message the relevant data and updates its client database.

25 The billing system, coupled to the processor in the data server, functions to maintain subscriber information needed for billing purposes, if system services are sold on a monthly basis, and to track and update invoices, bills, payments, etc. for all subscribers. The report system functions to generate various types of reports. Reports that pertain to subscriber information, OCP reports and carrier reports are an example of the types of
30 reports available. The subscriber interface receives and processes registration forms containing subscriber data. The data is received either via e-mail, fax, regular mail, etc. and the data processed and entered into the attached server database.

A server database interface couples the processor in the data server to the server database. The server database interface handles all database requests from the processor and is responsible for the maintenance of the server database. The server database comprises a tariff database, distance/local exchange database, a carrier access database, a subscriber database and a client database. For all databases comprising the server database, the server database interface serves as the interface for database requests from the data server processor.

The OCP database contains data on local and long distance toll OCPs supported by the call management system and comprises the call pricing parameter fields listed in the table below. Note that not all fields are populated for all OCPs.

Deterministic Parameters

1. OCP name
2. OCP code
3. carrier code
4. service type: direct dial, credit card call, operator call, information services, emergency, etc.
5. optional OCP to be concatenated with, i.e., combineability with volume generated via other types of calls such as other OCPs or 1-800 and credit card calls
6. validity period
7. tapering
8. rate period specific (RPS) flag
9. time of day (TOD) dependency
10. date, i.e., workday, Saturday, Sunday or Holiday dependency
11. billing method, i.e., mileage banded, flat, NPA (area code banded)
12. billing parameters, i.e., initial period (time and price), additional period (time and price)
13. carrier relations (PIC, subscribed, gypsy/casual)
14. call surcharge
15. availability as a casual/gypsy call
16. casual/gypsy call surcharge: for calls via telephone companies that the customer does not have a subscription to; may vary according to call jurisdiction, e.g., domestic or international
17. term commitment discount (percentage)
18. same telephone owner discount (percentage): origin and destination belong to the same company; for multisite companies
19. same telephone owner discount (fixed amount): origin and destination belong to the same company; for multisite companies
20. preselected telephone numbers discount (e.g., 'friends and family')
21. preselected NPA discount
22. preselected country discount
23. same telephone company discount
24. personal negotiated discount
25. organizations' discount (percentage)
26. special time limited promotions regarding additional discount (percentage) or credit (fixed)

Statistical Parameters

1. retroactive volume discount: can be different for different jurisdictions and the TOD
 2. retroactive volume discount limit: some carriers do not give a discount beyond a certain limit
 3. precommitted volume discount
 4. minimum commitment (volume that is paid for regardless of use)
 5. prepaid calling volume
 6. same telephone company discount
 7. post priory most frequently called NPA discount
 8. post priory most frequently called numbers discount (e.g., Sprint's 'most')
 9. post priory most frequently called country discount
-

The distance/local exchange database contains the geographic coordinates (i.e., vertical and horizontal (V & H) data) of all NPA/NXXs. This data enables the calculation of the distances between the calling location and the called destination designated by the NPA/NXX for the purposes of determining the call jurisdiction.

- 5 The access database contains the following information on a per OCP and locality basis (which may or may not be related to NPA): availability data, jurisdiction and access method. Availability data includes whether the OCP is available only as a primary long distance carrier, available upon registration as a secondary long distance carrier, available as a casual call (i.e., gypsy) or not available. The access method for each OCP in each
- 10 NPA may include 10-XXX, 1-950-7D-User Authorization Code (UAC), 1-800-7D-UAC, 1-888-7D-UAC (7D is equivalent to 7 dialed digits).

- 15 The subscriber database contains subscriber data, received from the subscriber, and includes the following: subscriber telephone numbers, subscriber's main billing account, subscriber userID, license size (i.e., the number of line units), organization, subscriber contractual OCPs, e-mail address, account number, registration data, last month paid, subscriber name, telephone number, fax number, address, primary carrier including OCP and start date, secondary carriers and related OCPs, associated start dates, subscriber long distance initial volume and monthly volume of credit card calls and 1-800 lines to be summed for volume discount calculation purposes. Means are provided to
- 20 add/delete/modify subscriber registration data, OCP data and carrier data.

- 25 The client database is dynamically derived for each group of subscribers with a common NPA/NXX or for a specific subscriber for their specific region and related data, in accordance with the particular arrangement with the subscriber. The client database provides the necessary data for downloading full or partial databases to subscribers or clients. The data contained in the client database is derived from the other databases and includes information relevant only for that subscriber or his/her locality. The client database includes: a list of all accessible OCPs, the rate step (mileage rings, according to jurisdiction, for rate calculation) and validity date key. Accessible OCPs are defined as the primary long distance carrier OCP to which the subscriber may register or subscribe to,
- 30 other OCPs to which the subscriber may or did register to other than through their primary long distance carrier and all OCPs available at the subscriber location via a casual call (i.e., gypsy) for all other carriers. The rate step comprises three parts: a list of all NPA/NXX to

a local call, detailed rate steps for exchanges requiring both NPA and NXX to create a rate step and non-designated NPAs for those NPAs for which the entire NPA is included in one rate step. The validity date key is the latest data for which the client's database is valid.

5 A detailed block diagram illustrating the local client computer of the present invention is shown in Figure 18. Local computer 416 comprises a processor 478 for managing the operation of the local computer. Coupled to processor 478 are a data server interface 470, a multi-line unit (LU) management module 472, a call accounting module 474, a reporting module 476, a line unit database preparation module 480, a line unit interface 488 and a user interface 482. Also coupled to processor 478 are the following
10 databases: a personal database 486, a call statistics database 485 and a call accounting database.

Also shown in Figure 18 is the tariff database 413, discussed earlier, coupled to data server 412. The data server 412 communicates to local computer 416 via communication network 414 through data server interface 470. The line units 418
15 communication with the local computer via line unit interface 488.

A detailed block diagram illustrating the line unit of the present invention is shown in Figure 19. A controller 440 in the line unit functions to manage the internal operation of the line unit. Coupled to controller 440 are local computer interface 442, carrier selection module 448, volume accumulator module 450, performance monitor 456 and call history
20 logging module 444. In addition, controller 440 comprises databases for holding carrier selection data 462, call history data 464 and performance data 466. Also, a dialing receiver 446 and line monitor/pass through 452 are coupled to controller 440 and to the telephone set or PBX extension. A dialer 458 and line monitor 452 are coupled to the LECs 420 via LEC selector 460.

25 The dialing receiver 446 in the line unit is able to decode pulse/tone or ISDN dialing signals. Similarly, the dialer 458 is able to send pulse/tone or ISDN signals. The pulse/tone dialing receiver is coupled to the telephone set or PBX extension and functions to receive and interpret the digits dialed by the subscriber via the telephone set. The line unit interface 488 in the local computer is adapted to handle multiple line units by
30 implementing a protocol similar to carrier sense multiple access with collision detection (CSMA/CD) or any other suitable multiple drop protocol.

The line unit 418 is positioned between the subscriber's telephone set and the telephone network. As previously disclosed, each line unit maintains a communication link to the local computer. All digits dialed by the subscriber after the telephone goes off-hook are intercepted and processed by the line unit. For calls not relevant to the call management system, the line unit returns the dialed number to the dialer as dialed. The dialer transmits those digits to the telephone network. An example of calls ignored by the least cost router are: 1-800 calls, 1-888 calls, 1-900 calls, calls without cost sensitive alternatives, calls for which the destination may not be recognized by the system (e.g., new area codes), emergency services (i.e., 911, etc.) and calls to operators (i.e., 0, 0+, 411, etc.).

Pulse/tone or ISDN dialer 458 is coupled to controller 440 and receives strings of digits to be dialed onto the telephone line. Pulse/tone or ISDN dialer 458 is coupled to LEC selector 460. The LEC selector couples the output of the pulse/tone or ISDN dialer to one or more LECs. A control signal from controller 440 determines which LEC the output of the pulse/tone or ISDN dialer is coupled to. The telephone line from the LEC, via LEC selector 460, is also coupled to pass through 452 which functions to become transparent when line unit 418 is not active (i.e., powered down). The default state of the pass through is to act transparent to the line. In this state, digits dialed by a subscriber are passed transparently through to the telephone line. The state of the pass through is controlled via controller 440.

Line monitor 452, coupled between the telephone set and the telephone line, functions to monitor the telephone line on both sides of the pass through at all times. When an off-hook condition and subsequent dial tone signal is detected on the line, controller 440 opens up the pass through, disconnecting the telephone set from the telephone network. The user, however, is still able to hear the tones generated by the telephone network. The line monitor monitors the line and transfers network signals to the telephone set. All digits dialed will be captured by the dialing receiver 446 and prevented from being transmitted on the telephone line. Upon determination of the optimum route for the call and dialing the requested number, controller 440 puts pass through 452 into the transparent state, coupling the telephone set to the telephone network. After a connect line command is received, line monitor listens for the following events and responds with an associated action which is processed locally in the line unit: call answered (i.e., the called party answered the call) - a 'voice' message is generated; a dial tone cadence - a 'dial tone'

message is generated; a ring cadence - a 'ring' message is generated; a busy cadence - a 'busy' message is generated; a congestion cadence - a 'congestion' message is generated. in the event ISDN is utilized, the appropriate ISDN signals are generated. Note that the above events are processed internally in the line unit and are not reported to the local
5 computer. The above list is only presented as an example, other tones may also be included depending on the application.

In a preferred embodiment of the present invention, the local computer functions a mediator between the data server and the multiple line units. The actual carrier selection on a call by call basis is not made by the local computer but by each line unit on an
10 individual basis. Carrier data is transmitted from the data server to the local computer via the communication network and processes by the local computer by line unit database preparation module 480. The local computer, in turn, downloads a carrier selection database to each line unit. The line unit then uses the carrier selection database to route a subscriber originated call via the optimum carrier/LEC combination.

15 With reference to Figures 18 and 19, data server interface module 470 provides the interface between processor 478 and data server 412. Data server interface 470 receives partial or full database downloads from data server 412 via a suitable method (i.e., e-mail or FTP). Any commercially available Internet application software package may be used to provide e-mail and FTP functionality. The data that is sent by the data server to the
20 local computer is localized for that particular subscriber's locality. The data comprises rate step information organized by NPA/NXX and other data related to that locality. The localized data stored in the personal database 486 comprises data derived from any or all of the following sources: data downloaded from the data server, data entered by the subscriber or data collected locally via the line unit.

25 The data entered by the subscriber comprises, but is not limited to, the subscriber's name, subscriber's telephone number, main account number, primary carrier and OCP, secondary carriers and OCPs, number of trunks or telephone lines, telephone numbers 1 through N including central office (CO) lines or PBX trunks/extensions and the corresponding PBX access code (if needed) for each telephone number, number of line
30 units installed at the site, line unit ID number for line units 1 through K, ignored prefix numbers, preferred country if OCP selected, preferred NPA if OCP selected, preferred destination if OCP selected, initial long distance call volume, volume and term

commitments, any personal discount, 1-800 normal volume, credit card normal call volume, long distance companies prohibited from being used by subscriber and whether on-line display is required. The data collected locally is accumulated via call history logging module 444 in the line unit and optionally may be uploaded to the local computer to be processed there (e.g., report generation). Call accounting module 474, in the local computer, functions as a set of meters, accumulating volume, and provides data necessary for line unit database preparation module 480. The meters provide monthly accumulated cost per OCP and, on a per jurisdiction basis, average call length, and a call length distribution table and call establishment duration. In addition, call accounting module 474 functions to log subscriber call data for the generation of periodic reports and to calculate subscriber call characteristics required for generation of the carrier selection database 462. A call distribution profile is maintained based on past calling history. The call distribution data and its effect on call pricing are used in estimating the cost of the call. For example, an average call of 1.5 minutes would be cheaper using a more expensive carrier that bills using 6 sec/6 sec billing rather than a less expensive carrier that bills using 60 sec/60 sec billing. A user making many short duration calls, for example 10-15 seconds, would prefer 6 sec/6 sec billing over 60 sec/60 sec billing.

For embodiments of the present invention coupled to a PBX, local computer 412 may receive call accounting data directly from the PBX via local interfaces, in addition to or in place of the call accounting data collected by call accounting module 474 and logged by call history logger 444, since many modern PBXs have call accounting and call logging (i.e., call reporting) functionality built-in.

Other data collected locally includes data output from the performance monitor 456. Since using the call management system of the present invention is likely to encourage the use of small carriers, the performance of the established call connection may vary from call to call for different carriers. The quality and performance of a carrier is measured by the percentage of established calls, the time to call establishment and the voice quality of the transmission line. Percentage of established calls means calls established upon the first attempt. Voice quality is measured by the subscriber, using the telephone set. If the subscriber is not satisfied with the voice quality of the call, a digit sequence, such as 'BAD', may be entered to flag the call as having poor quality. System 410 collects quality and performance related data associated with each call to be able to

monitor a carrier's quality and performance. The following data is collected on a automatic basis with no intervention required from the subscriber. All calls which have not been established due to one of the following reasons will be recorded: lack of ringback tone or a busy tone, congestion tone (i.e., fast busy) detected or the call duration was for less than a predetermined minimum. In addition, data collected on a manual basis includes all calls the subscriber flags as 'bad' (i.e., poor quality of connection due to noise, etc.). To avoid the usage of bad quality carriers, once a carrier is first flagged either automatically or by the subscriber, calls will be routed to the second least cost carrier. After a predetermined number of flaggings within a finite time, the carrier will be suspended for a period of time. After a certain number of suspensions within a week, the carrier will be suspended for a week and the user notified accordingly.

In addition to collecting and processing carrier performance data using performance monitor 456, processor controller 440 may receive carrier performance data from data server 412 via the local computer 416. The data server may collect its own carrier performance data and make this data available to the local computer via downloading.

User interface 482 functions to provide setup screens for entering and updating subscriber supplied parameters. The data entered by the subscriber comprises the subscriber's name, address, organization, user ID, license size (i.e., number of line units) including serial numbers, monitored telephone numbers, e-mail address, main account number, primary carrier/OCP including start date, secondary carrier/OCPs numbered 1 through N including start date, initial long distance call volume, normal 1-800 call volume, normal credit card call volume, registration date, preferred telephone, NPA, country, contact telephone number, volume and term commitments, contact facsimile number. In addition, the user interface displays a call progress report which includes the following information: last used OCP, call destination (telephone number and text), cost and savings for the current and last call.

Reporting module 476 functions to generate the following reports: a savings report, a call accounting report and an unsuccessful call report. The savings report specifies the saving achieved by using the call management system compared to using the default carrier which is the primary inter-exchange carrier (PIC) (i.e., if the call management system was not used). The savings report shows the total saving last month, accumulated saving since the call management system was installed and the calls routed by carriers other than the

default (PIC) and the saving for each call for the last month. The call accounting report includes the details of successful calls. The calls are grouped by OCP and appear in calendar order. The call accounting report shows the called destination number, destination city, date, time of day, duration, cost and associated line unit. Various queries
5 may be made to view various call accounting information. The unsuccessful call report is typically used by a subscriber to inhibit usage of low performance and low quality carriers. This report enables monitoring of the grade of service among competitive carriers. The report includes the details of calls which have not been completed due to congestion or no detection of ring or busy tone after digits are dialed. Calls on this report are grouped by
10 carrier. Each entry in the report includes called destination number, destination city, data, time of day, call duration and line unit in use.

Line unit interface 488, coupled to processor 478, functions to provide the interface between the processor and the multiple line units 418 installed in the system. Both wired and wireless communication links are supported by the line unit interface. To support a
15 wired link, the line unit interface comprises a conventional RS-232 interface, well known in the art. For wireless links, the line unit interface comprises a suitable conventional wireless link such as RF or infrared, also well known in the art. Each line unit interface maintains a communications link with each of the line units in the system.

The carrier selection database is generated in the local computer by the line unit
20 database preparation module 480, downloaded to each line unit and stored in carrier selection database 462. The carrier selection module 448 in the line unit determines for each call, using the carrier selection database, the optimum route and provides to the dialer the necessary access dialing string prefix along with the number to be dialed. The input parameters to the line unit database preparer comprise the parameters in the table presented
25 above and include both the Deterministic and Statistical Parameters listed. In addition, the following parameters are used by the line unit database preparer in constructing the carrier selection table.

Additional Parameters Used To Construct Carrier Selection Database

1. anticipated call duration
 2. call duration statistical distribution
 3. volume accumulated from separate telephone lines that are combined into one account
 4. call volume accumulated for a volume discount (e.g., 1-800, credit card calls, cellular, etc.)
 5. taper (i.e., different price for different level of consumption)
 6. discounted countries predicted according to call history data (e.g., Sprint's 'Most')
 7. discounted area codes predicted according to call history data (e.g., Sprint's 'Most')
 8. discounted telephone numbers predicted according to call history data
-

Some calls are not modified by the line unit and are dialed as is. For example numbers with a non-legal NPA, unsupported country codes and NPA/NXXs for which no rate table exists (i.e., 1-800, 1-900, emergency services, collect calls, etc.).

- 5 As described above, the line unit determines the optimum route for each call dialed. Dialing strings are received by the dialing receiver and an optimum route is determined by the line unit and out dialed by the dialer. Once the carrier selection database is downloaded into the line unit, no further action on the part of the local computer is necessary for calls to be optimally routed. Given sufficient processing power and memory, the line unit could
- 10 determine the optimum route, taking into account all the various parameters listed in the tables above, for the call using the tariff database sent by the data server. This database comprises the raw tariff data organized by location, OCP and distance. However, a line unit capable of processing the raw tariff data, using processor's available today with a sufficiently large memory size, would not be cost effective. If less powerful but cost
- 15 effective processors are used, prohibitively large processing delays result. Thus, in order to reduce the processing overhead that must be performed by the line unit an abridged version of the tariff database is downloaded to the line unit, called the carrier selection database. This database is organized by rate steps originating from the subscribers location. A diagram illustrating the rate step zones centered around an arbitrary geographic location is
- 20 shown in Figure 20. Each ring 490 represents the border between two rate steps. Note that different jurisdictions (i.e., IntraLATA, Interstate, etc.) constitute a different ratestep. The area between two rings represent a zone having a constant tariff rate within the same jurisdiction. The rate steps are chosen so that each carrier's rate step is represented. Since not all carrier's have the same rate step organization, the rate steps used to construct the
- 25 carrier selection database are typically finer than those of any one carrier.

The database that is sent from the data server to the local computer comprises entries for each NPA/NXX in the country (using the United States as an example) and for each foreign country where the NPA is '011' and the NXX represents the country code. This amounts initially to over 100,000 entries. For each entry the tariff to every other NPA/NXX is listed. Line units comprising inexpensive processors and memories to reduce cost would generate unacceptable delays in determining the optimum route for each call. Thus, the number of entries in the database is significantly reduced, for a typical NPA/NXX, by organizing all destination NPA/NXXs by rate step. In some locations, entire NPAs or at least a large portion thereof are included within a single rate step, thus obviating the need to list each NXX separately. The space between each rate step ring 490 represents an area of equal tariff rate on a carrier basis. Each carrier sets their own tariff rate for each rate step.

International and overseas calls are handled in a similar fashion. Each country is assigned its own rate step in accordance with its country code. In this way international calls are handled similarly to domestic calls.

A pseudo code listing illustrating the logic flow of the process of constructing the carrier selection table in the local computer which is subsequently downloaded to the line units is presented below.

Generation of Carrier Selection Table

```

FOR each type of day {
  FOR each rate step {
5      get list of all relevant carrier OCPs
      IF there is a volume commitment or prepaid volume not yet met {
          give that carrier first priority in the carrier selection table
      }
      ELSE IF non-specially discounted number {
10         FOR each hour {
            FOR each OCP {
                1. calculate call price as a function of [rates,
                    minimum period, additional period, expected call
15                duration (function of rate step and TOD), call
                    duration distribution (function of rate step and TOD),
                    expected volume discount, term discount, personal
                    discount]
                2. arrange carrier OCPs in a descending selection
20                order
                3. insert into carrier selection table
            }
        }
      }
      ELSE IF specially discounted number {
25         FOR each hour {
            FOR each OCP {
                1. calculate call price as a function of [rates,
                    minimum period, additional period, expected call
30                duration (function of rate step and TOD), call
                    duration distribution (function of rate step and TOD),
                    expected volume discount, term discount, personal
                    discount, special discount]
                2. arrange carrier OCPs in a descending selection
35                order
                3. insert into carrier selection table
            }
        }
      }
40 }

```

As described above, the line unit database preparation module in the local computer constructs the carrier selection database. The database itself is organized first by type of day (e.g., weekday, weekend, holiday, etc.). For each type of day, the data is organized by rate step. For each rate step the cost for each OCP is calculated according to the hour of

the day. The factors that are utilized in determining the cost of each OCP is outlined in the pseudo code listed above. Once the cost is determined for each OCP, the OCPs are placed in the carrier selection database ordered by increasing cost.

Using this scheme, the processing overhead required by line unit on a call by call basis is greatly reduced. The process of determining the optimum route for the call, is reduced to a table look up operation which can be performed very quickly. The table lookup involves choosing the a suitable entry in the carrier selection database downloaded into the line unit. If the first entry in the table is not acceptable for some reason (e.g., it is on a 'bad' carrier list) the carrier next in line is picked. Calculations are not necessary and only another table look-up is required.

It is important to note that in addition, to the raw tariff data received from the data server, the line unit database preparation module also utilizes data contained in the personal database 486, call statistics database 485 and call accounting database 484 in constructing the carrier selection database.

A flow chart illustrating a method of real time call routing using the call management system of the present invention is shown in Figure 21. This process is performed by each of the line units in the course of processing a call made by a user. First, the digits dialed by the user are intercepted by the dialing receiver 446 (Figure 19) (step 500). It is then determined whether this is a call that is to processed (i.e., optimized) (step 502). As described above, certain calls are not processed (e.g., emergency services, operator, toll free, etc.). If the call is of the type that is not to be processed it is immediately dialed using the dialer 458 (step 504) and the process terminates.

If the call is to be processed, it is then determined whether the call is domestic or international (step 506). If it is an international call, the rate step is determined according to the country code (step 508). If it is a domestic call, the rate step is determined according to the NPA/NXX (step 510). A table look-up is then performed on the carrier selection database based on the rate step, day of week, time of day, whether or not the carrier is preferred and aggregate volume (step 514).

Once the carrier is selected, it is determined whether the carrier requires an authorization code (step 516). If not, the dialing prefix dialed is simply the '10' (or '101' for new carriers) plus the carrier's ID code (CIC) (step 526). Subsequently, the intercepted number is then dialed (step 528).

If a code is required, the carrier's access number is first dialed as in step 526 (step 518) and then, after a conformation tone is received (step 520); the authorization code is dialed (step 522). After another confirmation tone is received (step 524), the originally intercepted number is dialed (step 528).

- 5 After the intercepted number is dialed the line events (i.e., ringing, busy, etc.) are logged by the line unit. These event are optionally periodically transmitted to the local computer for post processing of call data. Each event is also individually time stamped before being processed by the local computer.

- Controller 440 (Figure 19) executes one or more processes within the line unit. A
10 call process is a real time event driven process that includes the following: line monitoring, digit collection and analysis, carrier selection and call logging. Line monitoring is active during all the phases of a call and includes the monitoring of all line units in the system. The multi-LU management module 472 (Figure 18) in the local computer handles the off-line communications. It downloads the carrier selection database to all line units and
15 uploads call accounting data from each line unit in order to accumulate volume and carrier usage data from each telephone line. The call accounting module 474, receives telephone line status information from each line unit, arranges the data according to line unit and receives the status of each line unit itself, thus obtaining information on all dialed digits and on call start and end information. The local computer maintains communications with
20 each line unit and periodically sends 'keep alive' messages to each line unit.

- The digit collection and analysis process in the line unit is evoked by the telephone set going off-hook. Once dialed, the call progress display in the local computer may dynamically update the following information for the user or subscriber: the dialed number, destination city, carrier's identity, call progress phase, call duration, call
25 accumulated dynamic cost and call accounting dynamic saving. The call logging process logs calls which have and have not been processed by the line unit, faulty calls in which no connection was established (i.e., no ring or busy tone, call was too short, congestion tone, call establishment time was too long, call flagged as bad by subscriber, etc.).

- In addition to a call process, the controller in the line unit executes time driven
30 processes which include volume calculation per carrier and the carrier quality and performance assessment process, discussed previously. In addition, the data uploaded to the local computer is used to determine when a new carrier selection database needs to be

generated. The volume calculation includes calculating the volume of each carrier's OCP on a monthly basis and computing an average. The calculated average volume is used to determine the expected volume per carrier and to recalculate the pointer to the volume discount entry for calculation of the carrier selection database. In addition, a process performed weekly calculates the expected volume according to the following formula:

$$\text{expected volume} = \frac{\text{accumulated volume}}{\text{percentage of the month passed}} \text{ (weighted with last months average)}$$

Calculating the expected volume helps to eliminate cases where a monthly peak or changes in the usage of a carrier will cause new volumes. If weekly expected volumes differ from the average monthly volume, the carrier selection database is updated and downloaded to the line units and the appropriate OCPs are updated accordingly. The performance monitor control process decides, on a periodic basis, whether to drop a particular carrier from use. The decision is based on data collected automatically and entered manually by the subscriber, as described previously. In addition, the expiration date of promotions are tracked on a daily basis within the local computer. The expiration data of each promotion is included in the OCP parameter data.

While the invention has been described with respect to a limited number of embodiments, it will be appreciated that many variations, modifications and other applications of the invention may be made.

CLAIMS

1. A method of determining an optimum telecommunication carrier from a group of telecommunication carriers for placing a telephone call dialed by a user, comprising the steps of:
 - 5 intercepting a string of dialing digits, representing said telephone call, dialed by said user;
 - determining said optimum telecommunication carrier for said telephone call utilizing said dialing digits; and
 - placing said telephone call using said optimum telecommunication carrier.
- 10 2. The method according to claim 1, wherein the step of determining an optimum telecommunication carrier comprises the step of choosing a carrier based on the least cost route for said telephone call.
3. The method according to claim 1, wherein the step of determining an optimum telecommunication carrier comprises the step of choosing a telecommunication carrier
- 15 within said group of telecommunication carriers based on performance and quality of connections made by said telecommunication carrier.
4. The method according to claim 1, wherein the step of determining an optimum telecommunication carrier comprises the step of choosing a telecommunication carrier within said group of telecommunication carriers based on said user's past calling history.
- 20 5. The method according to claim 1, further comprising the step of appending an appropriate access and/or authorization code to said dialing string.
6. The method according to claim 1, further comprising the step of updating appropriate internal tables to take into account said telephone call dialed by said user.
7. A telecommunication call management system comprising:
 - 25 at least one telephone dialing unit for dialing a telephone number to place a telephone call;

- at least one least cost router, each least cost router having a corresponding routing database of tariffs of telephone service providers, wherein each said least cost router determines, from information in its corresponding said routing database, which telephone service provider to utilize to execute said telephone call;
- a database updating unit electronically updating tariff information into each of said routing databases after updated tariff information is entered therein; and means for generating call history data and statistics of phone calls, utilizing said call history data and said statistics to generate expected call durations, volume predictions and statistical distributions therefrom, utilizing said expected call durations and its effect on call pricing to determine which said telephone service provider to utilize to execute said telephone call.
8. The system according to claim 7, wherein said database updating unit comprises means for directly connecting to said at least one least cost router.
9. The system according to claim 7, wherein said database updating unit comprises means for providing said updated tariff information to a user who subsequently provides said updated tariff information to said telecommunication call management system.
10. The system according to claim 7, wherein said telephone service providers are selected from the group of: local exchange carriers, inter-exchange carriers, intra-exchange carriers, international carriers, fax store and forward providers, callback providers, organization owned networks.
11. The system according to claim 7, wherein said at least one telephone dialing unit is formed as part of any one of the following: a Central Office line, Centrex exchange (CTX), private branch exchange (PBX), trunk line, cellular telephone, personal computer, private branch exchange extension.
12. A telecommunication call management system comprising:
a user interface unit for indicating a telephone number to be dialed;
a dialing unit for dialing said telephone number so as to initiate a telephone call;
and

a least cost router, having a corresponding routing database of tariffs of telephone service providers, wherein said least cost router determines, from information in its routing database, which telephone service provider or providers to utilize to execute said telephone call.

- 5 13. The system according to claim 12, further comprising means for generating call history data and statistics of phone calls, utilizing said call history data and said statistics to generate expected call durations therefrom, utilizing said expected call durations and an associated statistical distribution and its effect on call pricing to determine which said telephone service provider to utilize to execute said telephone call.
- 10 14. The system according to claim 12, further comprising a database updating unit which electronically updates tariff information into said routing database shortly after updated tariff information is entered therein.
- 15 15. The system according to claim 12, wherein said telephone service providers are selected from the group of: central switching offices, inter-exchange carriers, intra-exchange carriers, international carriers, fax-store-and-forward providers, call-back providers.
16. A call management system for updating a plurality of remote tariff databases storing therein tariffs of telephone service providers, said system comprising:
- 20 database means for storing tariff information;
- means for receiving changes to said tariff information thereby to create updated tariff information;
- means for electronically updating said tariff information into said plurality of remote tariff databases shortly after said updated tariff information is entered therein.
- 25 17. The system according to claim 16, wherein said database means for storing location dependent data such as exchange coordinates for determining distance between exchanges and related call jurisdictions, lists of exchanges considered a local call for each exchange, available carriers and access method for each telephone exchange.

18. The system according to claim 16, wherein said means for electronically updating comprises means for emulating the interface of a remote tariff database thereby to update said remote tariff database.
19. The system according to claim 16, wherein said database updating unit comprises means for directly connecting to said plurality of remote tariff databases.
20. The system according to claim 16, wherein said database updating unit comprises means for providing said updated tariff information to a user who subsequently provides said updated tariff information to said plurality of remote tariff databases.
21. A telecommunication call management system for determining an optimum route for a telephone call made by a subscriber, said telephone call routed through one of N local exchange carriers coupled to said system via K telephone lines, each said local exchange carrier coupled to one of M long distance carriers, the system comprising:
- a tariff data server for managing a database containing tariff and geographical related information on local and long distance carriers, local exchange, telephone exchange location related data and subscribers;
 - a first communication link coupling said tariff data server to a local client computer;
 - said local client computer for maintaining a client database containing tariff and personal information, said local client computer for determining said optimum route;
 - at least one line unit coupled to a telephone set, said N local exchange carriers and said local client computer, said at least one line unit for intercepting digits dialed by said subscriber, monitoring one of said K telephone lines, receiving a dialing string from said local client computer corresponding to said optimum route and transmitting said dialing string onto said one of said K telephone lines; and
 - a second communication link coupling said local client computer to said at least one line unit.
22. The system according to claim 21, wherein said tariff data server comprises:

- a processor for controlling the operation of said tariff data server;
a server database interface coupled to said processor, said server database interface
for fulfilling database requests issued by said processor;
a server database coupled to said server database interface, said server database
5 containing tariff and geographical related information on local and long
distance carriers; and
a client communications module coupled to said processor and to said first
communication link, said client communications module for managing
communications between said processor and said local client computer.
- 10 23. The system according to claim 22, wherein said tariff data system comprises:
a report generation system coupled to said processor, said report generation system
for producing reports from data collected by said system both automatically
and manually; and
a subscriber interface coupled to said processor, said subscriber interface for
15 managing the collection and maintenance of subscriber supplied personal
data.
24. The system according to claim 22, wherein said server database comprises:
an optional calling plan database coupled to said server database interface;
a distance/local exchange database coupled to said server database interface;
20 a carrier access database coupled to said server database interface;
a subscriber database coupled to said server database interface; and
a client database coupled to said server database interface.
25. The system according to claim 21, wherein said first communication link comprises
a telephone line.
- 25 26. The system according to claim 21, wherein said first communication link comprises
the Internet.
27. The system according to claim 21, wherein said local client computer comprises:
a processor for managing the operation of said local client computer;

- a client database update module coupled to said processor, said client database update module receiving and processing database downloads from said tariff data server;
- 5 a line unit interface coupled to said processor, said line unit interface for coupling said processor to said at least one line unit;
- a least cost router coupled to said processor, said least cost router for determining the optimum route for a call placed by said subscriber, said least cost router returning a carrier dialing string to route said call accordingly;
- 10 a user interface coupled to said processor, said user interface for providing an interface between said processor and said subscriber;
- a client database holding personal related information;
- a client database interface coupled to said processor, said client database interface providing an interface between said processor and said client database;
- 15 a call accounting module coupled to said processor, said call accounting system logging calls placed by said subscriber and determining subscriber call characteristics; and
- 20 a carrier quality and performance monitoring module coupled to said processor, said carrier quality and performance monitoring module for managing the selection of said long distance carriers based on quality and performance of their connections.
28. The system according to claim 27, further comprising a reporting module coupled to said processor.
29. The system according to claim 21, wherein said second communication link comprises an RS-232 link coupling said local client computer to said at least one line unit.
- 25 30. The system according to claim 21, wherein said second communication link comprises a wireless radio frequency link coupling said local client computer to said at least one line unit.

31. The system according to claim 21, wherein said second communication link comprises a wireless infrared link coupling said local client computer to said at least one line unit.
32. The system according to claim 21, wherein said second communication link
5 comprises a Universal Serial Bus link coupling said local client computer to said at least one line unit.
33. The system according to claim 21, wherein said at least one line unit comprises:
a processor for controlling the operation of said line unit;
a dialing receiver coupled to said processor, said dialing receiver intercepting digits
10 dialed by said subscriber and transferring said digits to said processor;
a dialer coupled to said processor, said dialer receiving a dialing string from said processor and causing said dialing string to be dialed onto one of said K telephone lines;
a local client computer interface coupled to said processor, said local client
15 computer interface providing the interface between said processor and said local client computer;
a pass through coupled to said processor, said pass through having a first and second state, both said first and said second states controlled by said processor, said first state blocking said telephone set from said one of said K
20 telephone lines, said second state coupling said telephone set to said one of said K telephone lines;
a line monitor coupled to said processor, said line monitor detecting and interpreting signals occurring on said one of said K telephone lines; and
a local exchange selector coupled to said pulse/tone dialer, said processor and said
25 N local exchange carriers via said K telephone lines, said local exchange carrier coupling said pulse/tone dialer to one of said N local exchange carriers in accordance with a control signal produced by said processor.
34. The system according to claim 33, wherein said dialing receiver detects and decodes pulse and dual tone multiple frequency tones.

35. The system according to claim 33, wherein said dialing receiver detects and decodes Integrated Digital Network Services (ISDN) signaling information.

36. A telecommunication call management system for determining an optimum route for telephone calls made by users of a private branch exchange (PBX), each of said
5 telephone calls routed through one of N local exchange carriers coupled to said system via K trunk lines, each said local exchange carrier coupled to one of M long distance carriers, the system comprising:

- a tariff data server for managing a database containing tariff and geographical related information on local and long distance carriers;
- 10 a first communication link coupling said tariff data server to a local client computer;
- said local client computer for maintaining a client database containing personal related information, said local client computer for determining said optimum route;
- 15 at least one line unit coupled between a user's telephone set and one of said K trunk lines, said at least one line unit coupled to said local client computer, said at least one line unit for intercepting digits outputted by said PBX, monitoring said one of said K trunk lines and receiving a dialing string from said local client computer corresponding to said optimum route and transmitting said
20 dialing string to said one of said K trunk lines; and
- a second communication link coupling said local client computer to said at least one line unit.

37. The system according to claim 36, wherein said tariff data server comprises:

- a processor for controlling the operation of said tariff data server;
- 25 a server database interface coupled to said processor, said server database interface for fulfilling database requests issued by said processor;
- a server database coupled to said server database interface, said server database containing tariff related information on local and long distance carriers; and

a client communications module coupled to said processor and to said first communication link, said client communications module for managing communications between said processor and said local client computer.

38. The system according to claim 37, wherein said tariff data system comprises:
5 a report generation system coupled to said processor, said report generation system for producing reports from data collected by said system both automatically and manually; and
a subscriber interface coupled to said processor, said subscriber interface for managing the collection and maintenance of subscriber supplied data.
- 10 39. The system according to claim 37, wherein said server database comprises:
an optional calling plan database coupled to said server database interface;
a distance/local exchange database coupled to said server database interface;
an access database coupled to said server database interface;
a subscriber database coupled to said server database interface; and
15 a client database coupled to said server database interface.
40. The system according to claim 36, wherein said first communication link comprises a telephone line.
41. The system according to claim 36, wherein said first communication link comprises the Internet.
- 20 42. The system according to claim 36, wherein said local client computer comprises:
a processor for managing the operation of said local client computer;
a client database update module coupled to said processor, said client database update module receiving and processing database downloads from said tariff data server;
25 a line unit interface coupled to said processor, said line unit interface for coupling said processor to said at least one line unit;
a least cost router coupled to said processor, said least cost router for determining the optimum route for a call placed by said subscriber, said least cost router returning a carrier dialing string to route said call accordingly;

- a user interface coupled to said processor, said user interface for providing an interface between said processor and said subscriber;
- a client database holding personal related data;
- a client database interface coupled to said processor, said client database interface providing an interface between said processor and said client database;
- a call accounting module coupled to said processor, said call accounting system logging calls placed by said subscriber and determining subscriber call characteristics; and
- a carrier performance monitoring module coupled to said processor, said carrier performance monitoring module for managing the selection of said long distance carriers based on the quality and performance of their connections.
43. The system according to claim 42, further comprising a reporting module coupled to said processor.
44. The system according to claim 36, wherein said second communication link comprises an RS-232 link coupling said local client computer to said at least one line unit.
45. The system according to claim 36, wherein said second communication link comprises a wireless radio frequency link coupling said local client computer to said at least one line unit.
46. The system according to claim 36, wherein said second communication link comprises a wireless infrared link coupling said local client computer to said at least one line unit.
47. The system according to claim 36, wherein said second communication link comprises a Universal Serial Bus link coupling said local client computer to said at least one line unit.
48. The system of claim 36, wherein said at least one line unit comprises:
- a processor for controlling the operation of said line unit;
 - a dialing receiver coupled to said processor, said dialing receiver intercepting digits dialed by said subscriber and transferring said digits to said processor;

- a dialer coupled to said processor, said dialer receiving a dialing string from said processor and causing said dialing string to be dialed onto one of said K trunk lines;
- 5 a local client computer interface coupled to said processor, said local client computer interface providing the interface between said processor and said local client computer;
- 10 a pass through coupled to said processor, said pass through having a first and second state, both said first and said second states controlled by said processor, said first state blocking said telephone set from said one of said K trunk lines, said second state coupling said telephone set to said one of said K trunk lines;
- a line monitor coupled to said processor, said line monitor detecting and interpreting signals occurring on said one of said K trunk lines; and
- 15 a local exchange selector coupled to said pulse/tone dialer, said processor and said N local exchange carriers via said K trunk lines, said local exchange carrier coupling said pulse/tone dialer to one of said N local exchange carriers in accordance with a control signal produced by said processor.

49. The system according to claim 48, wherein said dialing receiver detects and decodes pulse and dual tone multiple frequency tones.

20 50. The system according to claim 48, wherein said dialing receiver detects and decodes Integrated Digital Network Services (ISDN) signaling information.

51. A telecommunication call management system for determining an optimum telecommunication carrier for a telephone call made by a subscriber, said telephone call routed through one of N local exchange carriers coupled to said system via K telephone
25 lines, each said local exchange carrier coupled to one of M long distance carriers, the system comprising:

- a data server for managing a database containing tariff and geographical related information on local and long distance carriers, local exchange, telephone exchange location related data and subscribers;
- 30 a first communication link coupling said data server to a local computer;

- said local computer for generating a carrier selection database from selected deterministic and statistical parameters;
- at least one line unit coupled to a telephone set, said N local exchange carriers and said local client computer, said at least one line unit for intercepting a call dialed by said subscriber, monitoring one of said K telephone lines, choosing said optimum carrier from said carrier selection database and placing said call utilizing said optimum carrier and one of said N local exchange carriers; and
- a second communication link coupling said local computer to said at least one line unit.
52. The system according to claim 51, wherein said data server comprises:
- a processor for controlling the operation of said data server;
 - a server database interface coupled to said processor, said server database interface for fulfilling database requests issued by said processor;
 - a server database coupled to said server database interface, said server database containing tariff and geographical related information on local and long distance carriers; and
 - a client communications module coupled to said processor and to said first communication link, said client communications module for managing communications between said processor and said local computer.
53. The system according to claim 51, wherein said first communication link comprises a telephone line.
54. The system according to claim 51, wherein said first communication link comprises the Internet.
55. The system according to claim 51, wherein said local computer comprises:
- a processor for managing the operation of said local computer;
 - a data server interface coupled to said processor, said data server interface for interfacing with said data server through said first communication link;

- 5 a line unit database preparation module coupled to said processor, said line unit database preparation module determining, a priori, optimum carriers for calls placed by said subscriber from said subscriber's location to almost all possible destinations, said line unit database preparation module utilizing said optimum carriers in constructing said carrier selection database;
- a line unit interface coupled to said processor, said line unit interface for coupling said processor to said at least one line unit;
- a user interface coupled to said processor, said user interface for providing an interface between said processor and said subscriber;
- 10 a personal data database holding data relevant to said subscriber's location and calling preferences;
- a call accounting module for processing call data uploaded from said at least one line unit; and
- 15 a multi-LU management module for managing at least one line unit coupled to said local computer.
56. The system according to claim 55, further comprising a reporting module coupled to said processor.
57. The system according to claim 51, wherein said second communication link comprises an RS-232 link coupling said local computer to said at least one line unit.
- 20 58. The system according to claim 51, wherein said second communication link comprises a wireless radio frequency link coupling said local computer to said at least one line unit.
59. The system according to claim 51, wherein said second communication link comprises a wireless infrared link coupling said local computer to said at least one line unit.
- 25 60. The system according to claim 51, wherein said second communication link comprises a Universal Serial Bus link coupling said local computer to said at least one line unit.

61. The system according to claim 51, wherein said at least one line unit comprises:
a controller for controlling the operation of said line unit;
a dialing receiver coupled to said controller, said dialing receiver intercepting digits
dialed by said subscriber;
5 a dialer coupled to said controller, said dialer receiving a dialing string from said
controller and causing said dialing string to be dialed onto one of said K
telephone lines;
a local computer interface coupled to said controller, said local computer interface
providing the interface between said controller and said local computer;
10 a pass through coupled to said processor, said pass through having a first and
second state, both said first and said second states controlled by said
controller, said first state blocking said telephone set from said one of said
K telephone lines, said second state coupling said telephone set to said one
of said K telephone lines;
15 a line monitor coupled to said controller, said line monitor detecting and
interpreting signals occurring on said one of said K telephone lines;
a local exchange selector coupled to said dialer, said controller and said N local
exchange carriers via said K telephone lines, said local exchange selector
coupling said dialer to one of said N local exchange carriers under the
20 control of said controller; and
a carrier selection database comprising tariff information for enabling said at least
one line unit to determine said optimum carrier for a telephone call.
62. The system according to claim 61, wherein said dialing receiver detects and
decodes pulse and dual tone multiple frequency tones.
- 25 63. The system according to claim 61, wherein said dialing receiver detects and
decodes Integrated Digital Network Services (ISDN) signaling information.
64. The system according to claim 51, wherein said at least one line unit further
comprises:

a call history logging module coupled to said controller, said call history logging module logging calls placed by said subscriber and determining subscriber call characteristics; and

a performance monitoring module coupled to said controller, said performance monitoring module for managing the selection of said long distance carriers based on quality and performance of their connections; and

a volume accumulator module coupled to said controller, said volume accumulator generating call volume data for use in determining said optimum carrier.

65. A telecommunication call management system for determining an optimum telecommunication carrier for a telephone call made by a subscriber, said telephone call routed through one of N local exchange carriers coupled to said system via K telephone lines, each said local exchange carrier coupled to one of M long distance carriers, the system comprising:

a data server for managing a database containing tariff and geographical related information on local and long distance carriers, local exchange, telephone exchange location related data and subscribers and for generating a carrier selection database from selected deterministic and statistical parameters;

at least one line unit coupled to a telephone set, said N local exchange carriers and said local client computer, said at least one line unit for intercepting a call dialed by said subscriber, monitoring one of said K telephone lines, choosing said optimum carrier from said carrier selection database and placing said call utilizing said optimum carrier and one of said N local exchange carriers; and

a communication link coupling said data server to said at least one line unit.

66. The system according to claim 65, wherein said data server comprises:

a processor for controlling the operation of said data server;

a server database interface coupled to said processor, said server database interface for fulfilling database requests issued by said processor;

a server database coupled to said server database interface, said server database containing tariff related information on local and long distance carriers;

- 5 a client communications module coupled to said processor and to said first communication link, said client communications module for managing communications between said processor and said at least one line unit;
- a call accounting module for processing call data uploaded from said at least one line unit;
- a personal data database holding data relevant to said subscriber's location and calling preferences; and
- 10 a line unit database preparation module coupled to said processor, said line unit database preparation module determining, a priori, optimum carriers for calls placed by said subscriber from said subscriber's location to almost all possible destinations, said line unit database preparation module utilizing said optimum carriers in constructing said carrier selection database.

67. The system according to claim 65, wherein said communication link comprises a telephone line.
- 15 68. The system according to claim 65, wherein said communication link comprises the Internet.
69. The system according to claim 66, further comprising a reporting module coupled to said processor.
- 20 70. The system according to claim 65, wherein said at least one line unit comprises:
- a controller for controlling the operation of said line unit;
- a dialing receiver coupled to said controller, said dialing receiver intercepting digits dialed by said subscriber;
- a dialer coupled to said controller, said dialer receiving a dialing string from said controller and causing said dialing string to be dialed onto one of said K telephone lines;
- 25 a data server interface coupled to said controller, said data server interface for interfacing with said data server through said communication link;
- a pass through coupled to said processor, said pass through having a first and second state, both said first and said second states controlled by said

controller, said first state blocking said telephone set from said one of said K telephone lines, said second state coupling said telephone set to said one of said K telephone lines;

5 a line monitor coupled to said controller, said line monitor detecting and interpreting signals occurring on said one of said K telephone lines;

a local exchange selector coupled to said dialer, said controller and said N local exchange carriers via said K telephone lines, said local exchange selector coupling said dialer to one of said N local exchange carriers under the control of said controller; and

10 a carrier selection database comprising carrier selection information for enabling said at least one line unit to determine said optimum carrier for a telephone call.

71. The system according to claim 70, wherein said dialing receiver detects and decodes pulse and dual tone multiple frequency tones.

15 72. The system according to claim 70, wherein said dialing receiver detects and decodes Integrated Digital Network Services (ISDN) signaling information.

73. The system according to claim 65, wherein said at least one line unit further comprises:

20 a call history logging module coupled to said controller, said call history logging module logging calls placed by said subscriber and determining subscriber call characteristics; and

a performance monitoring module coupled to said controller, said performance monitoring module for managing the selection of said long distance carriers based on quality and performance of their connections; and

25 a volume accumulator module coupled to said controller, said volume accumulator generating call volume data for use in determining said optimum carrier by said data server.

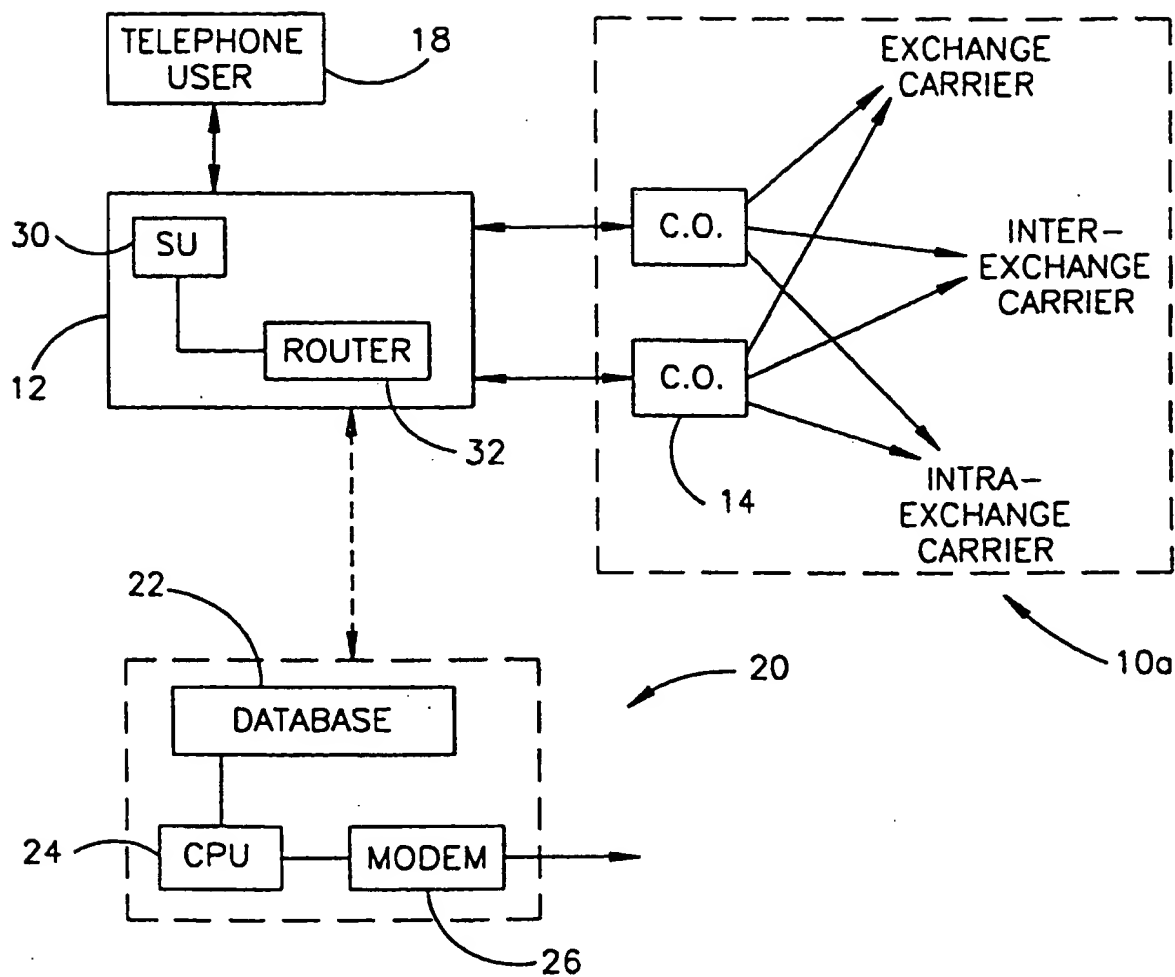
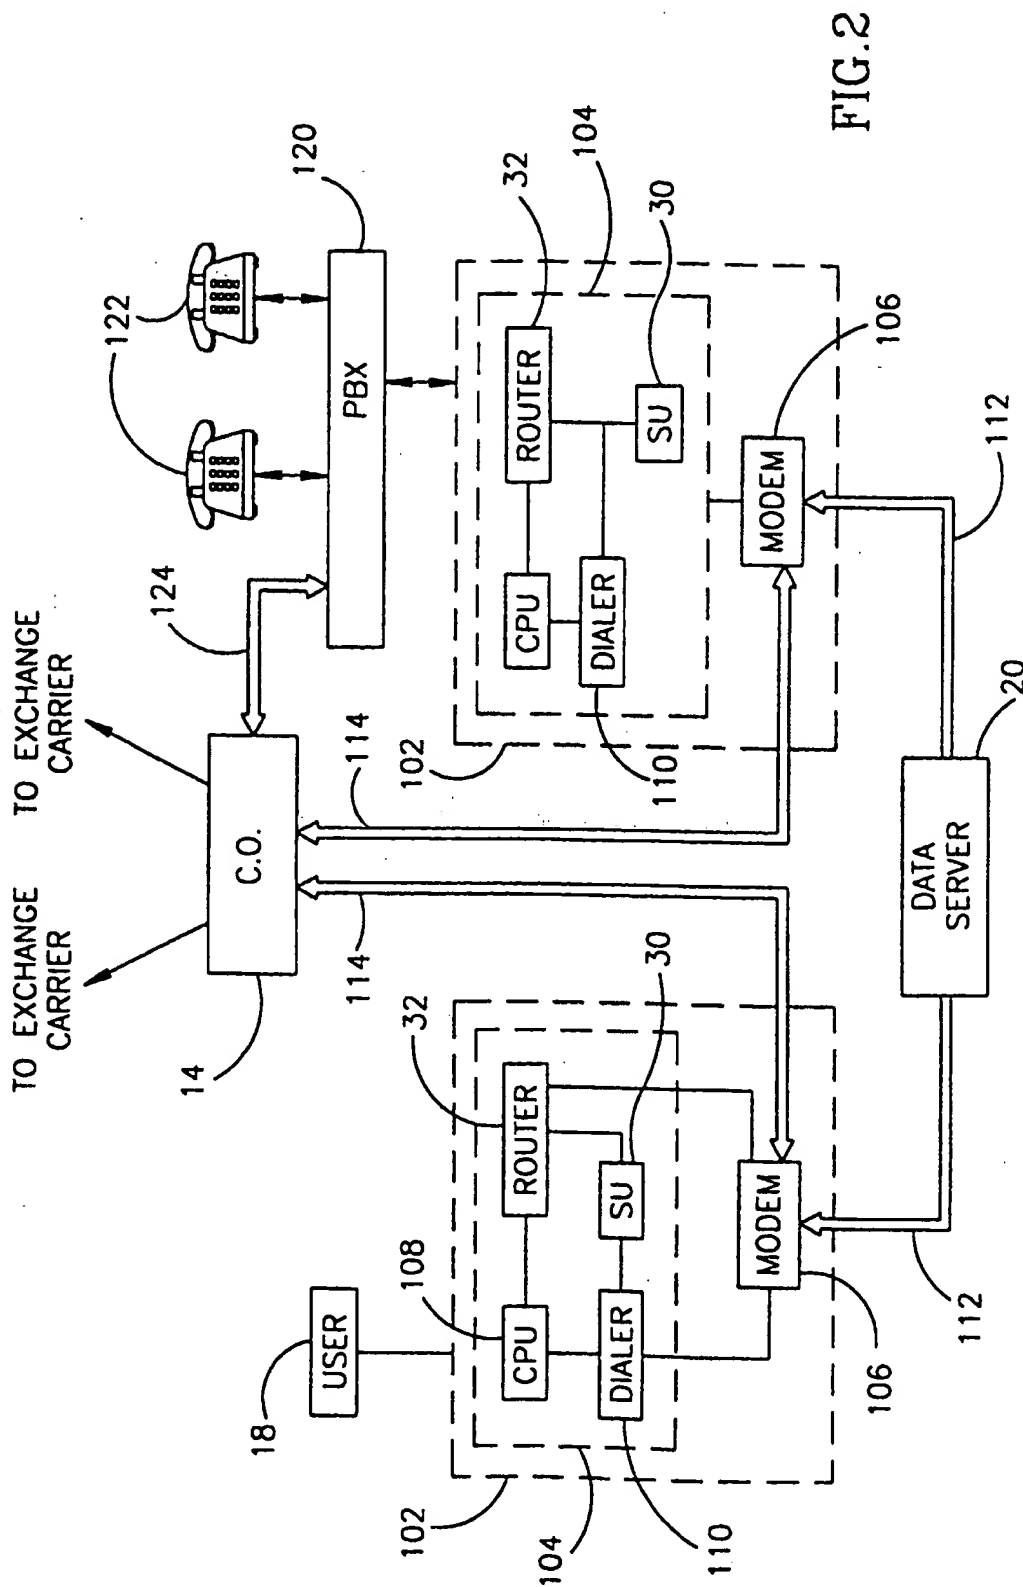


FIG. 1



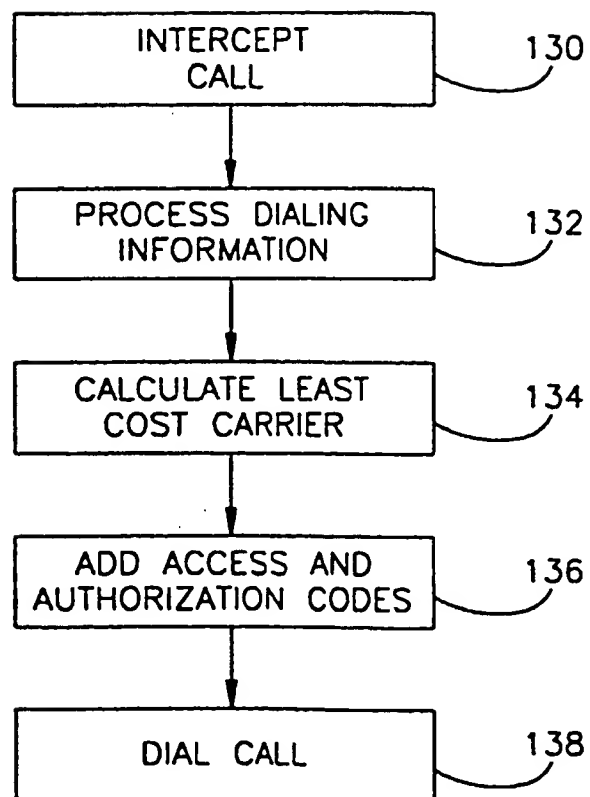
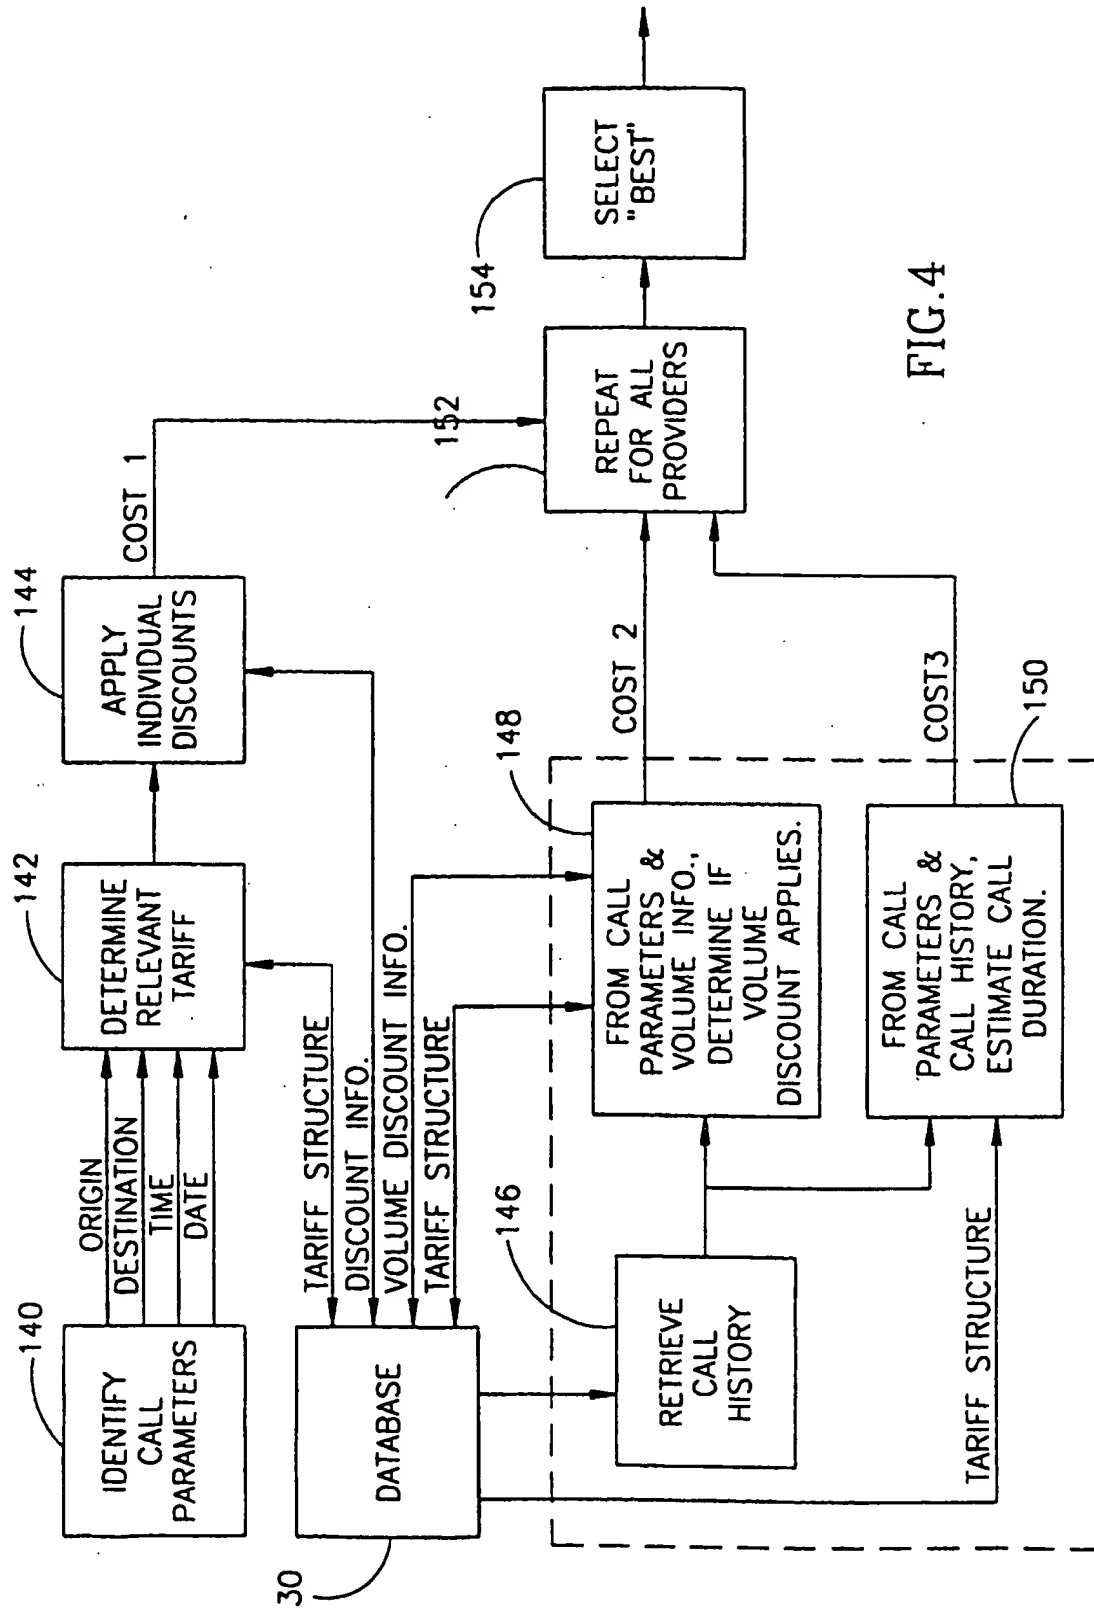


FIG.3



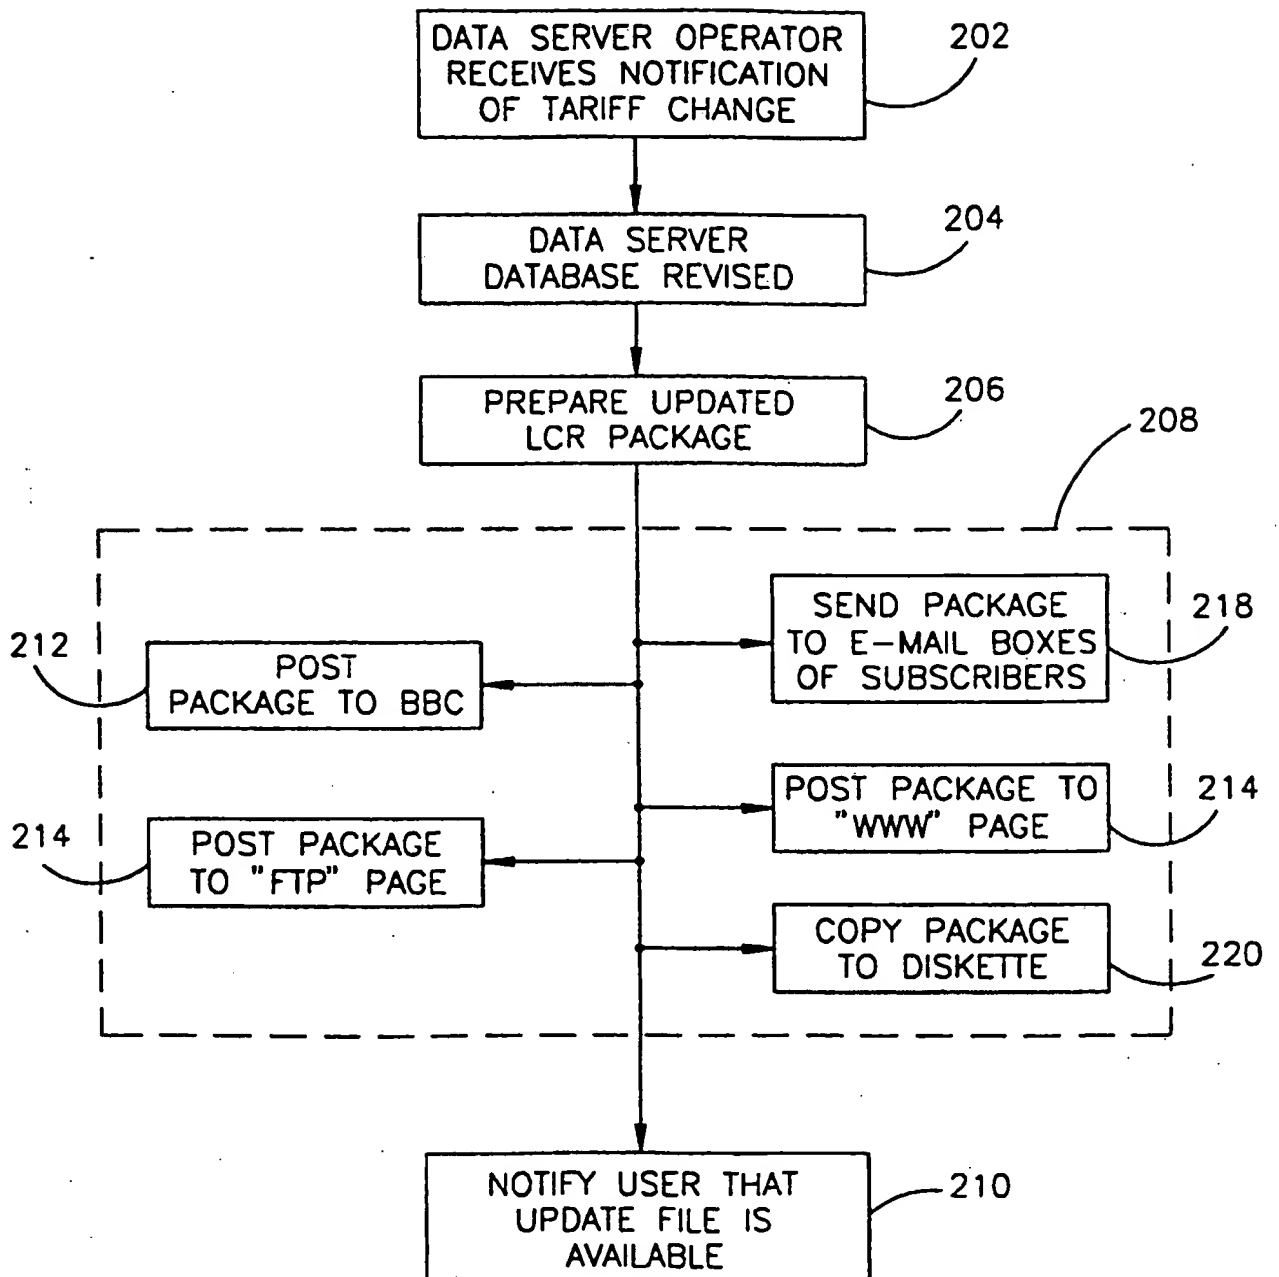


FIG.5

FIG. 6

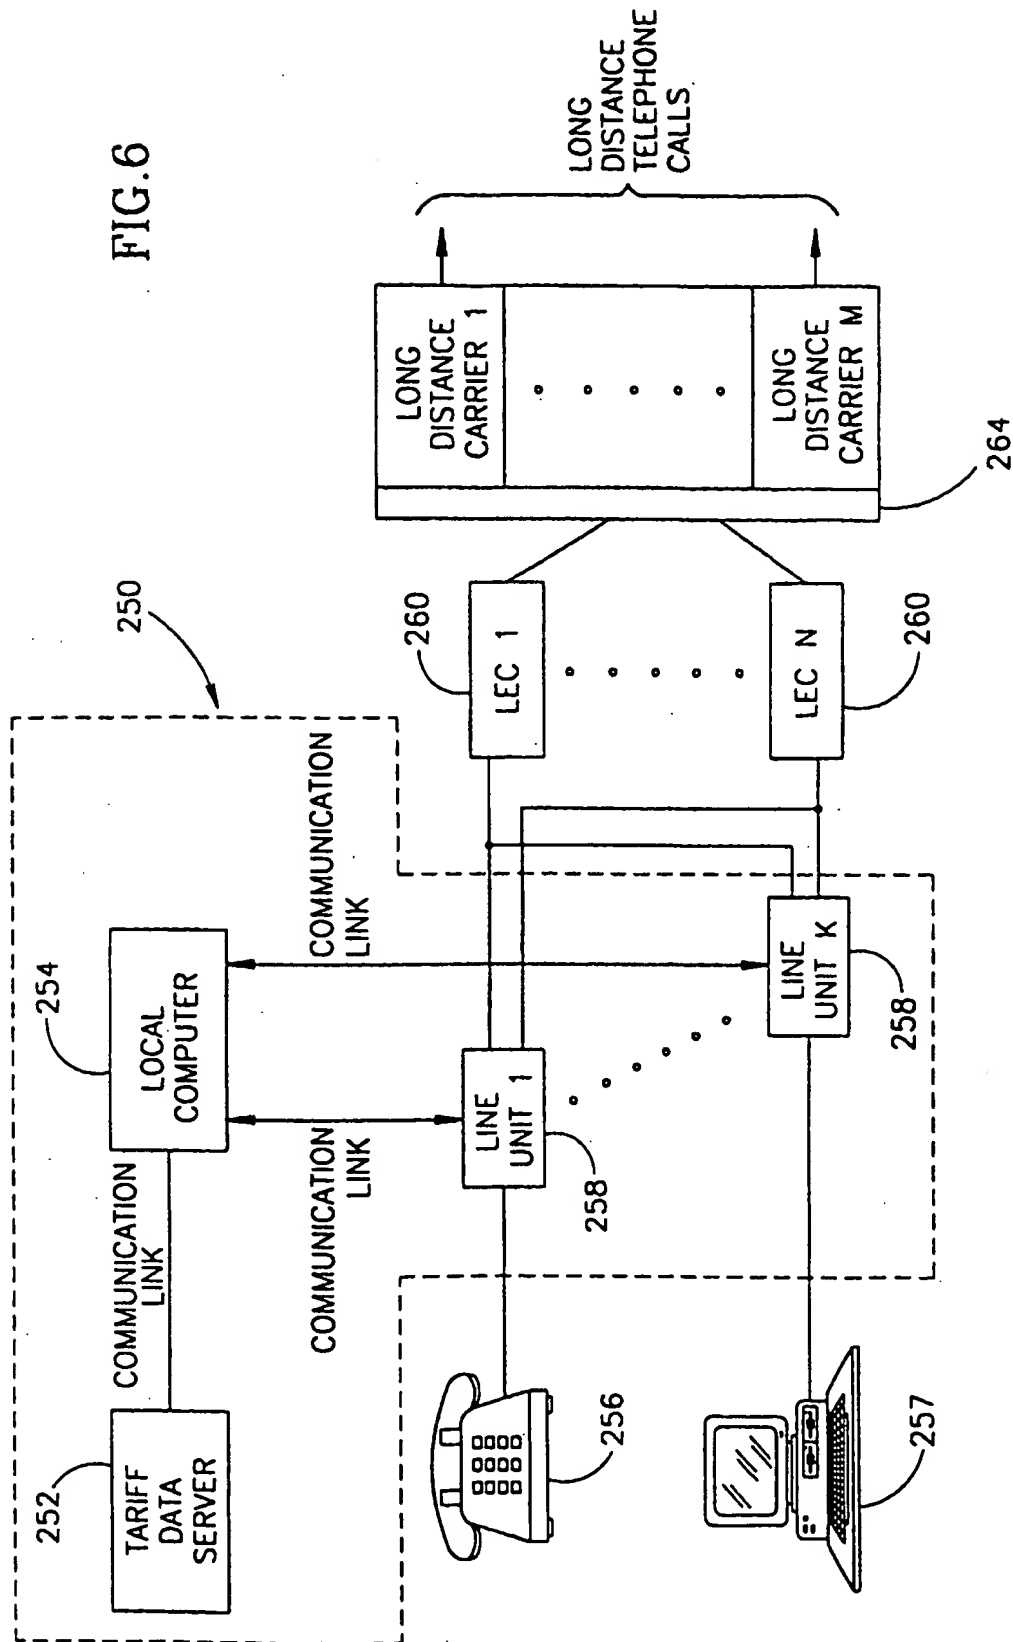


FIG. 7

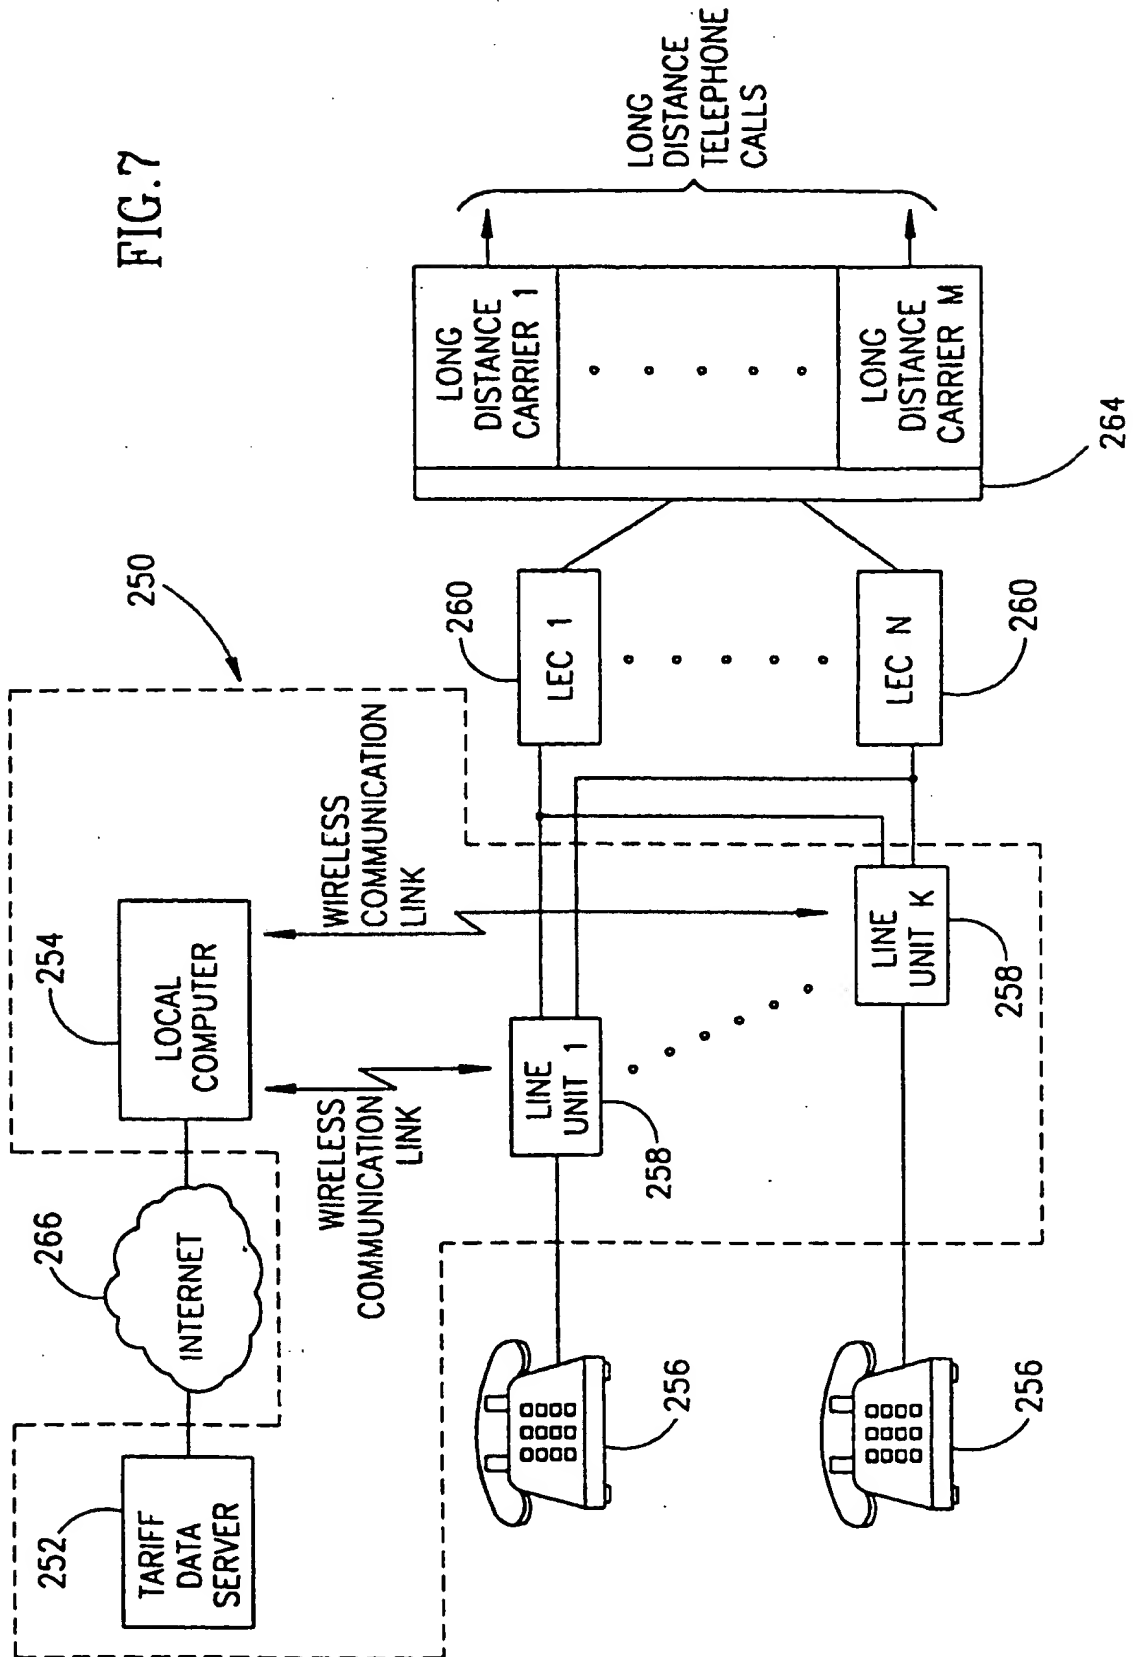
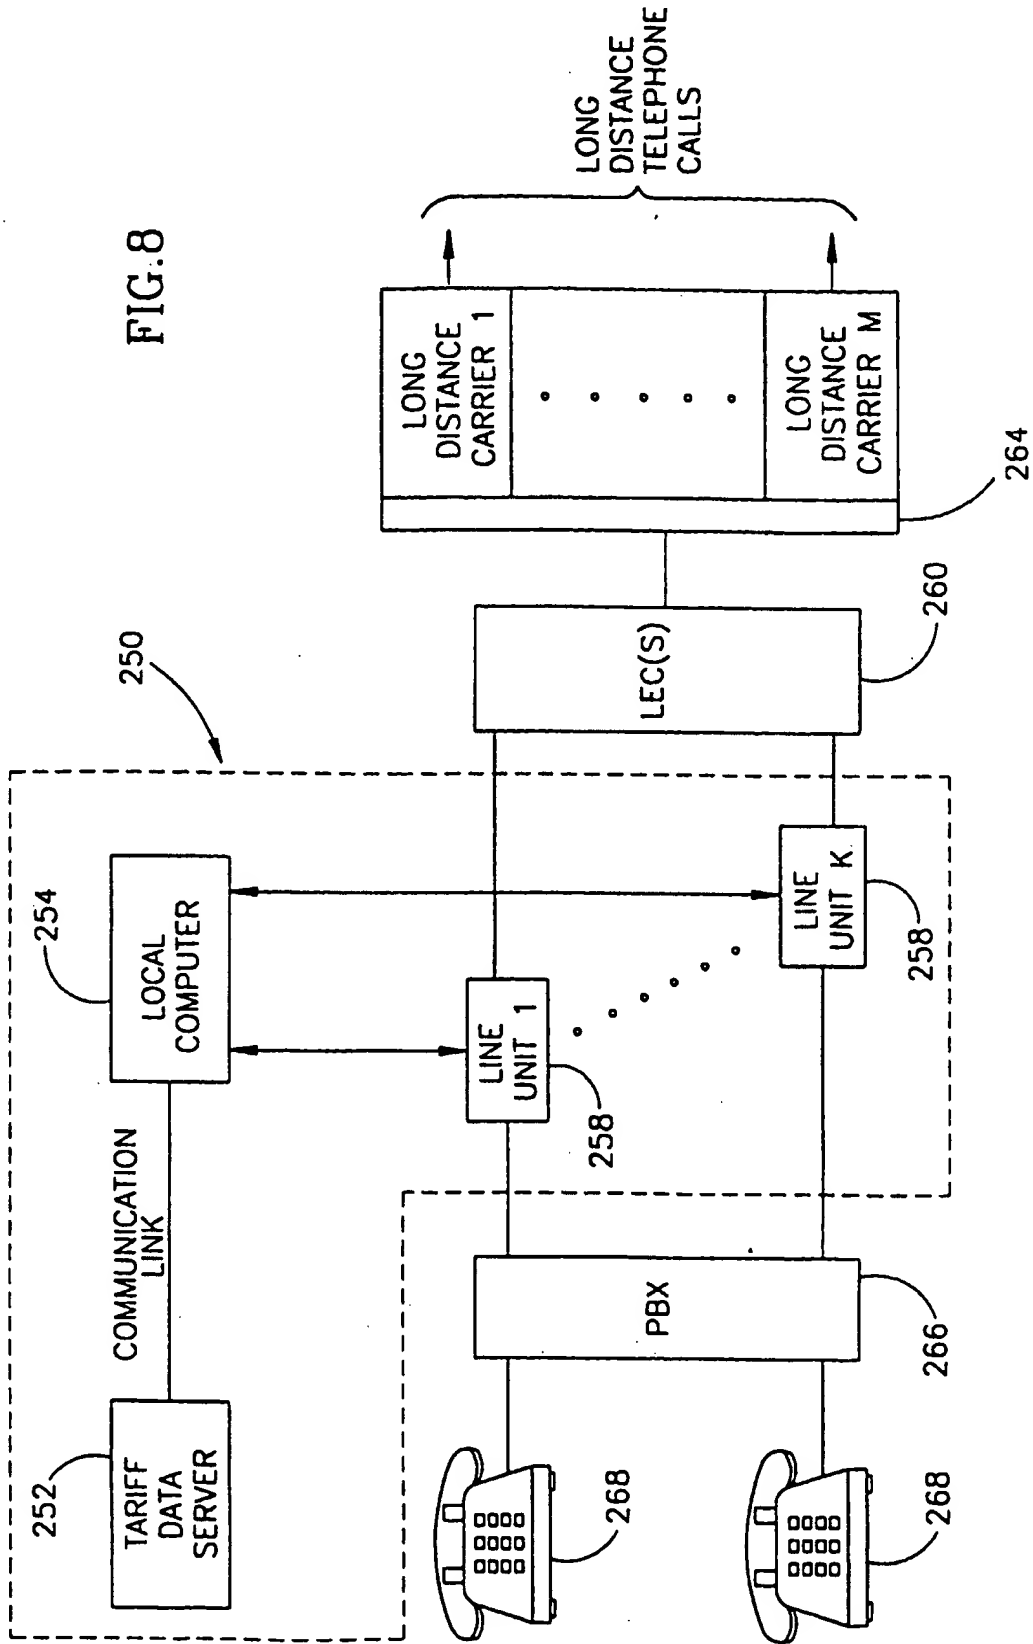


FIG. 8



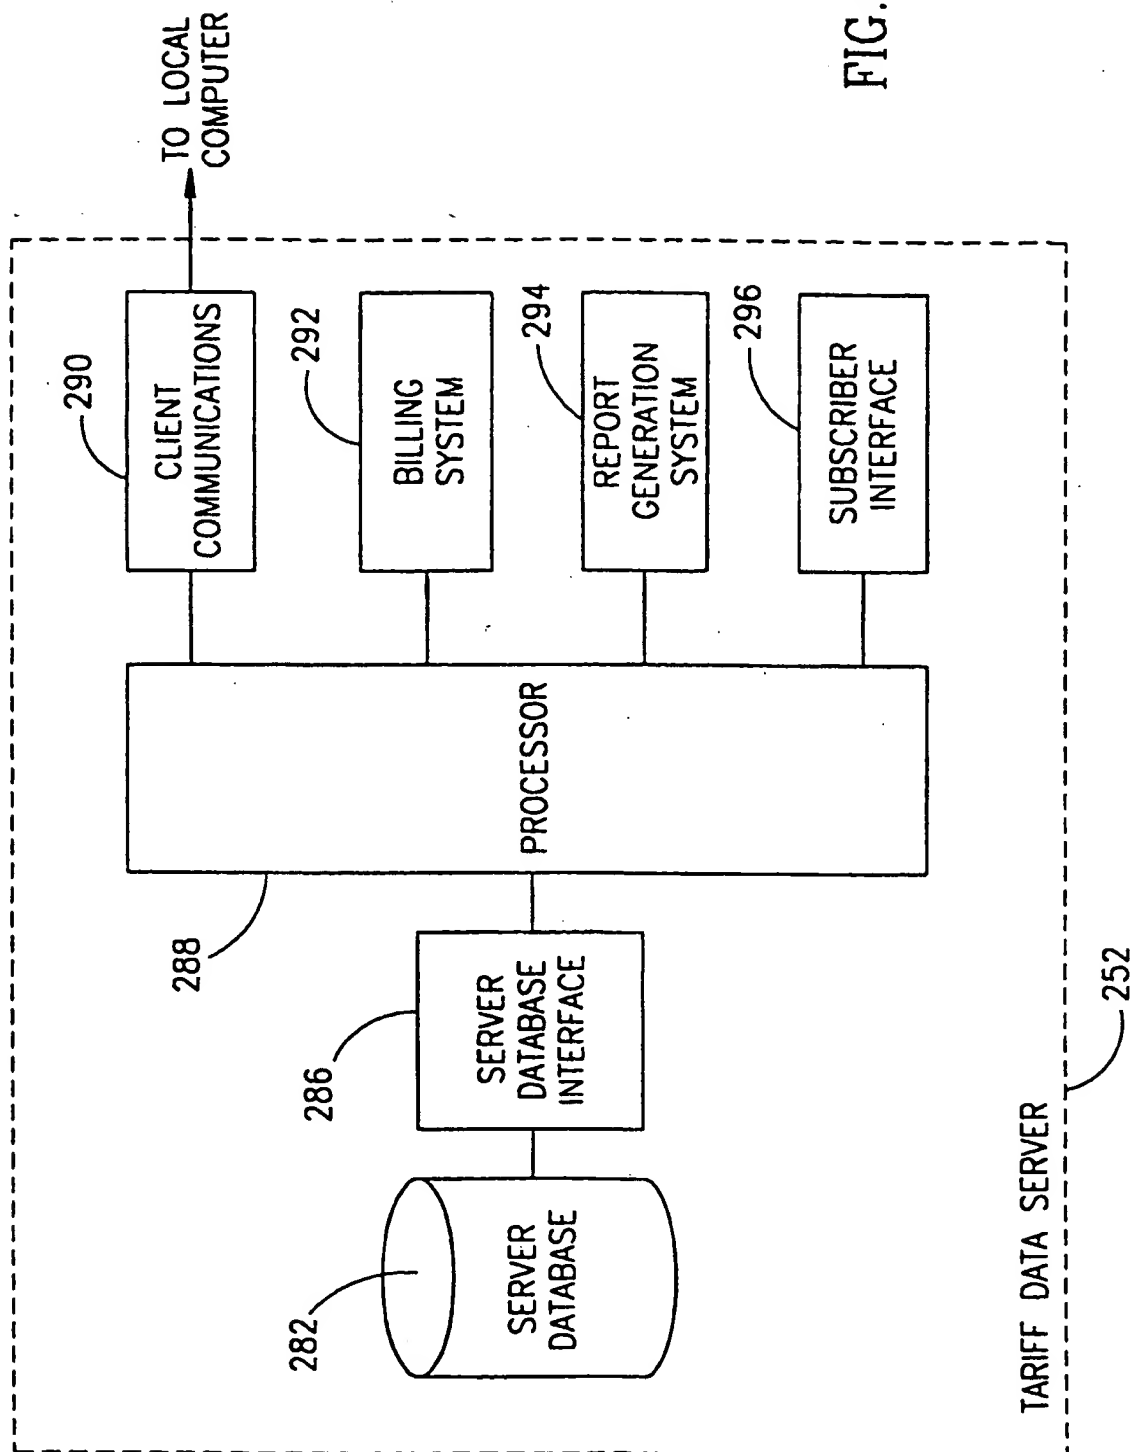


FIG.9

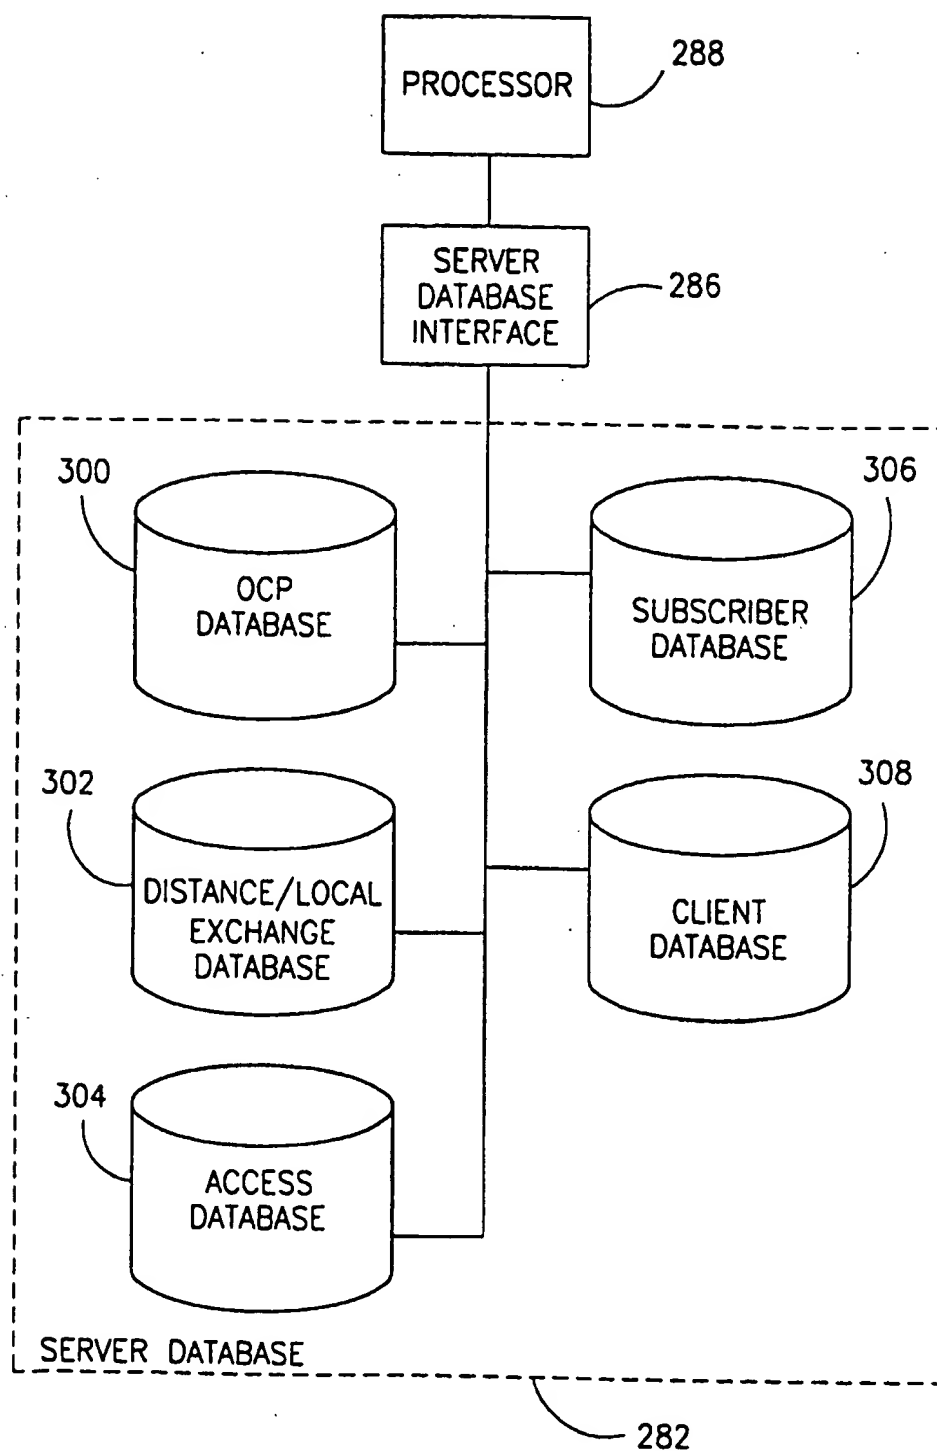
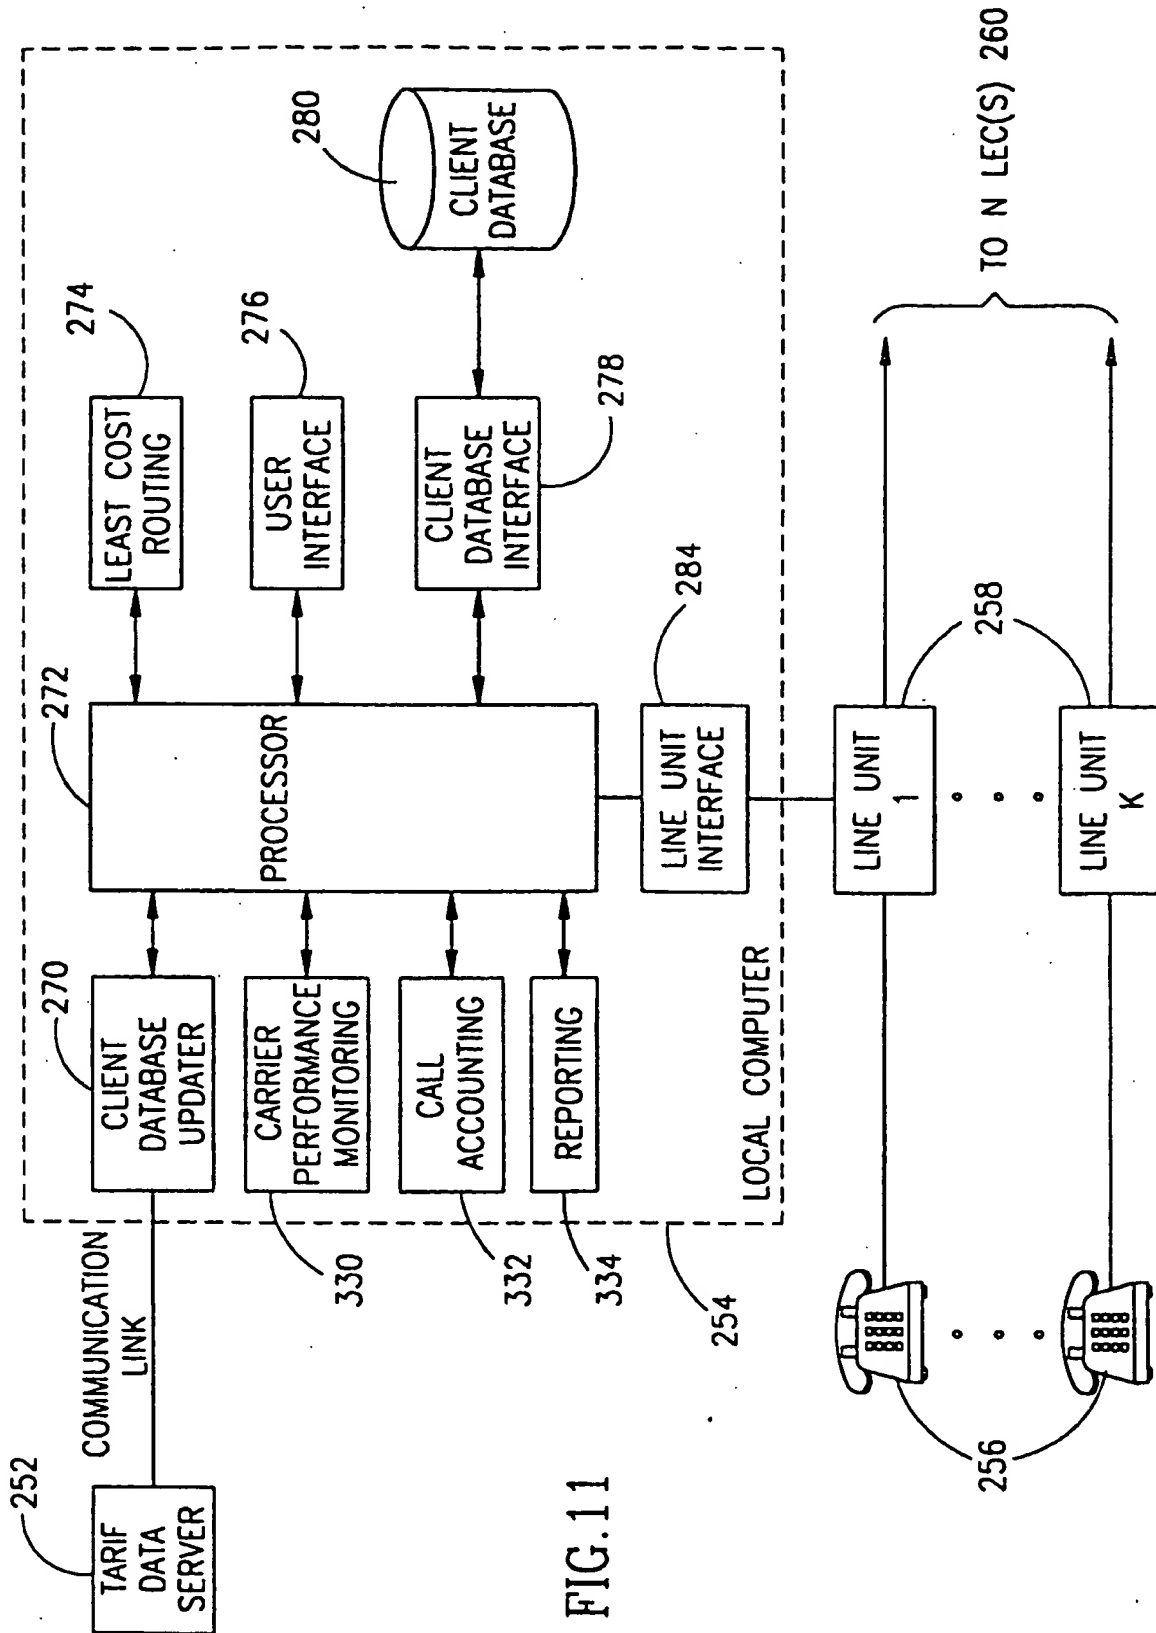


FIG.10



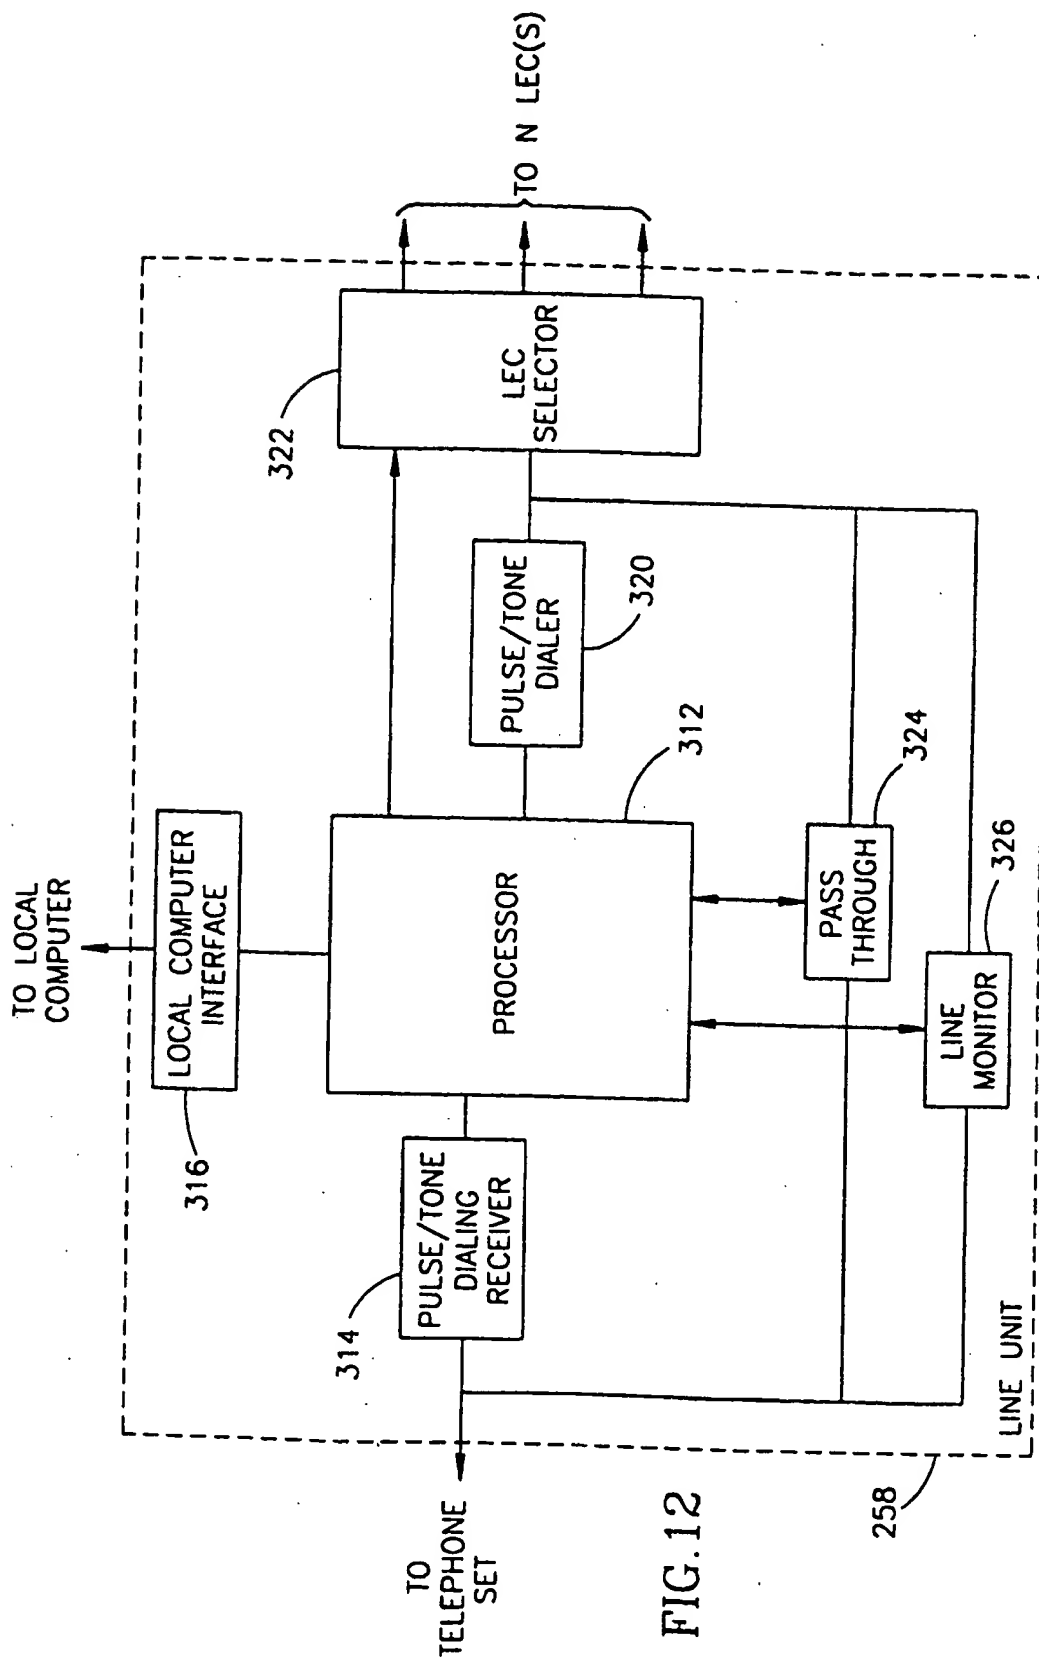


FIG. 12

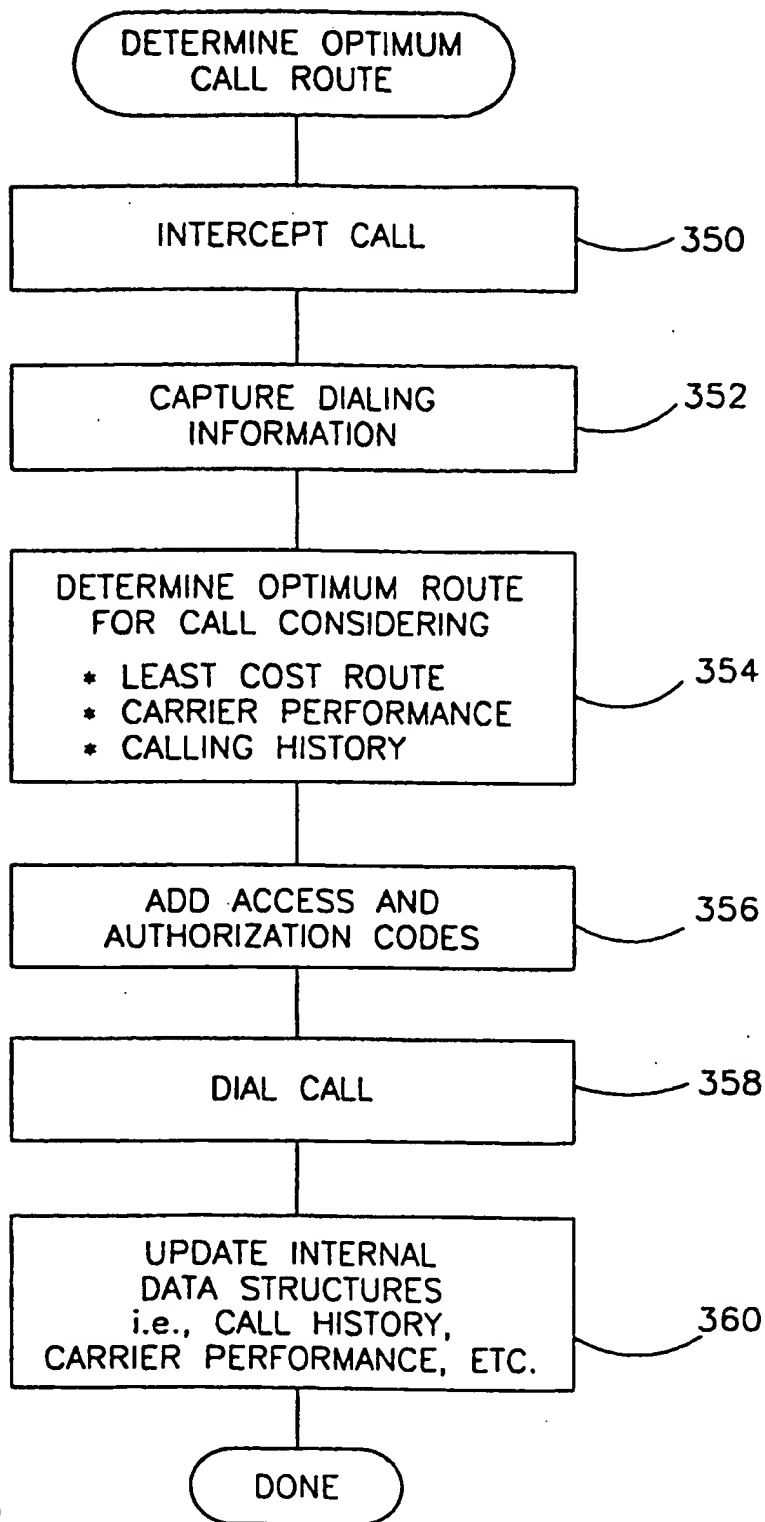


FIG.13

FIG. 14

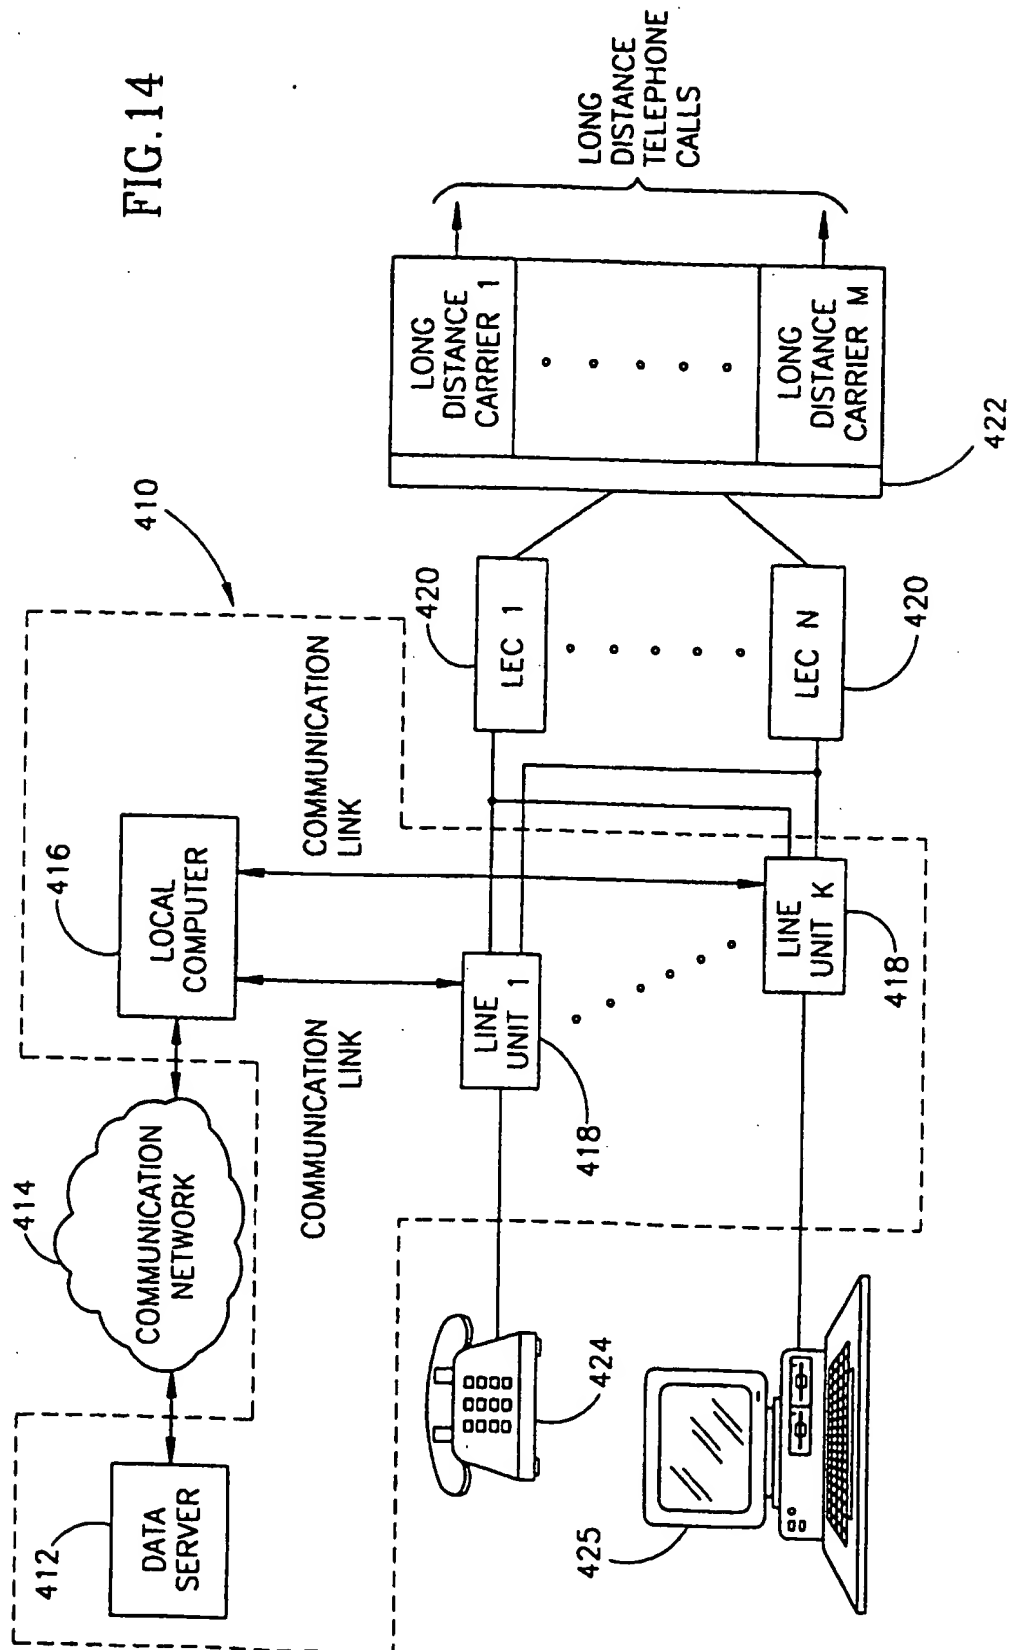


FIG. 15

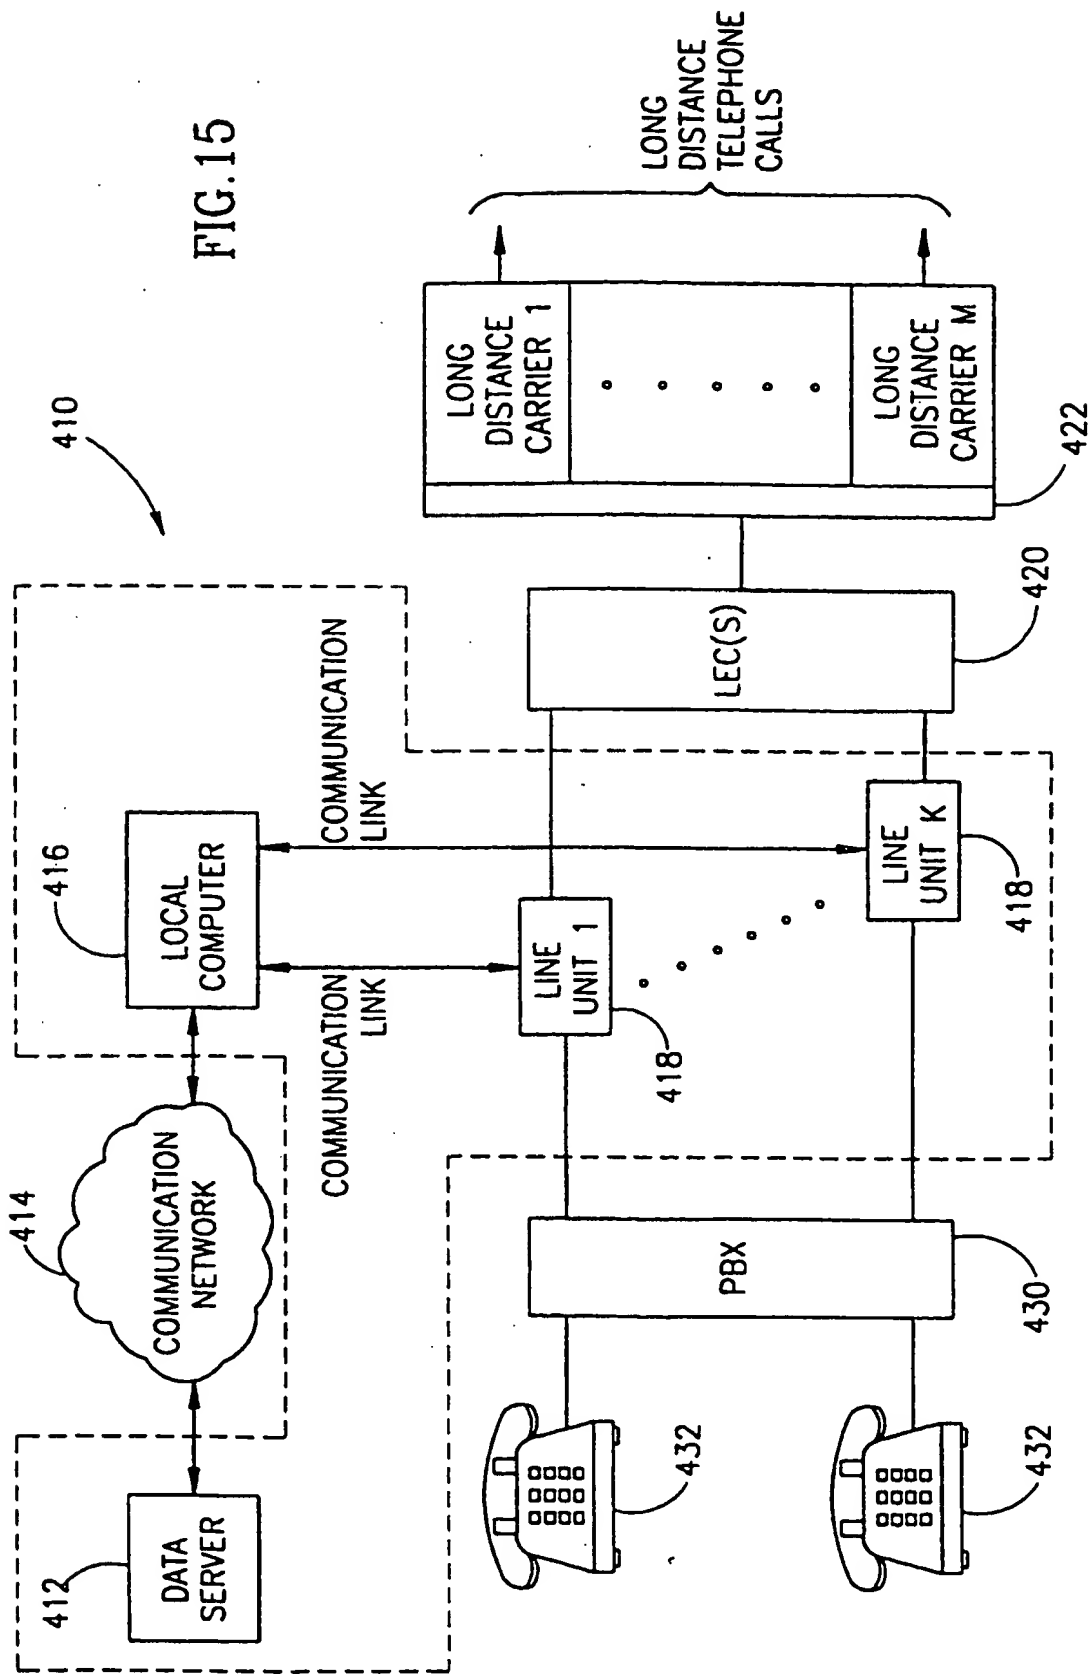


FIG. 16

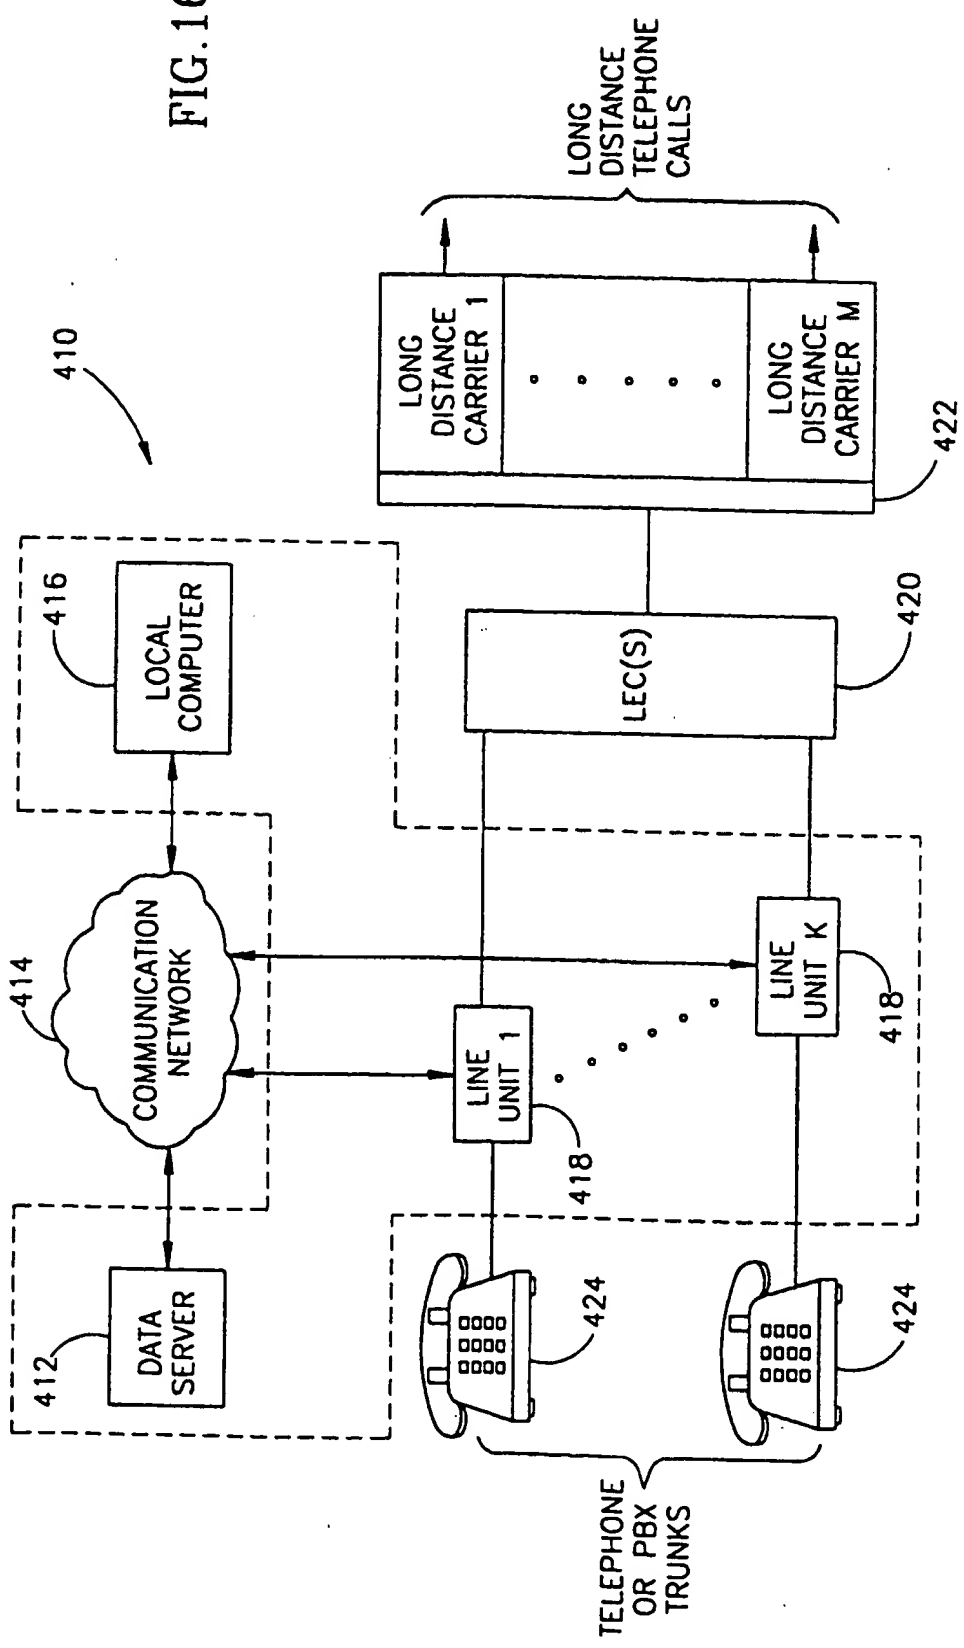
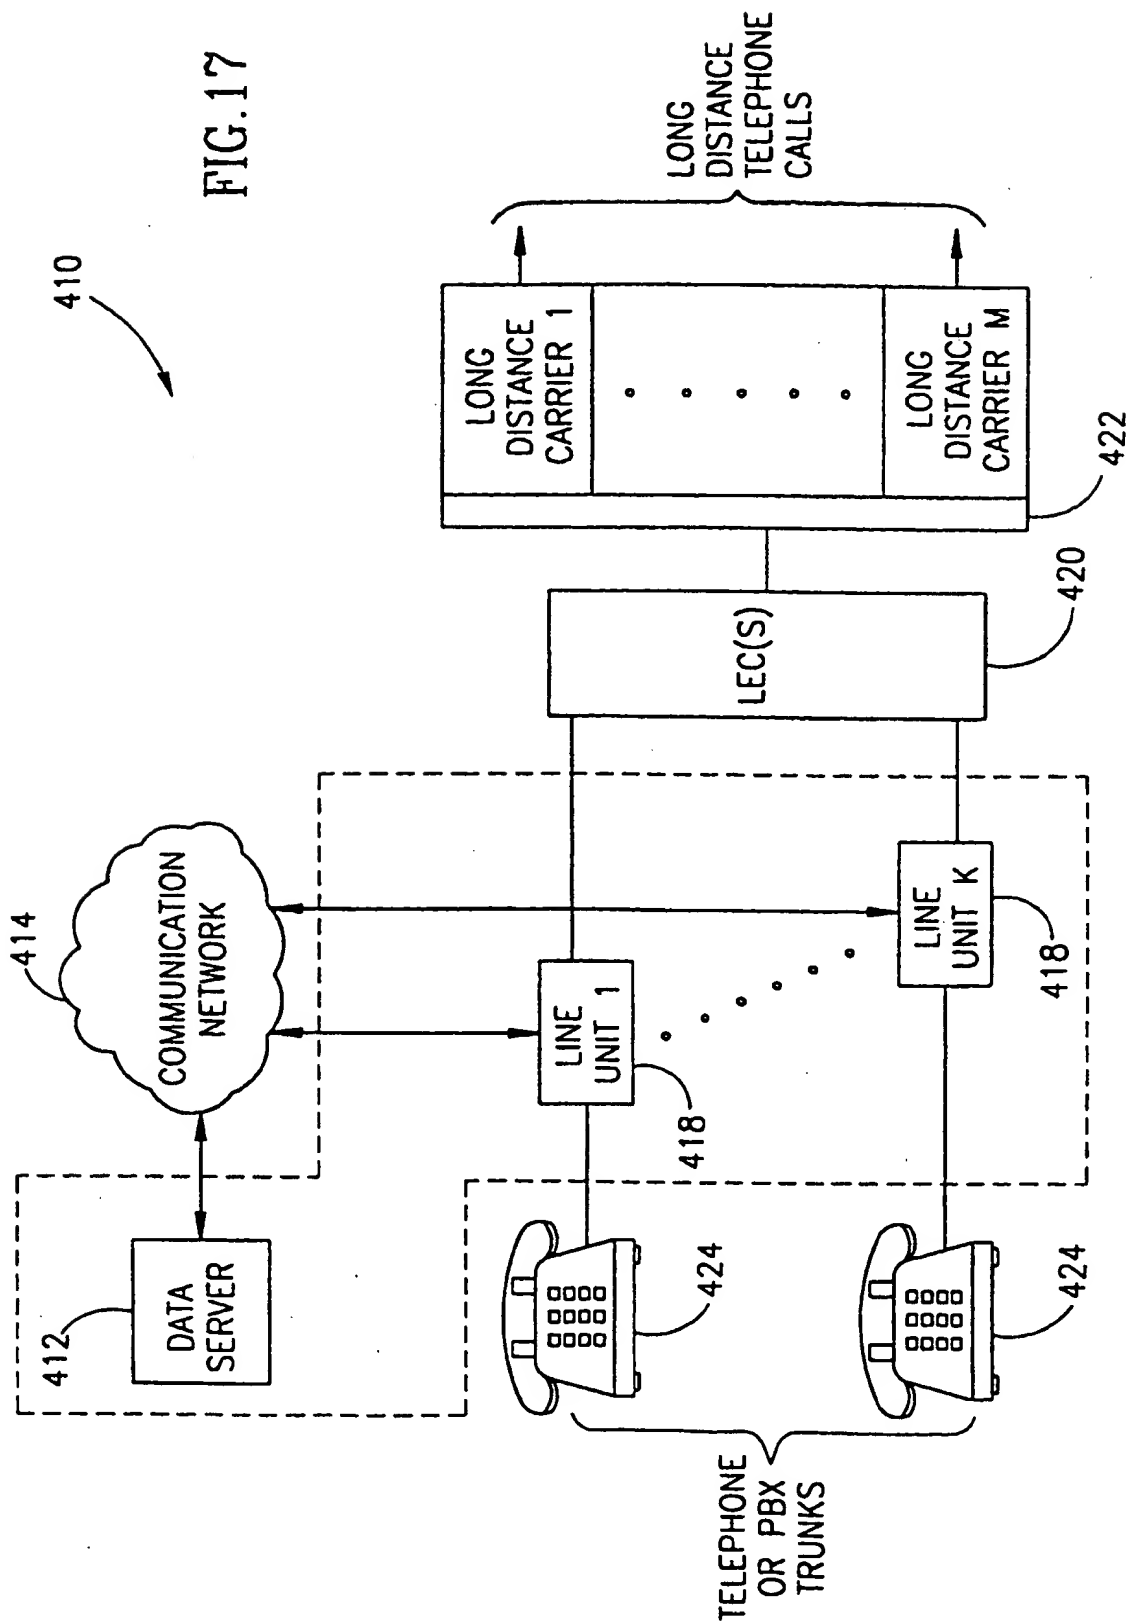


FIG. 17



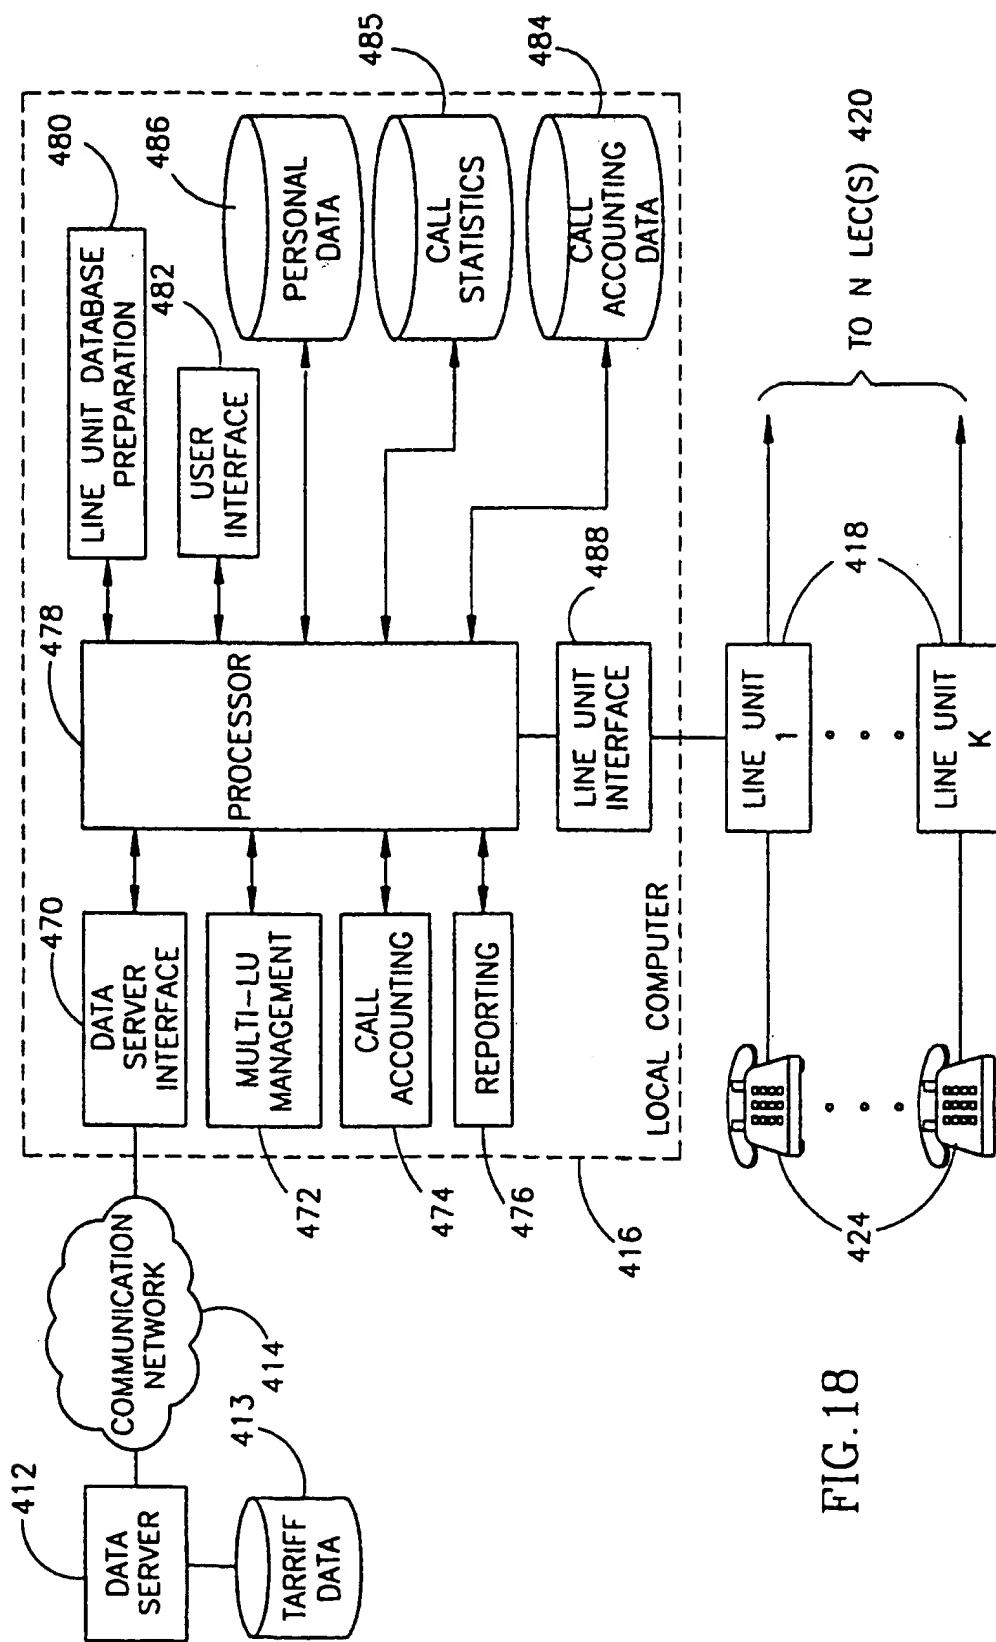


FIG. 18

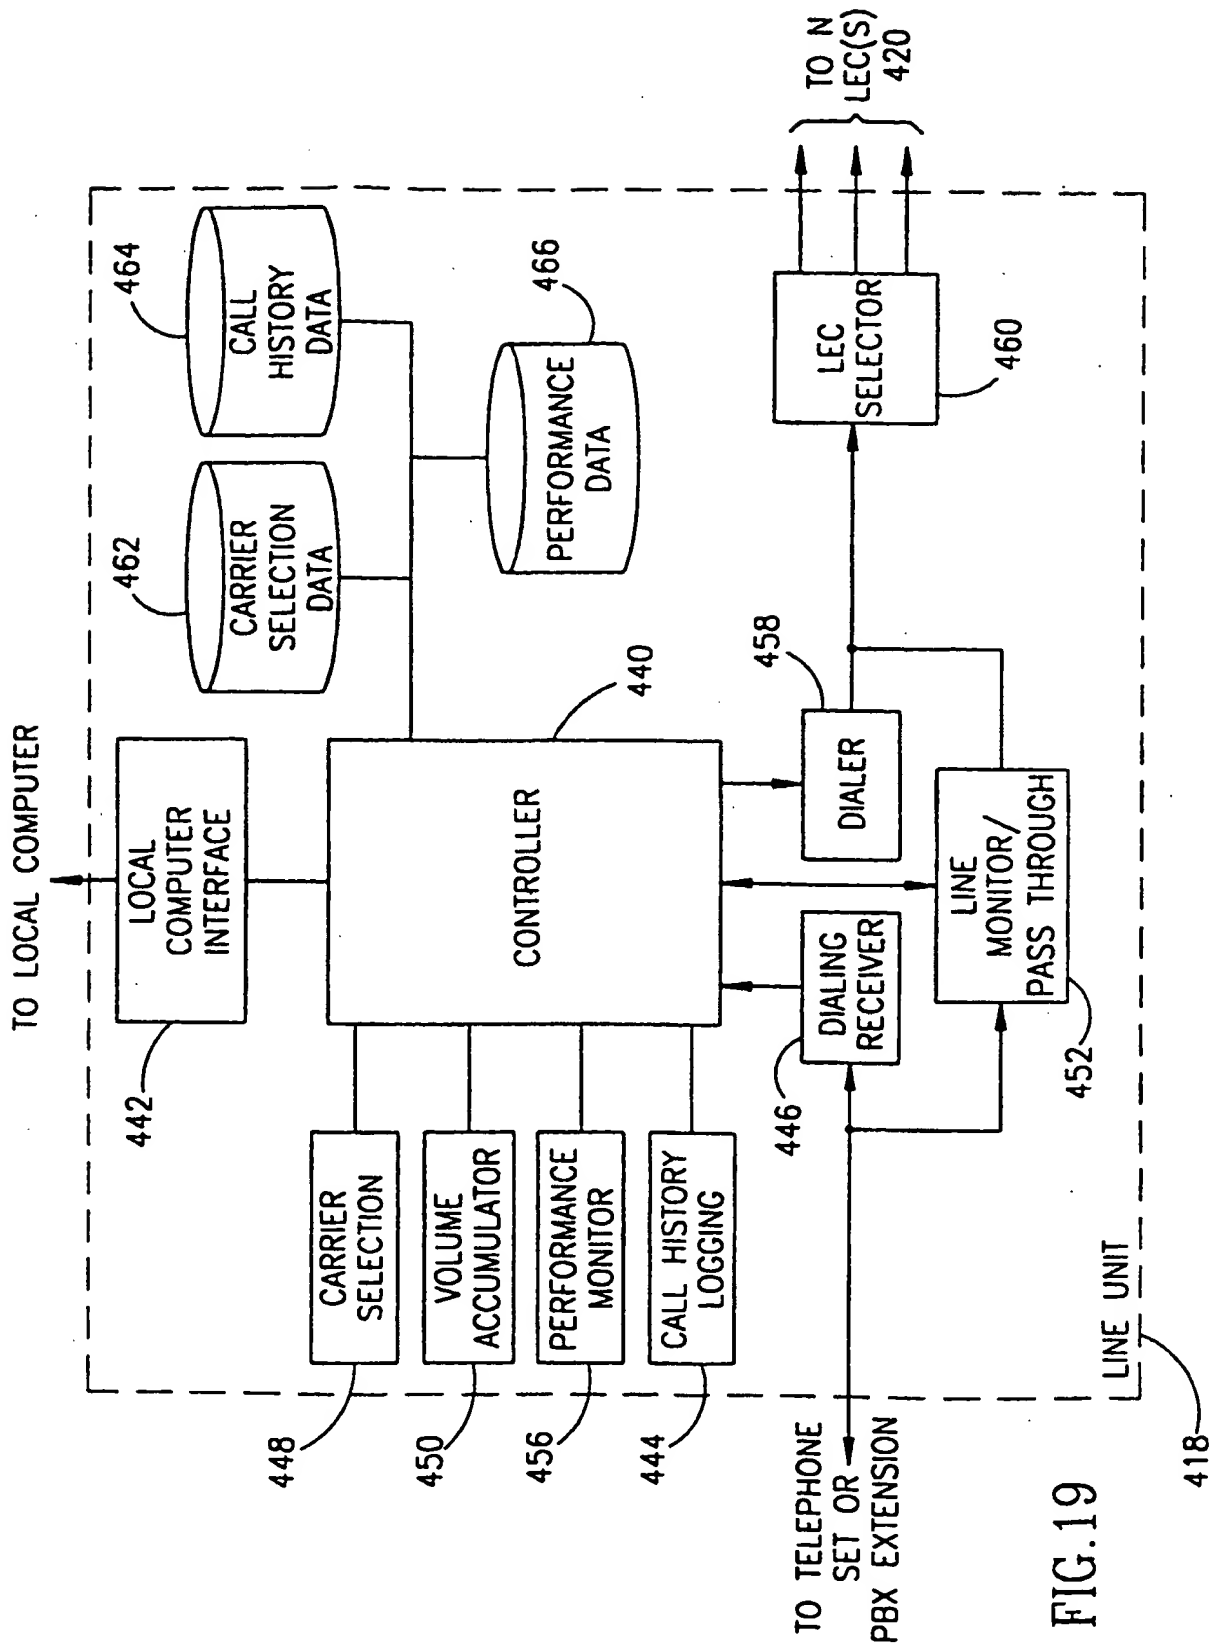


FIG. 19

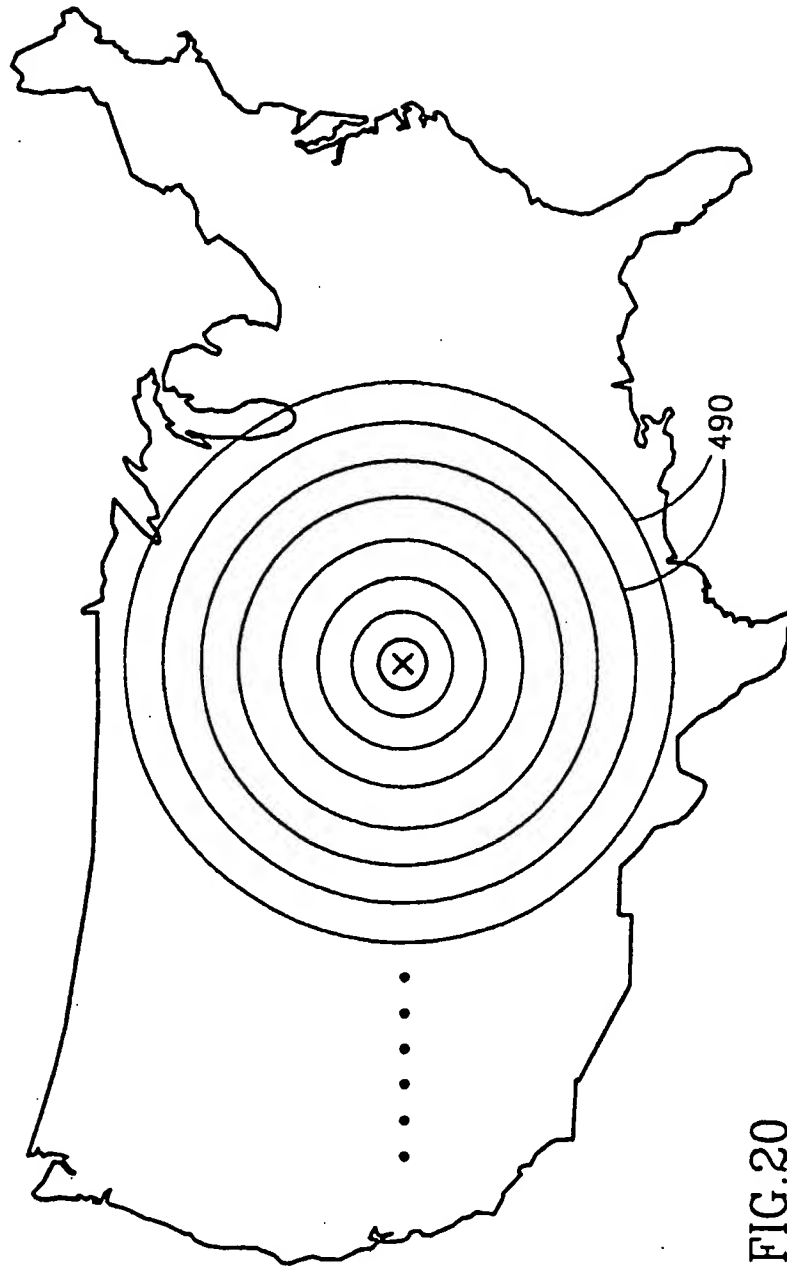
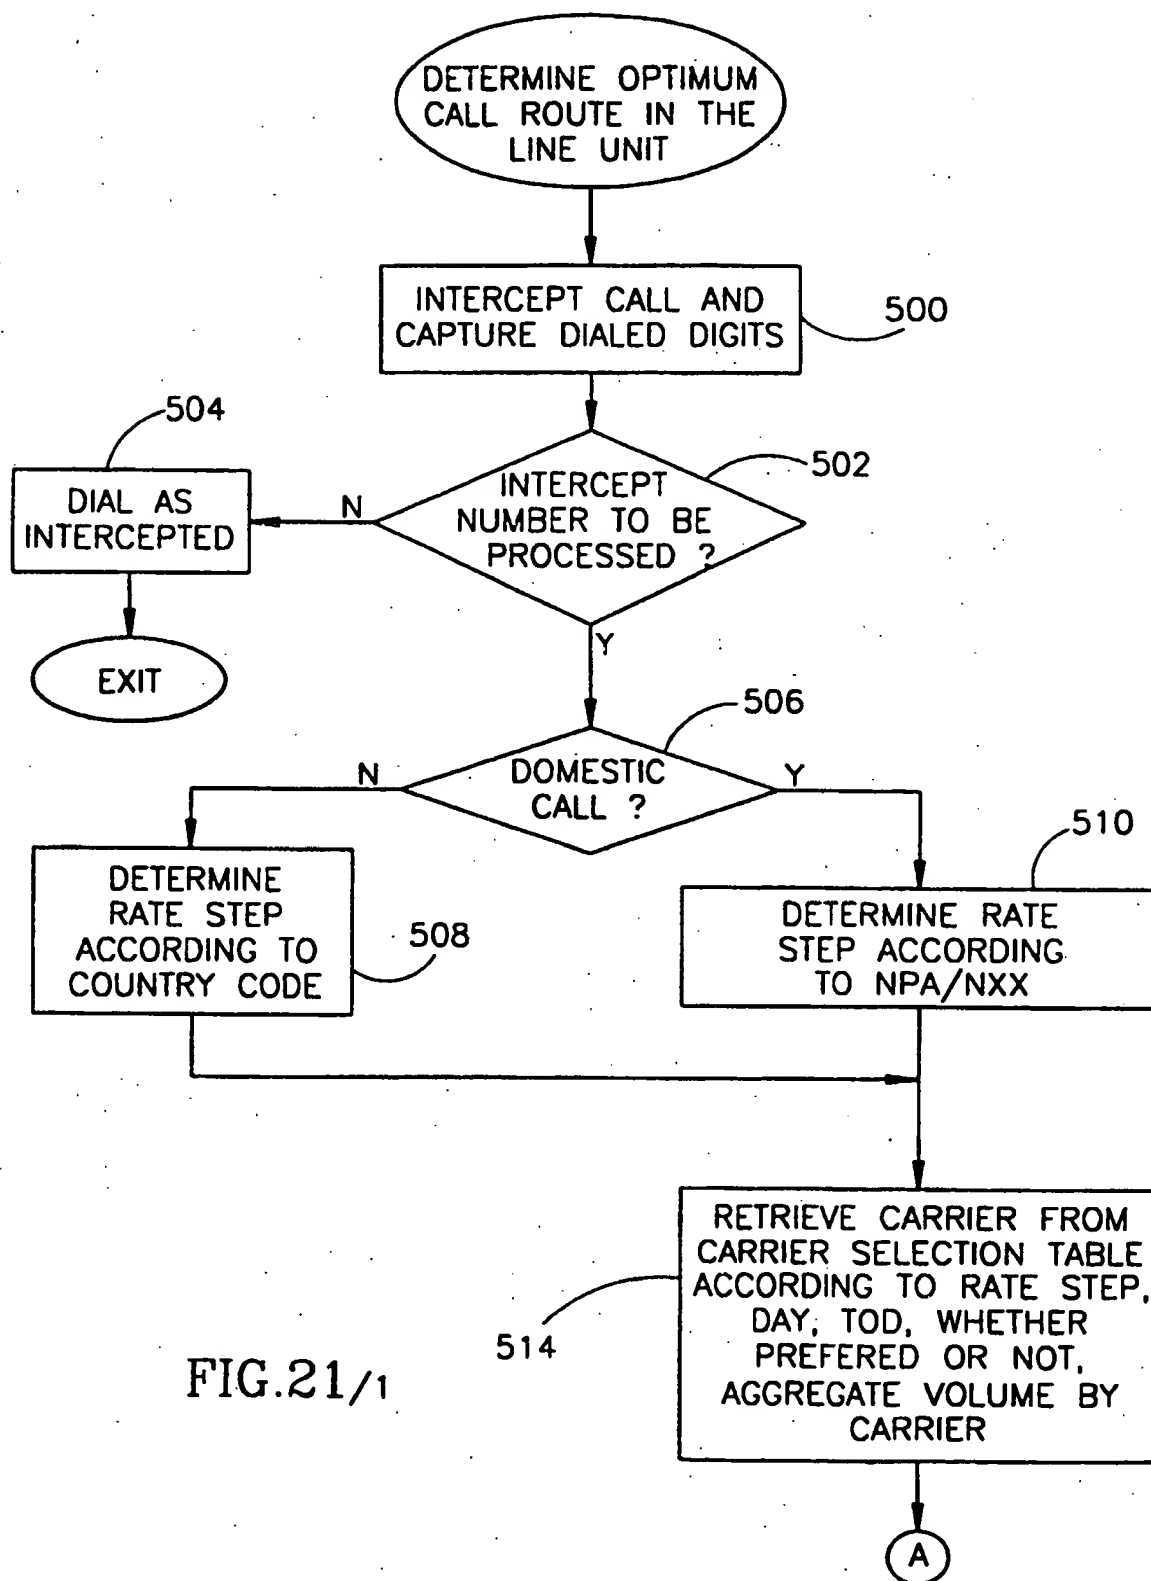


FIG.20



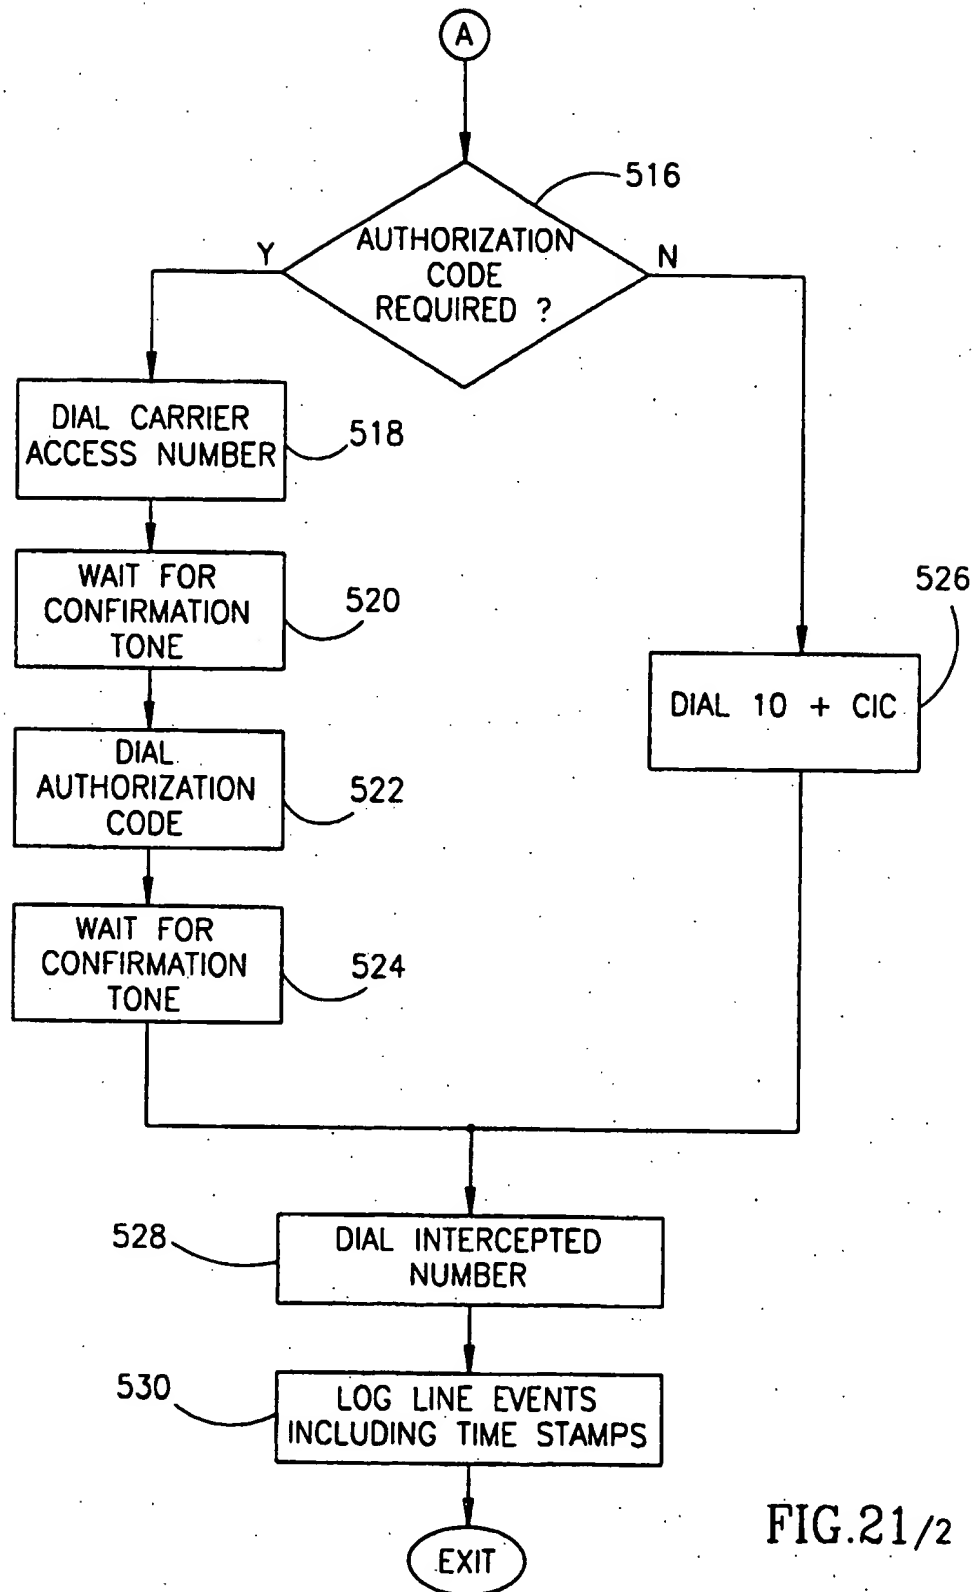


FIG.21/2

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6:

H04M 15/00, 3/42, 7/00

A3

(11) International Publication Number:

WO 97/05749

(43) International Publication Date:

13 February 1997 (13.02.97)

(21) International Application Number: PCT/IL96/00056

(22) International Filing Date: 16 July 1996 (16.07.96)

(30) Priority Data:

08/505,024

21 July 1995 (21.07.95)

US

08/610,617

4 March 1996 (04.03.96)

US

(60) Parent Application or Grant

(63) Related by Continuation

US

98/610,617 (CIP)

Filed on

4 March 1996 (04.03.96)

(71) Applicant (for all designated States except US): CALL MANAGEMENT LTD. (IL/IL); 2 Levi Eshkol Street, 43703 Ra'anana (IL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): WULKAN, Itzhak (IL/IL); 23 Golomb Street, 43303 Ra'anana (IL). BARAK, Gideon (IL/IL); 41 Hahursha Street, 43613 Ra'anana (IL).

(74) Agent: A. TALLY EITAN - ZEEV PEARL & CO.; Lumir House, 22 Maskit Street, 46733 Herzlia (IL).

(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published


With international search report.

Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(88) Date of publication of the international search report:

27 March 1997 (27.03.97)

(54) Title: TELECOMMUNICATIONS CALL MANAGEMENT SYSTEM

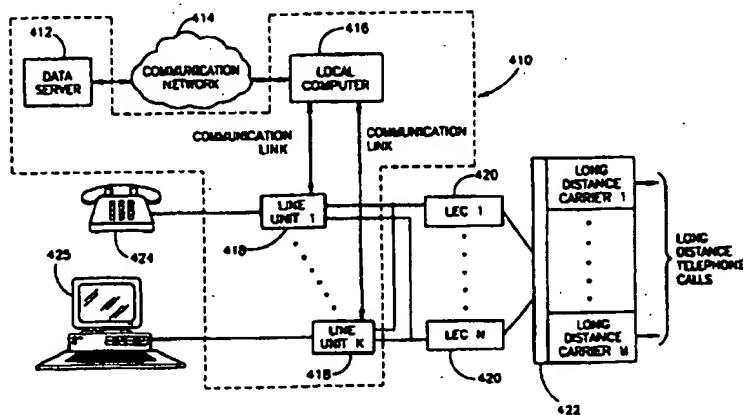

(57) Abstract

A call management system is disclosed for choosing the optimum carrier for calls made by a user (18). The system can interface with an existing PBX (120) or which can be used with ordinary analog or ISDN telephone lines. The system includes a data server (412), a local computer (416), and one or more line units. The line unit intercepts the dialed digits and transmits them to the local client computer for determining an optimum route for the call based on various parameters and transmits the complete dialing string back to the line unit which does the actual dialing of digits. The local computer also includes a carrier performance monitoring unit and call accounting unit. The client database is updated on a periodic basis via, for example, electronic mail or FTP over the internet.


FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

INTERNATIONAL SEARCH REPORT

International application No.
PCT/IL96/00056

A. CLASSIFICATION OF SUBJECT MATTER IPC(6) : H04M 15/00, 3/42, 7/00 US CL : 379/111,112,113,114,115,130,131,133,140,207,219,220,230,231 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) U.S. : 379/111,112,113,114,115,130,131,133,140,207,219,220,230,231 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US, A, 4,751,728(TREAT) 14 June 1988, figures 1-2; summary; col.3, line 10-col.4, line 68	1-6
Y		7-11
X	US, A, 5,519,769(WEINBERGER ET AL) 21 May 1996, figures 2, 4-8; col.4, line 37-col. 6, line 20	16-20
Y		7-15
Y	US, A, 5,420,914(BLUMHARDT) 30 May 1995, figures 3-4; summary; col.4, line 40-col.6, line 30	12-15
A	US, A, 4,585,904(MINCONE ET AL) 29 April 1986, figures 2-6; summary; col.3, line 62-col.13, line 55	1-20
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "G" document member of the same patent family		
Date of the actual completion of the international search 13 DECEMBER 1996		Date of mailing of the international search report 11 FEB 1997
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703) 305-3230		Authorized officer  VIJAY SHANKAR Telephone No. (703) 305-4763

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IL96/00056

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US, A, 4,791,665 (BOGART ET AL) 13 December 1988; figures 1-4; col.3, line 1-col.8, line 18	21-73
A,P	US, A, 5,515,425 (PENZIAS ET AL) 07 May 1996; figures 1-6; summary; col.2, line 31-col.9, line 11	1-73

Form PCT/ISA/210 (continuation of second sheet)(July 1992)*

INTERNATIONAL SEARCH REPORT

International Application No.
PCT/IL96/00056

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This international report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

Please See Extra Sheet.

1. ☒ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
☐ No protest accompanied the payment of additional search fees.

Form PCT/ISA/210 (continuation of first sheet(1))(July 1992)*

BOX II. OBSERVATIONS WHERE UNITY OF INVENTION WAS LACKING

This ISA found multiple inventions as follows:

Group I

Claims 1-6 are drawn to a method of determining an optimum telecommunication carrier from a group of carriers for placing a telephone call dialed by a user, classified in Class 379, subclass 130.

Group II

Claims 7-15 are drawn to the call management system comprising a means for generating call history data and statistics of phone calls, and the least cost router for determining from the database the least cost carrier for the call, classified in Class 379, subclass 114.

Group III

Claims 16-20 drawn to a call management system for updating the remote databases storing tariffs of telephone service providers, Classified in Class 379, subclass 112.

Group IV

Claims 21-73 are drawn to a telecommunications call management system for determining the optimum route for telephone calls made by the users of PBX, the system comprising a tariff data server for managing a database containing tariff and geographical related information on local and long distance carriers, first communication link coupling the tariff data server to a local computer and a second communication link coupling the local computer to the one line unit, classified in Class 379, subclass 115.

Detailed Reasons For Holding Lack Of Unity Of Invention The Claims of the four different groups are directed to different inventions and do not have in common the same special technical features. In particular group I describes a method of determining an optimum telecommunication carrier from a group of telecommunication carrier whereas group II describes a call management system for generating call history data and statistics of phone calls to generate expected call durations, volume predictions and statistical distributions. The group III describes a system for updating the remote databases storing tariffs of telephone service providers and group IV describes a system for determining the optimum route for telephone calls made by the users of PBX, managing database containing geographical related information on local and long distance carriers, which do not share the same special technical features with each other or the other groups.